

APPLE II[®]

REFERENCE MANUAL

<http://www.turbo-2.com/apple>



 apple computer inc.

NOTICE

Apple Computer Inc. reserves the right to make improvements in the product described in this manual at any time and without notice.

DISCLAIMER OF ALL WARRANTIES AND LIABILITY

APPLE COMPUTER INC. MAKES NO WARRANTIES, EITHER EXPRESS OR IMPLIED, WITH RESPECT TO THIS MANUAL OR WITH RESPECT TO THE SOFTWARE DESCRIBED IN THIS MANUAL, ITS QUALITY, PERFORMANCE, MERCHANTABILITY, OR FITNESS FOR ANY PARTICULAR PURPOSE. APPLE COMPUTER INC. SOFTWARE IS SOLD OR LICENSED "AS IS." THE ENTIRE RISK AS TO ITS QUALITY AND PERFORMANCE IS WITH THE BUYER. SHOULD THE PROGRAMS PROVE DEFECTIVE FOLLOWING THEIR PURCHASE, THE BUYER (AND NOT APPLE COMPUTER INC., ITS DISTRIBUTOR, OR ITS RETAILER) ASSUMES THE ENTIRE COST OF ALL NECESSARY SERVICING, REPAIR, OR CORRECTION AND ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES. IN NO EVENT WILL APPLE COMPUTER INC. BE LIABLE FOR DIRECT, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT IN THE SOFTWARE, EVEN IF APPLE COMPUTER INC. HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF IMPLIED WARRANTIES OR LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

This manual is copyrighted. All rights are reserved. This document may not, in whole or part, be copied, photocopied, reproduced, translated or reduced to any electronic medium or machine readable form without prior consent, in writing, from Apple Computer Inc.

© 1979, 1981 by APPLE COMPUTER INC.
10260 Bandlely Drive
Cupertino, California 95014
(408) 996-1010

The word Apple and the Apple Logo are registered trademarks of APPLE COMPUTER INC.

APPLE Product #A2L0001A
(030-0004-C)

WARNING: This equipment has been certified to comply with the limits for a Class B computing device, pursuant to Subpart J of Part 15 of FCC Rules. Only peripherals (computer input/output devices, terminals, printers, etc.) certified to comply with the Class B limits may be attached to this computer. Operation with non-certified peripherals is likely to result in interference to radio and TV reception.

Apple II Reference Manual

A REFERENCE MANUAL
FOR THE APPLE II
AND THE APPLE II PLUS
PERSONAL COMPUTERS

TABLE OF CONTENTS

CHAPTER 1 APPROACHING YOUR APPLE

2	THE POWER SUPPLY
3	THE MAIN BOARD
4	TALKING TO YOUR APPLE
5	THE KEYBOARD
6	READING THE KEYBOARD
9	THE APPLE VIDEO DISPLAY
9	THE VIDEO CONNECTOR
10	EURAPPLE (50 HZ) MODIFICATION
10	SCREEN FORMAT
12	SCREEN MEMORY
12	SCREEN PAGES
12	SCREEN SWITCHES
14	THE TEXT MODE
17	THE LOW-RESOLUTION GRAPHICS (LO-RES) MODE
19	THE HIGH-RESOLUTION GRAPHICS (HI-RES) MODE
20	OTHER INPUT/OUTPUT FEATURES
20	THE SPEAKER
22	THE CASSETTE INTERFACE
23	THE GAME I/O CONNECTOR
23	ANNUNCIATOR OUTPUTS
24	ONE-BIT INPUTS
24	ANALOG INPUTS
25	STROBE OUTPUT
25	VARIETIES OF APPLES
25	AUTOSTART ROM / MONITOR ROM
26	REVISION 0 / REVISION 1 BOARD
27	POWER SUPPLY CHANGES
27	THE APPLE II PLUS

CHAPTER 2

CONVERSATION WITH APPLES

- 30 STANDARD OUTPUT
- 30 THE STOP-LIST FEATURE
- 31 BUT SOFT, WHAT LIGHT THROUGH YONDER WINDOW BREAKS!
(OR, THE TEXT WINDOW)
- 32 SEEING IT ALL IN BLACK AND WHITE
- 32 STANDARD INPUT
- 32 RDKEY
- 33 GETLN
- 34 ESCAPE CODES
- 36 THE RESET CYCLE
- 36 AUTOSTART ROM RESET
- 37 AUTOSTART ROM SPECIAL LOCATIONS
- 38 "OLD MONITOR" ROM RESET

CHAPTER 3

THE SYSTEM MONITOR

- 40 ENTERING THE MONITOR
- 40 ADDRESSES AND DATA
- 41 EXAMINING THE CONTENTS OF MEMORY
- 41 EXAMINING SOME MORE MEMORY
- 43 EXAMINING STILL MORE MEMORY
- 43 CHANGING THE CONTENTS OF A LOCATION
- 44 CHANGING THE CONTENTS OF CONSECUTIVE LOCATIONS
- 44 MOVING A RANGE OF MEMORY
- 46 COMPARING TWO RANGES OF MEMORY
- 46 SAVING A RANGE OF MEMORY ON TAPE
- 47 READING A RANGE FROM TAPE
- 48 CREATING AND RUNNING MACHINE LANGUAGE PROGRAMS
- 49 THE MINI-ASSEMBLER

51	DEBUGGING PROGRAMS
53	EXAMINING AND CHANGING REGISTERS
54	MISCELLANEOUS MONITOR COMMANDS
55	SPECIAL TRICKS WITH THE MONITOR
57	CREATING YOUR OWN COMMANDS
59	SUMMARY OF MONITOR COMMANDS
61	SOME USEFUL MONITOR SUBROUTINES
65	MONITOR SPECIAL LOCATIONS
66	MINI-ASSEMBLER INSTRUCTION FORMATS

CHAPTER 4

MEMORY ORGANIZATION

68	RAM STORAGE
70	RAM CONFIGURATION BLOCKS
72	ROM STORAGE
73	I/O LOCATIONS
74	ZERO PAGE MEMORY MAPS

CHAPTER 5

INPUT/OUTPUT STRUCTURE

- 78 BUILT-IN I/O
- 79 PERIPHERAL BOARD I/O
- 80 PERIPHERAL CARD I/O SPACE
- 80 PERIPHERAL CARD ROM SPACE
- 81 I/O PROGRAMMING SUGGESTIONS
- 82 PERIPHERAL SLOT SCRATCHPAD RAM
- 83 THE CSW/KSW SWITCHES
- 84 EXPANSION ROM

CHAPTER 6

HARDWARE CONFIGURATION

- 88 THE MICROPROCESSOR
- 90 SYSTEM TIMING
- 92 POWER SUPPLY
- 94 ROM MEMORY
- 95 RAM MEMORY
- 96 THE VIDEO GENERATOR
- 97 VIDEO OUTPUT JACKS
- 98 BUILT-IN I/O
- 99 "USER 1" JUMPER
- 100 THE GAME I/O CONNECTOR
- 100 THE KEYBOARD
- 102 KEYBOARD CONNECTOR
- 103 CASSETTE INTERFACE JACKS
- 104 POWER CONNECTOR
- 105 SPEAKER
- 105 PERIPHERAL CONNECTORS

- 117 APPENDIX A
THE 6502 INSTRUCTION SET
- 129 APPENDIX B
SPECIAL LOCATIONS
- 135 APPENDIX C
ROM LISTINGS
- 177 GLOSSARY
- 185 BIBLIOGRAPHY

INDEX

- 190 GENERAL INDEX
- 194 INDEX OF FIGURES
- 195 INDEX OF PHOTOS
- 195 INDEX OF TABLES
- 195 CAST OF CHARACTERS

INTRODUCTION

This is the User Reference Manual for the Apple II and Apple II Plus personal computers. Like the Apple itself, this book is a tool. As with all tools, you should know a little about it before you start to use it.

This book will not teach you how to program. It is a book of facts, not methods. If you have just unpacked your Apple, or you do not know how to program in any of the languages available for it, then before you continue with this book, read one of the other manuals accompanying your Apple. Depending upon which variety of Apple you have purchased, you should have received one of the following:

Apple II BASIC Programming Manual
(part number A2L0005)

The Applesoft Tutorial
(part number A2L0018)

These are tutorial manuals for versions of the BASIC language available on the Apple. They also include complete instructions on setting up your Apple. The Bibliography at the end of this manual lists other books which may interest you.

There are a few different varieties of Apples, and this manual applies to all of them. It is possible that some of the features noted in this manual will not be available on your particular Apple. In places where this manual mentions features which are not universal to all Apples, it will use a footnote to warn you of these differences.

This manual describes the Apple II computer and its parts and procedures. There are sections on the System Monitor, the input/output devices and their operation, the internal organization of memory and input/output devices, and the actual electronic design of the Apple itself. For information on any other Apple hardware or software product, please refer to the manual accompanying that product.

RADIO AND TELEVISION INTERFERENCE

The equipment described in this manual generates and uses radio frequency energy. If it is not installed and used properly, that is in strict accordance with our instructions, it may cause interference to radio and television reception.

This equipment has been tested and complies with the limits for a Class B computing device in accordance with the specifications in Subpart J of Part 15 of FCC rules. These rules are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that the interference will not occur in a particular installation.

You can determine whether your computer is causing interference by turning it off. If the interference stops, it was probably caused by the computer. If your computer does cause interference to radio or television reception, you can try to correct the interference by using one or more of the following measures:

- Turn the TV or radio antenna until the interference stops.
- Move the computer to one side or the other of the TV or radio.
- Move the computer farther away from the TV or radio.
- Plug the computer into an outlet that is on a different circuit from the TV or radio. (That is, make certain the computer and the TV or radio are on circuits controlled by different circuit breakers or fuses.)

If necessary, you should consult your dealer or an experienced radio/television technician for additional suggestions. You may find the following booklet prepared by the Federal Communications Commission helpful:

"How to Identify and Resolve Radio-TV Interference Problems"

This booklet is available from the U.S. Government Printing Office, Washington, DC 20402, Stock number 004-000-00345-4.

CHAPTER 1

APPROACHING YOUR APPLE

- 2 THE POWER SUPPLY
- 3 THE MAIN BOARD
- 4 TALKING TO YOUR APPLE
- 5 THE KEYBOARD
- 6 READING THE KEYBOARD
- 9 THE APPLE VIDEO DISPLAY
- 9 THE VIDEO CONNECTOR
- 10 EURAPPLE (50 HZ) MODIFICATION
- 10 SCREEN FORMAT
- 12 SCREEN MEMORY
- 12 SCREEN PAGES
- 12 SCREEN SWITCHES
- 14 THE TEXT MODE
- 17 THE LOW-RESOLUTION GRAPHICS (LO-RES) MODE
- 19 THE HIGH-RESOLUTION GRAPHICS (HI-RES) MODE
- 20 OTHER INPUT/OUTPUT FEATURES
- 20 THE SPEAKER
- 22 THE CASSETTE INTERFACE
- 23 THE GAME I/O CONNECTOR
- 23 ANNUNCIATOR OUTPUTS
- 24 ONE-BIT INPUTS
- 24 ANALOG INPUTS
- 25 STROBE OUTPUT
- 25 VARIETIES OF APPLES
- 25 AUTOSTART ROM / MONITOR ROM
- 26 REVISION 0 / REVISION 1 BOARD
- 27 POWER SUPPLY CHANGES
- 27 THE APPLE II PLUS

For detailed information on setting up your Apple, refer to Chapter 1 of either the **Apple BASIC Programming Manual** or **The Applesoft Tutorial**.

In this manual, all directional instructions will refer to this orientation: with the Apple's typewriter-like keyboard facing you, "front" and "down" are towards the keyboard, "back" and "up" are away. Remove the lid of the Apple by prying up the back edge until it "pops", then pull straight back on the lid and lift it off.

This is what you will see:

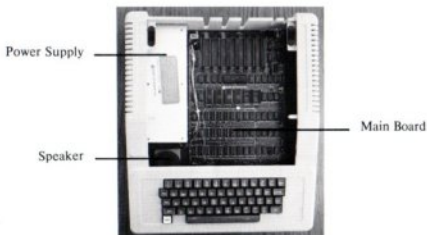


Photo 1. The Apple II.

THE POWER SUPPLY

The metal box on the left side of the interior is the Power Supply. It supplies four voltages: +5v, -5.2v, +11.8v, and -12.0v. It is a high-frequency "switching"-type power supply, with many protective features to ensure that there can be no imbalances between the different supplies. The main power cord for the computer plugs directly into the back of the power supply. The power-on switch is also on the power supply itself, to protect you and your fingers from accidentally becoming part of the high-voltage power supply circuit.



110 volt model



110/220 volt model

Photo 2. The back of the Apple Power Supply.

THE MAIN BOARD

The large green printed circuit board which takes up most of the bottom of the case is the computer itself. There are two slightly different models of the Apple II main board: the original (Revision 0) and the Revision 1 board. The slight differences between the two lie in the electronics on the board. These differences are discussed throughout this book. A summary of the differences appears in the section "Varieties of Apples" on page 25.

On this board there are about eighty integrated circuits and a handful of other components. In the center of the board, just in front of the eight gold-toothed edge connectors ("slots") at the rear of the board, is an integrated circuit larger than all others. This is the brain of your Apple. It is a Synertek/MOS Technology 6502 microprocessor. In the Apple, it runs at a rate of 1,023,000 machine cycles per second and can do over five hundred thousand addition or subtraction operations in one second. It has an addressing range of 65,536 eight-bit bytes. Its repertory includes 56 instructions with 13 addressing modes. This microprocessor and other versions of it are used in many computers systems, as well as other types of electronic equipment.

Just below the microprocessor are six sockets which may be filled with from one to six slightly smaller integrated circuits. These ICs are the Read-Only Memory (ROM) "chips" for the Apple. They contain programs for the Apple which are available the moment you turn on the power. Many programs are available in ROM, including the Apple System Monitor, the Apple Autostart Monitor, Apple Integer BASIC and Applesoft II BASIC, and the Apple *Programmer's Aid #1* utility subroutine package. The number and contents of your Apple's ROMs depend upon which type of Apple you have, and the accessories you have purchased.

Right below the ROMs and the central mounting nut is an area marked by a white square on the board which encloses twenty-four sockets for integrated circuits. Some or all of these may be filled with ICs. These are the main Random Access Memory (RAM) "chips" for your Apple. An Apple can hold 4,096 to 49,152 bytes of RAM memory in these three rows of components.* Each row can hold eight ICs of either the 4K or 16K variety. A row must hold eight of the same

* You can extend your RAM memory to 64K by purchasing the Apple Language Card, part of the Apple Language System (part number A2B0006).

type of memory components, but the two types can both be used in various combinations on different rows to give nine different memory sizes.* The RAM memory is used to hold all of the programs and data which you are using at any particular time. The information stored in RAM disappears when the power is turned off.

The other components on the Apple II board have various functions: they control the flow of information from one part of the computer to another, gather data from the outside world, or send information to you by displaying it on a television screen or making a noise on a speaker.

The eight long peripheral slots on the back edge of the Apple's board can each hold a peripheral card to allow you to extend your RAM or ROM memory, or to connect your Apple to a printer or other input/output device. These slots are sometimes called the Apple's "backplane" or "mother board".

TALKING TO YOUR APPLE

Your link to your Apple is at your fingertips. Most programs and languages that are used with the Apple expect you to talk to them through the Apple's keyboard. It looks like a normal typewriter keyboard, except for some minor rearrangement and a few special keys. For a quick review on the keyboard, see pages 6 through 12 in the **Apple II BASIC Programming Manual** or pages 5 through 11 in **The Applesoft Tutorial**.

Since you're talking with your fingers, you might as well be hearing with your eyes. The Apple will tell you what it is doing by displaying letters, numbers, symbols, and sometimes colored blocks and lines on a black-and-white or color television set.

* The Apple II is designed to use both the 16K and the less expensive 4K RAMs. However, due to the greater availability and reduced cost of the 16K chips, Apple now supplies only the 16K RAMs.

THE KEYBOARD

The Apple Keyboard

Number of Keys:	52		
Coding:	Upper Case ASCII		
Number of codes:	91		
Output:	Seven bits, plus strobe		
Power requirements:	+5v at 120mA -12v at 50mA		
Rollover:	2 key		
Special keys:	CTRL ESC RESET REPT — —		
Memory mapped locations:			
	Hex	Decimal	
Data	SC000	49152	-16384
Clear	SC010	49168	-16368

The Apple II has a built-in 52-key typewriter-like keyboard which communicates using the American Standard Code for Information Interchange (ASCII)*. Ninety-one of the 96 upper-case ASCII characters can be generated directly by the keyboard. Table 2 shows the keys on the keyboard and their associated ASCII codes. "Photo" 3 is a diagram of the keyboard.

The keyboard is electrically connected to the main circuit board by a 16-conductor cable with plugs at each end that plug into standard integrated circuit sockets. One end of this cable is connected to the keyboard; the other end plugs into the Apple board's keyboard connector, near the very front edge of the board, under the keyboard itself. The electrical specifications for this connector are given on page 102.

Most languages on the Apple have commands or statements which allow your program to accept input from the keyboard quickly and easily (for example, the INPUT and GET statements in BASIC). However, your programs can also read the keyboard directly.

* All ASCII codes used by the Apple normally have their high bit set. This is the same as standard mark-parity ASCII.



“Photo” 3. The Apple Keyboard.

READING THE KEYBOARD

The keyboard sends seven bits of information which together form one character. These seven bits, along with another signal which indicates when a key has been pressed, are available to most programs as the contents of a memory location. Programs can read the current state of the keyboard by reading the contents of this location. When you press a key on the keyboard, the value in this location becomes 128 or greater, and the particular value it assumes is the numeric code for the character which was typed. Table 3 on page 8 shows the ASCII characters and their associated numeric codes. The location will hold this one value until you press another key, or until your program tells the memory location to forget the character it's holding.

Once your program has accepted and understood a keypress, it should tell the keyboard's memory location to “release” the character it is holding and prepare to receive a new one. Your program can do this by referencing another memory location. When you reference this other location, the value contained in the first location will drop below 128. This value will stay low until you press another key. This action is called “clearing the keyboard strobe”. Your program can either read or write to the special memory location; the data which are written to or read from that location are irrelevant. It is the mere *reference* to the location which clears the keyboard strobe. Once you have cleared the keyboard strobe, you can still recover the code for the key which was last pressed by adding 128 (hexadecimal \$80) to the value in the keyboard location.

These are the special memory locations used by the keyboard:

Location:		Description
Hex	Decimal	
SC000	49152 -16384	Keyboard Data
SC010	49168 -16368	Clear Keyboard Strobe

The **RESET** key at the upper right-hand corner does not generate an ASCII code, but instead is directly connected to the microprocessor. When this key is pressed, all processing stops. When the key is released, the computer starts a reset cycle. See page 36 for a description of the RESET

function.

The **CTRL** and **SHIFT** keys generate no codes by themselves, but only alter the codes produced by other keys.

The **REPT** key, if pressed alone, produces a duplicate of the last code that was generated. If you press and hold down the **REPT** key while you are holding down a character key, it will act as if you were pressing that key repeatedly at a rate of 10 presses each second. This repetition will cease when you release either the character key or **REPT**.

The **POWER** light at the lower left-hand corner is an indicator lamp to show when the power to the Apple is on.

Table 2: Keys and Their Associated ASCII Codes

Key	Alone	CTRL	SHIFT	Both	Key	Alone	CTRL	SHIFT	Both
space	SA0	SA0	SA0	SA0	RETURN	S8D	S8D	S8D	S8D
Ø	SB0	SB0	SB0	SB0	G	SC7	S87	SC7	S87
!	SB1	SB1	SA1	SA1	H	SC8	S88	SC8	S88
2"	SB2	SB2	SA2	SA2	I	SC9	S89	SC9	S89
3#	SB3	SB3	SA3	SA3	J	SCA	S8A	SCA	S8A
4\$	SB4	SB4	SA4	SA4	K	SCB	S8B	SCB	S8B
5%	SB5	SB5	SA5	SA5	L	SCC	S8C	SCC	S8C
6&	SB6	SB6	SA6	SA6	M	SCD	S8D	SDD	S9D
7	SB7	SB7	SA7	SA7	N	SCE	S8E	SDE	S9E
8(SB8	SB8	SA8	SA8	O	SCF	S8F	SCF	S8F
9)	SB9	SB9	SA9	SA9	P@	SD0	S90	SC0	S80
:*	SBA	SBA	SAA	SAA	Q	SD1	S91	SD1	S91
;+	SBB	SBB	SAB	SAB	R	SD2	S92	SD2	S92
,<	SAC	SAC	SBC	SBC	S	SD3	S93	SD3	S93
-=	SAD	SAD	SBD	SBD	T	SD4	S94	SD4	S94
.>	SAE	SAE	SBE	SBE	U	SD5	S95	SD5	S95
/?	SAF	SAF	SBF	SBF	V	SD6	S96	SD6	S96
A	SC1	S81	SC1	S81	W	SD7	S97	SD7	S97
B	SC2	S82	SC2	S82	X	SD8	S98	SD8	S98
C	SC3	S83	SC3	S83	Y	SD9	S99	SD9	S99
D	SC4	S84	SC4	S84	Z	SDA	S9A	SDA	S9A
E	SC5	S85	SC5	S85	—	S88	S88	S88	S88
F	SC6	S86	SC6	S86	—	S95	S95	S95	S95
					ESC	S9B	S9B	S9B	S9B

All codes are given in hexadecimal. To find the decimal equivalents, use Table 3.

Table 3: The ASCII Character Set

Decimal:	128	144	160	176	192	208	224	240
Hex:	\$80	\$90	\$A0	\$B0	\$C0	\$D0	\$E0	\$F0
0	\$0	nul	dle		0	@	P	p
1	\$1	soh	dc1	!	1	A	Q	a
2	\$2	stx	dc2	"	2	B	R	b
3	\$3	etx	dc3	#	3	C	S	c
4	\$4	eot	dc4	\$	4	D	T	d
5	\$5	enq	nak	%	5	E	U	e
6	\$6	ack	syn	&	6	F	V	f
7	\$7	bel	etb	'	7	G	W	g
8	\$8	bs	can	(8	H	X	h
9	\$9	ht	em)	9	I	Y	i
10	\$A	lf	sub	*	:	J	Z	j
11	\$B	vt	esc	+	;	K	[k
12	\$C	ff	fs	,	<	L	\	l
13	\$D	cr	gs	-	=	M]	m
14	\$E	so	rs	.	>	N	^	n
15	\$F	si	us	/	?	O	_	o
								rub

Groups of two and three lower case letters are abbreviations for standard ASCII control characters.

Not all the characters listed in this table can be generated by the keyboard. Specifically, the characters in the two rightmost columns (the lower case letters), the symbols [(left square bracket), \ (backslash), _ (underscore), and the control characters "fs", "us", and "rub", are not available on the Apple keyboard.

The decimal or hexadecimal value for any character in the above table is the sum of the decimal or hexadecimal numbers appearing at the top of the column and the left side of the row in which the character appears.

THE APPLE VIDEO DISPLAY

The Apple Video Display

Display type:	Memory mapped into system RAM
Display modes:	Text, Low-Resolution Graphics, High-Resolution Graphics
Text capacity:	960 characters (24 lines, 40 columns)
Character type:	5 × 7 dot matrix
Character set:	Upper case ASCII, 64 characters
Character modes:	Normal, Inverse, Flashing
Graphics capacity:	1,920 blocks (Low-Resolution) in a 40 by 48 array 53,760 dots (High-Resolution) in a 280 by 192 array
Number of colors:	16 (Low-Resolution Graphics) 6 (High-Resolution Graphics)

THE VIDEO CONNECTOR

In the right rear corner of the Apple II board, there is a metal connector marked "VIDEO". This connector allows you to attach a cable between the Apple and a closed-circuit video monitor. One end of the connecting cable should have a male RCA phono jack to plug into the Apple, and the other end should have a connector compatible with the particular device you are using. The signal that comes out of this connector on the Apple is similar to an Electronic Industries Association (EIA)-standard, National Television Standards Committee (NTSC)-compatible, positive composite color video signal. The level of this signal can be adjusted from zero to 1 volt peak by the small round potentiometer on the right edge of the board about three inches from the back of the board.

A non-adjustable, 2 volts peak version of the same video signal is available in two other places: on a single wire-wrap pin* on the left side of the board about two inches from the back of the board, and on one pin of a group of four similar pins also on the left edge near the back of the board. The other three pins in this group are connected to -5 volts, +12 volts, and ground. See page 97 for a full description of this auxiliary video connector.

* This pin is not present in Apple II systems with the Revision # board.

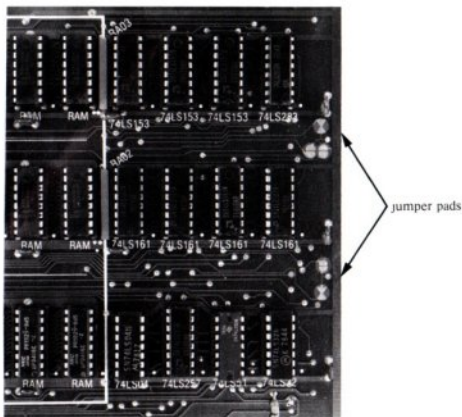


Photo 5. Eurapple (50 Hz) Jumper Pads.

- 1) **Text.** The Apple can display 24 lines of numbers, special symbols, and upper-case letters with 40 of these characters on each line. These characters are formed in a dot matrix 7 dots high and 5 dots wide. There is a one-dot wide space on either side of the character and a one-dot high space above each line.
- 2) **Low-Resolution Graphics.** The Apple can present 1,920 colored squares in an array 40 blocks wide and 48 blocks high. The color of each block can be selected from a set of sixteen different colors. There is no space between blocks, so that any two adjacent blocks of the same color look like a single, larger block.
- 3) **High-Resolution Graphics.** The Apple can also display colored dots on a matrix 280 dots wide and 192 dots high. The dots are the same size as the dots which make up the Text characters. There are six colors available in the High-Resolution Graphics mode: black, white, red, blue, green, and violet.* Each dot on the screen can be either black, white, or a color, although not all colors are available for every dot.

When the Apple is displaying a particular type of information on the screen, it is said to be in that particular "mode". Thus, if you see words and numbers on the screen, you can reasonably be assured that your Apple is in Text mode. Similarly, if you see a screen full of multicolored blocks, your computer is probably in Low-Resolution Graphics mode. You can also have a four-line "caption" of text at the bottom of either type of graphics screen. These four lines replace

* For Apples with Revision # boards, there are four colors: black, white, green, and violet.

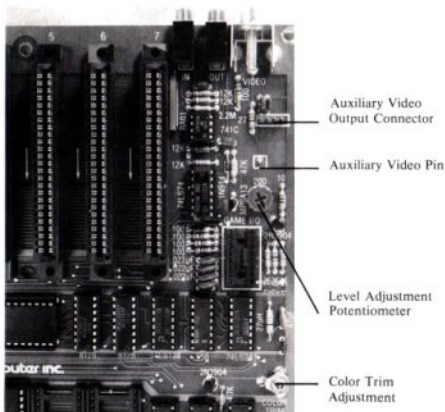


Photo 4. The Video Connectors and Potentiometer.

EURAPPLE (50 HZ) MODIFICATION

Your Apple can be modified to generate a video signal compatible with the CCIR standard used in many European countries. To make this modification, just cut the two X-shaped pads on the right edge of the board about nine inches from the back of the board, and solder together the three O-shaped pads in the same locations (see photo 5). You can then connect the video connector of your Apple to a European standard closed-circuit black-and-white or color video monitor. If you wish, you can obtain a "Eurocolor" encoder to convert the video signal into a PAL or SECAM standard color television signal suitable for use with any European television receiver. The encoder is a small printed circuit board which plugs into the rightmost peripheral slot (slot 7) in your Apple and connects to the single auxiliary video output pin.

WARNING: This modification will void the warranty on your Apple and requires the installation of a different main crystal. This modification is not for beginners.

SCREEN FORMAT

Three different kinds of information can be shown on the video display to which your Apple is connected:

the lower 8 rows of blocks in Low-Resolution Graphics, leaving a 40 by 40 array. In High-Resolution Graphics, they replace the bottom 32 rows of dots, leaving a 280 by 160 matrix. You can use these "mixed modes" to display text and graphics simultaneously, but there is no way to display both graphics modes at the same time.

SCREEN MEMORY

The video display uses information in the system's RAM memory to generate its display. The value of a single memory location controls the appearance of a certain, fixed object on the screen. This object can be a character, two stacked colored blocks, or a line of seven dots. In Text and Low-Resolution Graphics mode, an area of memory containing 1,024 locations is used as the source of the screen information. Text and Low-Resolution Graphics share this memory area. In High-Resolution Graphics mode, a separate, larger area (8,192 locations) is needed because of the greater amount of information which is being displayed. These areas of memory are usually called "pages". The area reserved for High-Resolution Graphics is sometimes called the "picture buffer" because it is commonly used to store a picture or drawing.

SCREEN PAGES

There are actually *two* areas from which each mode can draw its information. The first area is called the "primary page" or "Page 1". The second area is called the "secondary page" or "Page 2" and is an area of the same size immediately following the first area. The secondary page is useful for storing pictures or text which you want to be able to display instantly. A program can use the two pages to perform animation by drawing on one page while displaying the other and suddenly flipping pages.

Text and Low-Resolution Graphics share the same memory range for the secondary page, just as they share the same range for the primary page. Both mixed modes which were described above are also available on the secondary page, but there is no way to mix the two pages on the same screen.

Screen	Page	Begins at:		Ends at:	
		Hex	Decimal	Hex	Decimal
Text/Lo-Res	Primary	\$4000	1024	\$7FF	2047
	Secondary	\$8000	2048	\$BFF	3071
Hi-Res	Primary	\$20000	8192	\$3FFF	16383
	Secondary	\$40000	16384	\$5FFF	24575

SCREEN SWITCHES

The devices which decide between the various modes, pages, and mixes are called "soft switches". They are switches because they have two positions (for example: on or off, text or graphics) and they are called "soft" because they are controlled by the software of the computer.

A program can "throw" a switch by referencing the special memory location for that switch. The data which are read from or written to the location are irrelevant; it is the *reference to the address* of the location which throws the switch.

There are eight special memory locations which control the setting of the soft switches for the screen. They are set up in pairs; when you reference one location of the pair you turn its corresponding mode "on" and its companion mode "off". The pairs are:

Location:		Description:	
Hex	Decimal		
SC050	49232	-16304	Display a GRAPHICS mode.
SC051	49233	-16303	Display TEXT mode.
SC052	49234	-16302	Display all TEXT or GRAPHICS.
SC053	49235	-16301	Mix TEXT and a GRAPHICS mode.*
SC054	49236	-16300	Display the Primary page (Page 1).
SC055	49237	-16299	Display the Secondary page (Page 2).
SC056	49238	-16298	Display LO-RES GRAPHICS mode.*
SC057	49239	-16297	Display HI-RES GRAPHICS mode.*

There are ten distinct combinations of these switches:

Primary Page			Secondary Page		
Screen	Switches		Screen	Switches	
All Text	SC054	SC051	All Text	SC055	SC051
All Lo-Res Graphics	SC054	SC056	All Lo-Res Graphics	SC055	SC056
All Hi-Res Graphics	SC054	SC057	All Hi-Res Graphics	SC055	SC057
Mixed Text and Lo-Res	SC054	SC056	Mixed Text and Lo-Res	SC055	SC056
Mixed Text and Hi-Res	SC054	SC057	Mixed Text and Hi-Res	SC055	SC057
	SC053	SC050		SC053	SC050

(Those of you who are learned in the ways of binary will immediately cry out, "Where's the other six?!", knowing full well that with 4 two-way switches there are indeed *sixteen* possible combinations. The answer to the mystery of the six missing modes lies in the TEXT/GRAPHICS switch. When the computer is in Text mode, it can also be in one of six combinations of the Lo-Res/Hi-Res graphics mode, "mix" mode, or page selection. But since the Apple is displaying text, these different graphics modes are invisible.)

To set the Apple into one of these modes, a program needs only to refer to the addresses of the memory locations which correspond to the switches that set that mode. Machine language programs should use the hexadecimal addresses given above; BASIC programs should PEEK or POKE their decimal equivalents (given in Table 5, "Screen Soft Switches", above). The switches may be thrown in any order; however, when switching into one of the Graphics modes, it is helpful to throw the TEXT/GRAPHICS switch last. All the other changes in mode will then take place invisibly behind the text, so that when the Graphics mode is set, the finished graphics

* These modes are only visible if the "Display GRAPHICS" switch is "on".

screen appears all at once.

THE TEXT MODE

In the Text mode, the Apple can display 24 lines of characters with up to 40 characters on each line. Each character on the screen represents the contents of one memory location from the memory range of the page being displayed. The character set includes the 26 upper-case letters, the 10 digits, and 28 special characters for a total of 64 characters. The characters are formed in a dot matrix 5 dots wide and 7 dots high. There is a one-dot wide space on both sides of each character to separate adjacent characters and a one-dot high space above each line of characters to separate adjacent lines. The characters are normally formed with white dots on a dark background; however, each character on the screen can also be displayed using dark dots on a white background or alternating between the two to produce a flashing character. When the Video Display is in Text mode, the video circuitry in the Apple turns off the color burst signal to the television monitor, giving you a clearer black-and-white display.*

The area of memory which is used for the primary text page starts at location number 1024 and extends to location number 2047. The secondary screen begins at location number 2048 and extends up to location 3071. In machine language, the primary page is from hexadecimal address \$400 to address \$7FF; the secondary page is from \$800 to \$BFF. Each of these pages is 1,024 bytes long. Those of you intrepid enough to do the multiplication will realize that there are only 960 characters displayed on the screen. The remaining 64 bytes in each page which are not displayed on the screen are used as temporary storage locations by programs stored in PROM on Apple Intelligent Interface® peripheral boards (see page 82).

Photo 6 shows the sixty-four characters available on the Apple's screen.



Photo 6. The Apple Character Set.

Table 7 gives the decimal and hexadecimal codes for the 64 characters in normal, inverse, and flashing display modes.

* This feature is not present on the Revision 0 board.

Table 7: ASCII Screen Characters

		Inverse				Flashing				(Control)				Normal				(Lowercase)			
Decimal	Hex	00	16	32	48	64	80	96	112	128	144	160	176	192	208	224	240	256	272	288	
		500	510	520	530	540	550	560	570	580	590	5A0	5B0	5C0	5D0	5E0	5F0				
050		@	P		0	@	P		0	@	P		0	@	P		0				
151		A	Q	!	1	A	Q	!	1	A	Q	!	1	A	Q	!	1				
252		B	R	"	2	B	R	"	2	B	R	"	2	B	R	"	2				
353		C	S	#	3	C	S	#	3	C	S	#	3	C	S	#	3				
454		D	T	\$	4	D	T	\$	4	D	T	\$	4	D	T	\$	4				
555		E	U	%	5	E	U	%	5	E	U	%	5	E	U	%	5				
656		F	V	&	6	F	V	&	6	F	V	&	6	F	V	&	6				
757		G	W	'	7	G	W	'	7	G	W	'	7	G	W	'	7				
858		H	X	(8	H	X	(8	H	X	(8	H	X	(8				
959		I	Y)	9	I	Y)	9	I	Y)	9	I	Y)	9				
105A		J	Z	*	:	J	Z	*	:	J	Z	*	:	J	Z	*	:				
115B		K	I	+	;	K	I	+	;	K	I	+	;	K	I	+	;				
125C		L	\	,	<	L	\	,	<	L	\	,	<	L	\	,	<				
135D		M]	-	=	M]	-	=	M]	-	=	M]	-	=				
145E		N	^	_	>	N	^	_	>	N	^	_	>	N	^	_	>				
155F		O	~	/	?	O	~	/	?	O	~	/	?	O	~	/	?				

Table 7. ASCII Screen Character Set

	\$00	
	\$01	
	\$02	
	\$03	
	\$04	
	\$05	
	\$06	
	\$07	
	\$08	
	\$09	
	\$0A	
	\$0B	
	\$0C	
	\$0D	
	\$0E	
	\$0F	
	\$10	
	\$11	
	\$12	
	\$13	
	\$14	
	\$15	
	\$16	
	\$17	
	\$18	
	\$19	
	\$1A	
	\$1B	
	\$1C	
	\$1D	
	\$1E	
	\$1F	
	\$20	
	\$21	
	\$22	
	\$23	
	\$24	
	\$25	
	\$26	
	\$27	
\$400	1024	
\$480	1152	
\$500	1280	
\$580	1408	
\$600	1536	
\$680	1664	
\$700	1792	
\$780	1920	
\$428	1064	
\$4A8	1192	
\$528	1320	
\$5A8	1448	
\$628	1576	
\$6A8	1704	
\$728	1832	
\$7A8	1960	
\$450	1104	
\$4D0	1232	
\$550	1360	
\$5D0	1488	
\$650	1616	
\$6D0	1744	
\$750	1872	
\$7D0	2000	

Figure 1. Map of the Text Screen

Figure 1 is a map of the Apple's display in Text mode, with the memory location addresses for each character position on the screen.

THE LOW-RESOLUTION GRAPHICS (LO-RES) MODE

In the Low-Resolution Graphics mode, the Apple presents the contents of the same 1,024 locations of memory as is in the Text mode, but in a different format. In this mode, each byte of memory is displayed not as an ASCII character, but as two colored blocks, stacked one atop the other. The screen can show an array of blocks 40 wide and 48 high. Each block can be any of sixteen colors. On a black-and-white television set, the colors appear as patterns of grey and white dots.

Since each byte in the page of memory for Low-Resolution Graphics represents two blocks on the screen, stacked vertically, each byte is divided into two equal sections, called (appropriately enough) "nybbles". Each nybble can hold a value from zero to 15. The value which is in the lower nybble of the byte determines the color for the upper block of that byte on the screen, and the value which is in the upper nybble determines the color for the lower block on the screen. The colors are numbered zero to 15, thus:

Decimal	Hex	Color	Decimal	Hex	Color
0	S0	Black	8	S8	Brown
1	S1	Magenta	9	S9	Orange
2	S2	Dark Blue	10	SA	Grey 2
3	S3	Purple	11	SB	Pink
4	S4	Dark Green	12	SC	Light Green
5	S5	Grey 1	13	SD	Yellow
6	S6	Medium Blue	14	SE	Aquamarine
7	S7	Light Blue	15	SF	White

(Colors may vary from television to television, particularly on those without hue controls. You can adjust the tint of the colors by adjusting the COLOR TRIM control on the right edge of the Apple board.)

So, a byte containing the hexadecimal value SD8 would appear on the screen as a brown block on top of a yellow block. Using decimal arithmetic, the color of the lower block is determined by the quotient of the value of the byte divided by 16; the color of the upper block is determined by the remainder.

Figure 2 is a map of the Apple's display in Low-Resolution Graphics mode, with the memory location addresses for each block on the screen.

Since the Low-Resolution Graphics screen displays the same area in memory as is used for the Text screen, interesting things happen if you switch between the Text and Low-Resolution Graphics modes. For example, if the screen is in the Low-Resolution Graphics mode and is full of colored blocks, and then the TEXT/GRAPHICS screen switch is thrown to the Text mode, the screen will be filled with seemingly random text characters, sometimes inverse or flashing. Similarly, a screen full of text when viewed in Low-Resolution Graphics mode appears as long horizontal grey, pink, green or yellow bars separated by randomly colored blocks.

\$400	1024	#	S00
\$480	1152	1	S01
\$500	1280	2	S02
\$580	1408	3	S03
\$600	1536	4	S04
\$680	1664	5	S05
\$700	1792	6	S06
\$780	1920	7	S07
\$428	1064	8	S08
\$4A8	1192	9	S09
\$528	1320	10	S0A
\$5A8	1448	11	S0B
\$628	1576	12	S0C
\$6A8	1704	13	S0D
\$728	1832	14	S0E
\$7A8	1960	15	S0F
\$450	1104	16	S10
\$4D0	1232	17	S11
\$550	1360	18	S12
\$5D0	1488	19	S13
\$650	1616	20	S14
\$6D0	1744	21	S15
\$750	1872	22	S16
\$7D0	2000	23	S17
		24	S18
		25	S19
		26	S1A
		27	S1B
		28	S1C
		29	S1D
		30	S1E
		31	S1F
		32	S20
		33	S21
		34	S22
		35	S23
		36	S24
		37	S25
		38	S26
		39	S27

Figure 2. Map of the Low-Resolution Graphics Mode

THE HIGH-RESOLUTION GRAPHICS (HI-RES) MODE

The Apple has a second type of graphic display, called High-Resolution Graphics (or sometimes "Hi-res"). When your Apple is in the High-Resolution Graphics mode, it can display 53,760 dots in a matrix 280 dots wide and 192 dots high. The screen can display black, white, violet, green, red, and blue dots, although there are some limitations concerning the color of individual dots.

The High-Resolution Graphics mode takes its data from an 8,192-byte area of memory, usually called a "picture buffer". There are two separate picture buffers: one for the primary page and one for the secondary page. Both of these buffers are independent of and separate from the memory areas used for Text and Low-Resolution Graphics. The primary page picture buffer for the High-Resolution Graphics mode begins at memory location number 8192 and extends up to location number 16383; the secondary page picture buffer follows on the heels of the first at memory location number 16384, extending up to location number 24575. For those of you with sixteen fingers, the primary page resides from \$2000 to \$3FFF and the secondary page follows in succession at \$4000 to \$5FFF. If your Apple is equipped with 16K (16,384 bytes) or less of memory, then the secondary page is inaccessible to you; if its memory size is less than 16K, then the entire High-Resolution Graphics mode is unavailable to you.

Each dot on the screen represents one bit from the picture buffer. Seven of the eight bits in each byte are displayed on the screen, with the remaining bit used to select the colors of the dots in that byte. Forty bytes are displayed on each line of the screen. The least significant bit (first bit) of the first byte in the line is displayed on the left edge of the screen, followed by the second bit, then the third, etc. The most significant (eighth) bit is not displayed. Then follows the first bit of the next byte, and so on. A total of 280 dots are displayed on each of the 192 lines of the screen.

On a black-and-white monitor or TV set, the dots whose corresponding bits are "on" (or equal to 1) appear white; the dots whose corresponding bits are "off" or (equal to 0) appear black. On a color monitor or TV, it is not so simple. If a bit is "off", its corresponding dot will always be black. If a bit is "on", however, its color will depend upon the *position* of that dot on the screen. If the dot is in the leftmost column on the screen, called "column 0", or in any even-numbered column, then it will appear violet. If the dot is in the rightmost column (column 279) or any odd-numbered column, then it will appear green. If two dots are placed side-by-side, they will both appear white. If the undisplayed bit of a byte is turned on, then the colors blue and red are substituted for violet and green, respectively.* Thus, there are six colors available in the High-Resolution Graphics mode, subject to the following limitations:

- 1) Dots in even columns must be black, violet, or blue.
- 2) Dots in odd columns must be black, green, or red.
- 3) Each byte must be either a violet/green byte or a blue/red byte. It is not possible to mix green and blue, green and red, violet and blue, or violet and red in the same byte.

* On Revision 0 Apple boards, the colors red and blue are unavailable and the setting of the eighth bit is irrelevant.

- 4) Two colored dots side by side always appear white, even if they are in different bytes.
- 5) On European-modified Apples, these rules apply but the colors generated in the High-Resolution Graphics mode may differ.

Figure 3 shows the Apple's display screen in High-Resolution Graphics mode with the memory addresses of each line on the screen.

OTHER INPUT/OUTPUT FEATURES

Apple Input/Output Features	
Inputs:	Cassette Input Three One-bit Digital Inputs Four Analog Inputs
Outputs:	Cassette Output Built-In Speaker Four "Annunciator" Outputs Utility Strobe Output

THE SPEAKER

Inside the Apple's case, on the left side under the keyboard, is a small 8 ohm speaker. It is connected to the internal electronics of the Apple so that a program can cause it to make various sounds.

The speaker is controlled by a soft switch. The switch can put the paper cone of the speaker in two positions: "in" and "out". This soft switch is not like the soft switches controlling the various video modes, but is instead a *toggle* switch. Each time a program references the memory address associated with the speaker switch, the speaker will change state: change from "in" to "out" or vice-versa. Each time the state is changed, the speaker produces a tiny "click". By referencing the address of the speaker switch frequently and continuously, a program can generate a steady tone from the speaker.

The soft switch for the speaker is associated with memory location number 49200. Any reference to this address (or the equivalent addresses -16336 or hexadecimal SC030) will cause the speaker to emit a click.

A program can "reference" the address of the special location for the speaker by performing a "read" or "write" operation to that address. The data which are read or written are irrelevant, as it is the *address* which throws the switch. Note that a "write" operation on the Apple's 6502 microprocessor actually performs a "read" before the "write", so that if you use a "write" operation to flip any soft switch, you will actually throw that switch *twice*. For toggle-type soft switches, such as the speaker switch, this means that a "write" operation to the special location

controlling the switch will leave the switch in the same state it was in before the operation was performed.

THE CASSETTE INTERFACE

On the back edge of the Apple's main board, on the right side next to the VIDEO connector, are two small black packages labelled "IN" and "OUT". These are miniature phone jacks into which you can plug a cable which has a pair of miniature phono plugs on each end. The other end of this cable can be connected to a standard cassette tape recorder so that your Apple can save information on audio cassette tape and read it back again.

The connector marked "OUT" is wired to yet another soft switch on the Apple board. This is another toggle switch, like the speaker switch (see above). The soft switch for the cassette output plug can be toggled by referencing memory location number 49184 (or the equivalent -16352 or hexadecimal SC020). Referencing this location will make the voltage on the OUT connector swing from zero to 25 millivolts (one fortieth of a volt), or return from 25 millivolts back to zero. If the other end of the cable is plugged into the MICROPHONE input of a cassette tape recorder which is recording onto a tape, this will produce a tiny "click" on the recording. By referencing the memory location associated with the cassette output soft switch repeatedly and frequently, a program can produce a tone on the recording. By varying the pitch and duration of this tone, information may be encoded on a tape and saved for later use. Such a program to encode data on a tape is included in the System Monitor and is described on page 46.

Be forewarned that if you attempt to flip the soft switch for the cassette output by writing to its special location, you will actually generate *two* "clicks" on the recording. The reason for this is mentioned in the description of the speaker (above). You should only use "read" operations when toggling the cassette output soft switch.

The other connector, marked "IN", can be used to "listen" to a cassette tape recording. Its main purpose is to provide a means of listening to tones on the tape, decoding them into data, and storing them in memory. Thus, a program or data set which was stored on cassette tape may be read back in and used again.

The input circuit takes a 1 volt (peak-to-peak) signal from the cassette recorder's EARPHONE jack and converts it into a string of ones and zeroes. Each time the signal applied to the input circuit swings from positive to negative, or vice-versa, the input circuit changes state: if it was sending ones, it will start sending zeroes, and vice versa. A program can inspect the state of the cassette input circuit by looking at memory location number 49248 or the equivalents -16288 or hexadecimal SC060. If the value which is read from this location is greater than or equal to 128, then the state is a "one"; if the value in the memory location is less than 128, then the state is a "zero". Although BASIC programs can read the state of the cassette input circuit, the speed of a BASIC program is usually much too slow to be able to make any sense out of what it reads. There is, however, a program in the System Monitor which will read the tones on a cassette tape and decode them. This is described on page 47.

THE GAME I/O CONNECTOR

The purpose of the Game I/O connector is to allow you to connect special input and output devices to heighten the effect of programs in general, and specifically, game programs. This connector allows you to connect three one-bit inputs, four one-bit outputs, a data strobe, and four analog inputs to the Apple, all of which can be controlled by your programs. Supplied with your Apple is a pair of Game Controllers which are connected to cables which plug into the Game I/O connector. The two rotary dials on the Controllers are connected to two analog inputs on the Connector; the two pushbuttons are connected to two of the one-bit inputs.




Photo 7. The Game I/O Connector.

ANNUNCIATOR OUTPUTS

The four one-bit outputs are called "annunciators". Each annunciator output can be used as an input to some other electronic device, or the annunciator outputs can be connected to circuits to drive lamps, relays, speakers, etc.

Each annunciator is controlled by a soft switch. The addresses of the soft switches for the annunciators are arranged into four pairs, one pair for each annunciator. If you reference the first address in a pair, you turn the output of its corresponding annunciator "off"; if you reference the second address in the pair, you turn the annunciator's output "on". When an annunciator is

“off”, the voltage on its pin on the Game I/O Connector is near 0 volts; when an annunciator is “on”, the voltage is near 5 volts. There are no inherent means to determine the current setting of an annunciator bit. The annunciator soft switches are:

Table 9: Annunciator Special Locations				
Ann.	State	Address:		
		Decimal		Hex
0	off	49240	-16296	SC058
	on	49241	-16295	SC059
1	off	49242	-16294	SC05A
	on	49243	-16293	SC05B
2	off	49244	-16292	SC05C
	on	49245	-16291	SC05D
3	off	49246	-16290	SC05E
	on	49247	-16289	SC05F

ONE-BIT INPUTS

The three one-bit inputs can each be connected to either another electronic device or to a push-button. You can read the state of any of the one-bit inputs from a machine language or BASIC program in the same manner as you read the Cassette Input, above. The locations for the three one-bit inputs have the addresses 49249 through 49251 (-16287 through -16285 or hexadecimal SC061 through SC063).

ANALOG INPUTS

The four analog inputs can be connected to 150K Ohm variable resistors or potentiometers. The variable resistance between each input and the +5 volt supply is used in a one-shot timing circuit. As the resistance on an input varies, the timing characteristics of its corresponding timing circuit change accordingly. Machine language programs can sense the changes in the timing loops and obtain a numerical value corresponding to the position of the potentiometer.

Before a program can start to read the setting of a potentiometer, it must first reset the timing circuits. Location number 49264 (-16272 or hexadecimal SC070) does just this. When you reset the timing circuits, the values contained in the four locations 49252 through 49255 (-16284 through -16281 or SC064 through SC067) become greater than 128 (their high bits are set). Within 3.060 milliseconds, the values contained in these four locations should drop below 128. The exact time it takes for each location to drop in value is directly proportional to the setting of the game paddle associated with that location. If the potentiometers connected to the analog inputs have a greater resistance than 150K Ohms, or there are no potentiometers connected, then the values in the game controller locations may never drop to zero.

STROBE OUTPUT

There is an additional output, called **C040 STROBE**, which is normally +5 volts but will drop to zero volts for a duration of one-half microsecond under the control of a machine language or BASIC program. You can trigger this "strobe" by referring to location number 49216 (-16320 or SC04F). Be aware that if you perform a "write" operation to this location, you will trigger the strobe *twice* (see a description of this phenomenon in the section on the Speaker).

Function:	Address:		Read/Write	
	Decimal	Hex		
Speaker	49200	-16336 SC030	R	
Cassette Out	49184	-16352 SC020	R	
Cassette In	49256	-16288 SC060	R	
Annunciators*	49240 through 49247	-16296 through -16289	SC058 through SC05F	R/W
Flag inputs	49249	-16287 SC061	R	
	49250	-16286 SC062	R	
	49251	-16285 SC063	R	
Analog Inputs	49252	-16284 SC064	R	
	49253	-16283 SC065		
	49254	-16282 SC066		
	49255	-16281 SC067		
Analog Clear	49264	-16272 SC070	R/W	
Utility Strobe	49216	-16320 SC040	R	

VARIETIES OF APPLES

There are a few variations on the basic Apple II computer. Some of the variations are revisions or modifications of the computer itself; others are changes to its operating software. These are the basic variations:

AUTOSTART ROM / MONITOR ROM

All Apple II Plus Systems include the Autostart Monitor ROM. All other Apple systems do not contain the Autostart ROM, but instead have the Apple System Monitor ROM. This version of the ROM lacks some of the features present in the Autostart ROM, but also has some features which are not present in that ROM. The main differences in the two ROMs are listed on the following pages.

* See the previous table.

- **Editing Controls.** The ESC-I, J, K, and M sequences, which move the cursor up, left, right, and down, respectively, are not available in the Old Monitor ROM.
- **Stop-List.** The Stop-List feature (invoked by a **CTRLS**), which allows you to introduce a pause into the output of most BASIC or machine language programs or listings, is not available in the Old Monitor ROM.
- **The RESET cycle.** When you first turn on your Apple or press **RESET**, the Old Monitor ROM will send you directly into the Apple System Monitor, instead of initiating a warm or cold start as described in "The RESET Cycle" on page 36.

The Old Monitor ROM does, however, support the STEP and TRACE debugging features of the System Monitor, described on page 51. The Autostart ROM does not recognize these Monitor commands.

REVISION 0 / REVISION 1 BOARD

The Revision 0 Apple II board lacks a few features found on the current Revision 1 version of the Apple II main board. To determine which version of the main board is in your Apple, open the case and look at the upper right-hand corner of the board. Compare what you see to Photo 4 on page 10. If your Apple does not have the single metal video connector pin between the four-pin video connector and the video adjustment potentiometer, then you have a Revision 0 Apple.

The differences between the Revision 0 and Revision 1 Apples are summarized below.

- **Color Killer.** When the Apple's Video Display is in Text mode, the Revision 0 Apple board leaves the color burst signal active on the video output circuit. This causes text characters to appear tinted or with colored fringes.
- **Power-on RESET.** Revision 0 Apple boards have no circuit to automatically initiate a RESET cycle when you turn the power on. Instead, you must press **RESET** once to start using your Apple.

Also, when you turn on the power to an Apple with a Revision 0 board, the keyboard will become active, as if you had typed a random character. When the Apple starts looking for input, it will accept this random character as if you had typed it. In order to erase this character, you should press **CTRL X** after you **RESET** your Apple when you turn on its power.

- **Colors in High-Resolution Graphics.** Apples with Revision 0 boards can generate only four colors in the High-Resolution Graphics mode: black, white, violet, and green. The high bit of each byte displayed on the Hi-Res screen (see page 19) is ignored.
- **24K Memory Map problem.** Systems with a Revision 0 Apple II board which contain 20K or 24K bytes of RAM memory appear to BASIC to have more memory than they actually do. See "Memory Organization", page 72, for a description of this problem.
- **50 Hz Apples.** The Revision 0 Apple II board does not have the pads and jumpers which you can cut and solder to convert the VIDEO OUT signal of your Apple to conform to the European PAL/SECAM television standard. It also lacks the third VIDEO connector, the single metal pin in front of the four-pin video connector.

- **Speaker and Cassette Interference.** On Apples with Revision 0 boards, any sound generated by the internal speaker will also appear as a signal on the Cassette Interface's OUT connector. If you leave the tape recorder in RECORD mode, then any sound generated by the internal speaker will also appear on the tape recording.
- **Cassette Input.** The input circuit for the Cassette Interface has been modified so that it will respond with more accuracy to a weaker input signal.

POWER SUPPLY CHANGES

In addition, some Apples have a version of the Apple Power Supply which will accept only a 110 volt power line input. These are not equipped with the voltage selector switch on the back of the supply.

THE APPLE II PLUS

The **Apple II Plus** is a standard Apple II computer with a Revision 1 board, an Autostart Monitor ROM, and the Applesoft II BASIC language in ROM in lieu of Apple Integer BASIC. European models of the Apple II Plus are equipped with a 110/220 volt power supply. The Apple Mini-Assembler, the Floating-Point Package, and the SWEET-16 interpreter, stored in the Integer BASIC ROMs, are not available on the Apple II Plus.



CHAPTER 2

CONVERSATION WITH APPLES

- 30 STANDARD OUTPUT
- 30 THE STOP-LIST FEATURE
- 31 BUT SOFT, WHAT LIGHT THROUGH YONDER WINDOW BREAKS!
(OR, THE TEXT WINDOW)
- 32 SEEING IT ALL IN BLACK AND WHITE
- 32 STANDARD INPUT
- 32 RDKEY
- 33 GETLN
- 34 ESCAPE CODES
- 36 THE RESET CYCLE
- 36 AUTOSTART ROM RESET
- 37 AUTOSTART ROM SPECIAL LOCATIONS
- 38 "OLD MONITOR" ROM RESET

Almost every program and language on the Apple needs some sort of input from the keyboard, and some way to print information on the screen. There is a set of subroutines stored in the Apple's ROM memory which handle most of the standard input and output from all programs and languages on the Apple.

The subroutines in the Apple's ROM which perform these input and output functions are called by various names. These names were given to the subroutines by their authors when they were written. The Apple itself does not recognize or remember the names of its own machine language subroutines, but it's convenient for us to call these subroutines by their given names.

STANDARD OUTPUT

The standard output subroutine is called COUT. COUT will display upper-case letters, numbers, and symbols on the screen in either Normal or Inverse mode. It will ignore control characters except RETURN, the bell character, the line feed character, and the backspace character.

The COUT subroutine maintains its own invisible "output cursor"* (the position at which the next character is to be placed). Each time COUT is called, it places one character on the screen at the current cursor position, replacing whatever character was there, and moves the cursor one space to the right. If the cursor is bumped off the right edge of the screen, then COUT shifts the cursor down to the first position on the next line. If the cursor passes the bottom line of the screen, the screen "scrolls" up one line and the cursor is set to the first position on the newly blank bottom line.

When a RETURN character is sent to COUT, it moves the cursor to the first position of the next line. If the cursor falls off the bottom of the screen, the screen scrolls as described above.

THE STOP-LIST FEATURE

When any program or language sends a RETURN code to COUT, COUT will take a quick peek at the keyboard. If you have typed a **CTRL S** since the last time COUT looked at the keyboard, then it will stop and wait for you to press another key. This is called the *Stop-List* feature.** When you press another key, COUT will then output the RETURN code and proceed with normal output. The code of the key which you press to end the Stop-List mode is ignored unless it is a **CTRL C**. If it is, then COUT passes this character code back to the program or language which is sending output. This allows you to terminate a BASIC program or listing by typing **CTRL C** while you are in Stop-List mode.

A line feed character causes COUT to move its mythical output cursor down one line without any horizontal motion at all. As always, moving beyond the bottom of the screen causes the screen to scroll and the cursor remains at its same position on a fresh bottom line.

A backspace character moves the imaginary cursor one space to the left. If the cursor is bumped off the left edge, it is reset to the rightmost position on the previous line. If there is no previous line (if the cursor was at the top of the screen), the screen does *not* scroll downwards, but instead

* From latin *cursor*, "runner"

** The Stop-list feature is not present on Apples without the Autostart ROM.

the cursor is placed again at the rightmost position on the top line of the screen.

When COUT is sent a "bell" character (CTRL G), it does not change the screen at all, but instead produces a tone from the speaker. The tone has a frequency of 100Hz and lasts for 1/10th of a second. The output cursor does not move for a bell character.

BUT SOFT, WHAT LIGHT THROUGH YONDER WINDOW BREAKS!

(OR, THE TEXT WINDOW)

In the above discussions of the various motions of the output cursor, the words "right", "left", "top", and "bottom" mean the physical right, left, top, and bottom of the standard 40-character wide by 24-line tall screen. There is, however, a way to tell the COUT subroutine that you want it to use only a section of the screen, and not the entire 960-character display. This segregated section of the text screen is called a "window". A program or language can set the positions of the top, bottom, left side, and width of the text window by storing those positions in four locations in memory. When this is done, the COUT subroutine will use the new positions to calculate the size of the screen. It will never print any text outside of this window, and when it must scroll the screen, it will only scroll the text within the window. This gives programs the power to control the placement of text, and to protect areas of the screen from being overwritten with new text.

Location number 32 (hexadecimal \$20) in memory holds the column position of the leftmost column in the window. This position is normally position 0 for the extreme left side of the screen. This number should never exceed 39 (hexadecimal \$27), the leftmost column on the text screen. Location number 33 (hexadecimal \$21) holds the width, in columns, of the cursor window. This number is normally 40 (hexadecimal \$28) for a full 40-character screen. Be careful that the sum of the window width and the leftmost window position does not exceed 40! If it does, it is possible for COUT to place characters in memory locations not on the screen, endangering your programs and data.

Location 34 (hexadecimal \$22) contains the number of the top line of the text window. This is also normally 0, indicating the topmost line of the display. Location 35 (hexadecimal \$23) holds the number of the bottom line of the screen (plus one), thus normally 24 (hexadecimal \$18) for the bottommost line of the screen. When you change the text window, you should take care that you know the whereabouts of the output cursor, and that it will be inside the new window.

Table 11: Text Window Special Locations

Function:	Location:		Minimum/Normal/Maximum Value	
	Decimal	Hex	Decimal	Hex
Left Edge	32	\$20	0/0/39	\$0/\$0/\$17
Width	33	\$21	0/40/40	\$0/\$28/\$28
Top Edge	34	\$22	0/0/24	\$0/\$0/\$18
Bottom Edge	35	\$23	0/24/24	\$0/\$18/\$18

SEEING IT ALL IN BLACK AND WHITE

The COUT subroutine has the power to print what's sent to it in either Normal or Inverse text modes (see page 14). The particular form of its output is determined by the contents of location number 50 (hexadecimal \$32). If this location contains the value 255 (hexadecimal \$FF), then COUT will print characters in Normal mode; if the value is 63 (hexadecimal \$3F), then COUT will present its display in Inverse mode. Note that this mode change only affects the characters printed after the change has been made. Other values, when stored in location 50, do unusual things: the value 127 prints letters in Flashing mode, but all other characters in Inverse; any other value in location 50 will cause COUT to ignore some or all of its normal character set.

Value:		Effect:
Decimal	Hex	
255	\$FF	COUT will display characters in Normal mode.
63	\$3F	COUT will display characters in Inverse mode.
127	\$7F	COUT will display letters in Flashing mode, all other characters in Inverse mode.

The Normal/Inverse "mask" location, as it is called, works by performing a logical "AND" between the bits contained in location 50 and the bits in each outgoing character code. Every bit in location 50 which is a logical "zero" will force the corresponding bit in the character code to become "zero" also, regardless of its former setting. Thus, when location 50 contains 63 (hexadecimal \$3F or binary 00111111), the top two bits of every output character code will be turned "off". This will place characters on the screen whose codes are all between 0 and 63. As you can see from the ASCII Screen Character Code table (Table 7 on page 15), all of these characters are in Inverse mode.

STANDARD INPUT

There are actually two subroutines which are concerned with the gathering of standard input: RDKEY, which fetches a single keystroke from the keyboard, and GETLN, which accumulates a number of keystrokes into a chunk of information called an *input line*.

RDKEY

The primary function of the RDKEY subroutine is to wait for the user to press a key on the keyboard, and then report back to the program which called it with the code for the key which was pressed. But while it does this, RDKEY also performs two other helpful tasks:

- 1). *Input Prompting.* When RDKEY is activated, the first thing it does is make visible the hidden output cursor. This accomplishes two things: it reminds the user that the Apple is waiting for a key to be pressed, and it also associates the input it wants with a particular place on the screen. In most cases, the input prompt appears near a word or phrase describing what is being requested by the particular program or language currently in use. The input cursor itself is a flashing representation of whatever character was at the position of the output cursor. Usually this is the blank character, so the input cursor most often appears to be a flashing square.

When the user presses a key, RDKEY dutifully removes the input cursor and returns the value of the key which was pressed to the program which requested it. Remember that the output cursor is just a position on the screen, but the input cursor is a flashing character on the screen. They usually move in tandem and are rarely separated from each other, but when the input cursor disappears, the output cursor is still active.

- 2). *Random Number Seeding.* While it waits for the user to press a key, RDKEY is continually adding 1 to a pair of numbers in memory. When a key is finally pressed, these two locations together represent a number from 0 to 65,535, the exact value of which is quite unpredictable. Many programs and languages use this number as the base of a random number generator. The two locations which are randomized during RDKEY are numbers 78 and 79 (hexadecimal \$4E and \$4F).

GETLN

The vast majority of input to the Apple is gathered into chunks called *input lines*. The subroutine in the Apple's ROM called GETLN requests an input line from the keyboard, and after getting one, returns to the program which called it. GETLN has many features and nuances, and it is good to be familiar with the services it offers.

When called, GETLN first prints a *prompting character*, or "prompt". The prompt helps you to identify which program has called GETLN requesting input. A prompt character of an asterisk (*) represents the System Monitor, a right caret (>) indicates Apple Integer BASIC, a right bracket (]) is the prompt for Applesoft II BASIC, and an exclamation point (!) is the hallmark of the Apple Mini-Assembler. In addition, the question-mark prompt (?) is used by many programs and languages to indicate that a user program is requesting input. From your (the user's) point of view, the Apple simply prints a prompt and displays an input cursor. As you type, the characters you type are printed on the screen and the cursor moves accordingly. When you press **RETURN**, the entire line is sent off to the program or language you are talking to, and you get another prompt.

Actually, what really happens is that after the prompt is printed, GETLN calls RDKEY, which displays an input cursor. When RDKEY returns with a keycode, GETLN stores that keycode in an *input buffer* and prints it on the screen where the input cursor was. It then calls RDKEY again. This continues until the user presses **RETURN**. When GETLN receives a RETURN code from the keyboard, it sticks the RETURN code at the end of the input buffer, clears the remainder of the screen line the input cursor was on, and sends the RETURN code to COUT (see above). GETLN then returns to the program which called it. The program or language which requested input may now look at the entire line, all at once, as saved in the input buffer.

At any time while you are typing a line, you can type a **CTRL X** and cancel that entire line. GETLN will simply forget everything you have typed, print a backslash (\), skip to a new line, and display another prompt, allowing you to retype the line. Also, GETLN can handle a maximum of 255 characters in a line. If you exceed this limit, GETLN will cancel the entire line and you must start over. To warn you that you are approaching the limit, GETLN will sound a tone every keypress starting with the 249th character.

GETLN also allows you to edit and modify the line you are typing in order to correct simple typographical errors. A quick introduction to the standard editing functions and the use of the two arrow keys, **←** and **→**, appears on pages 28-29 and 53-55 of the **Apple II BASIC Programming Manual**, or on pages 27-28, 52-53 and Appendix C of **The Applesoft Tutorial**, at least one

of which you should have received. Here is a short description of GETLN's editing features:

THE BACKSPACE (←) KEY

Each press of the backspace key makes GETLN "forget" one previous character in the input line. It also sends a backspace character to COUT (see above), making the cursor move back to the character which was deleted. At this point, a character typed on the keyboard will replace the deleted character both on the screen and in the input line. Multiple backspaces will delete successive characters; however, if you backspace over more characters than you have typed, GETLN will forget the entire line and issue another prompt.

THE RETYPE (↵) KEY

Pressing the retype key has exactly the same effect as typing the character which is under the cursor. This is extremely useful for re-entering the remainder of a line which you have backspaced over to correct a typographical error. In conjunction with *pure cursor moves* (which follow), it is also useful for recopying and editing data which is already on the screen.

ESCAPE CODES

When you press the key marked **ESC** on the keyboard, the Apple's input subroutines go into *escape mode*. In this mode, eleven keys have separate meanings, called "escape codes". When you press one of these eleven keys, the Apple will perform the function associated with that key. After it has performed the function, the Apple will either continue or terminate escape mode, depending upon which escape code was performed. If you press any key in escape mode which is not an escape code, then that keypress will be ignored and escape mode will be terminated.

The Apple recognizes eleven escape codes, eight of which are *pure cursor moves*, which simply move the cursor without altering the screen or the input line, and three of which are *screen clear codes*, which simply blank part or all of the screen. All of the screen clear codes and the first four pure cursor moves (escape codes @, A, B, C, D, E, and F) terminate the escape mode after operating. The final four escape codes (I, K, M, and J) complete their functions with escape mode active.*

ESC A A press of the **ESC** key followed by a press of the **A** key will move the cursor one space to the right without changing the input line. This is useful for skipping over unwanted characters in an input line: simply backspace back over the unwanted characters, press **ESC A** to skip each offending symbol, and use the retype key to re-enter the remainder of the line.

ESC B Pressing **ESC** followed by **B** moves the cursor back one space, also without disturbing the input line. This may be used to enter something twice on the same line without retyping it: just type it once, press **ESC B** repeatedly to get back to the beginning of the phrase, and use the retype key to enter it again.

* These four escape codes are not available on Apples without the Autostart Monitor ROM.

ESC C The key sequence **ESC C** moves the cursor one line directly down, with no horizontal movement. If the cursor reaches the bottom of the text window, then the cursor remains on the bottom line and the text in the window scrolls up one line. The input line is not modified by the **ESC C** sequence. This, and **ESC D** (below), are useful for positioning the cursor at the beginning of another line on the screen, so that it may be re-entered with the retype key.

ESC D The **ESC D** sequence moves the cursor directly up one line, again without any horizontal movement. If the cursor reaches the top of the window, it stays there. The input line remains unmodified. This sequence is useful for moving the cursor to a previous line on the screen so that it may be re-entered with the retype key.

ESC E The **ESC E** sequence is called "clear to end of line". When COUT detects this sequence of keypresses, it clears the remainder of the screen line (not the input line!) from the cursor position to the right edge of the text window. The cursor remains where it is, and the input line is unmodified. **ESC E** always clears the rest of the line to blank spaces, regardless of the setting of the Normal/Inverse mode location (see above).

ESC F This sequence is called "clear to end of screen". It does just that: it clears everything in the window below or to the right of the cursor. As before, the cursor does not move and the input line is not modified. This is useful for erasing random garbage on a cluttered screen after a lot of cursor moves and editing.

ESC @ The **ESC @** sequence is called "home and clear". It clears the entire window and places the cursor in the upper left-hand corner. The screen is cleared to blank spaces, regardless of the setting of the Normal/Inverse location, and the input line is not changed (note that "@" is **SHIFT P**).

ESC K These four escape codes are synonyms for the four pure cursor moves given above.
ESC J When these four escape codes finish their respective functions, they do *not* turn off the
ESC M escape mode: you can continue typing these escape codes and moving the cursor around
ESC I the screen until you press any key other than another escape code. These four keys are placed in a "directional keypad" arrangement, so that the direction of each key from the center of the keypad corresponds to the direction which that escape code moves the cursor.




Figure 4. Cursor-moving Escape Codes.

THE RESET CYCLE

When you turn your Apple's power switch on* or press and release the **RESET** key, the Apple's 6502 microprocessor initiates a RESET cycle. It begins by jumping into a subroutine in the Apple's Monitor ROM. In the two different versions of this ROM, the Monitor ROM and the Autostart ROM, the RESET cycle does very different things.

AUTOSTART ROM RESET

Apples with the Autostart ROM begin their RESET cycles by flipping the soft switches which control the video screen to display the full primary page of Text mode, with Low-Resolution Graphics mixed mode lurking behind the veil of text. It then opens the text window to its full size, drops the output cursor to the bottom of the screen, and sets Normal video mode. Then it sets the COUT and KEYIN switches to use the Apple's internal keyboard and video display as the standard input and output devices. It flips annunciators 0 and 1 ON and annunciators 2 and 3 OFF on the Game I/O connector, clears the keyboard strobe, turns off any active I/O Expansion ROM (see page 84), and sounds a "beep!".

These actions are performed every time you press and release the **RESET** key on your Apple. At this point, the Autostart ROM peeks into two special locations in memory to see if it's been RESET before or if the Apple has just been powered up (these special locations are described below). If the Apple has just been turned on, then the Autostart ROM performs a "cold start"; otherwise, it does a "warm start".

1) **Cold Start.** On a freshly activated Apple, the RESET cycle continues by clearing the screen and displaying "APPLE II" top and center. It then sets up the special locations in memory to tell itself that it's been powered up and RESET. Then it starts looking through the rightmost seven slots in your Apple's backplane, looking for a Disk II Controller Card. It starts the search with Slot 7 and continues down to Slot 1. If it finds a disk controller card, then it proceeds to bootstrap the Apple Disk Operating System (DOS) from the diskette in the disk drive attached to the controller card it discovered. You can find a description of the disk bootstrapping procedure in *Do's and Don'ts of DOS*, Apple part number A2L0012, page 11.

If the Autostart ROM cannot find a Disk II controller card, or you press **RESET** again before the disk booting procedure has completed, then the RESET cycle will continue with a "lukewarm start". It will initialize and jump into the language which is installed in ROM on your Apple. For a Revision 0 Apple, either without an Applesoft II Firmware card or with such a card with its controlling switch in the DOWN position, the Autostart ROM will start Apple Integer BASIC. For Apple II-Plus systems, or Revision 0 Apple IIs with the Applesoft II Firmware card with the switch in the UP position, the Autostart ROM will begin Applesoft II Floating-Point BASIC.

2) **Warm Start.** If you have an Autostart ROM which has already performed a cold start cycle, then each time you press and release the **RESET** key, you will be returned to the language you were using, with your program and variables intact.

* Power-on RESET cycles occur only on Revision 1 Apples or Revision 0 Apples with at least one Disk II controller card.

AUTOSTART ROM SPECIAL LOCATIONS

The three "special locations" used by the Autostart ROM all reside in an area of RAM memory reserved for such system functions. Following is a table of the special locations used by the Autostart ROM:

Location:		Contents:
Decimal	Hex	
1010	S3F2	Soft Entry Vector. These two locations contain the address of the reentry point for whatever language is in use. Normally contains \$E003.
1011	S3F3	
1012	S3F4	Power-Up Byte. Normally contains \$45. See below.
64367 (-1169)	SFB6F	This is the beginning of a machine language subroutine which sets up the power-up location.

When the Apple is powered up, the Autostart ROM places a special value in the power-up location. This value is the Exclusive-OR of the value contained in location 1011 with the constant value 165. For example, if location 1011 contains 224 (its normal value), then the power-up value will be:

	Decimal	Hex	Binary
Location 1011	224	SE0	11100000
Constant	165	SA5	10100101
Power-Up Value	69	S45	01000101

Your programs can change the soft entry vector, so that when you press **RESET** you will go to some program other than a language. If you change this soft entry vector, however, you should make sure that you set the value of the power-up byte to the Exclusive-OR of the high part of your new soft entry vector with the constant decimal 165 (hexadecimal SA5). If you do not set this power-up value, then the next time you press **RESET** the Autostart ROM will believe that the Apple has just been turned on and it will do another cold start.

For example, you can change the soft entry vector to point to the Apple System Monitor, so that when you press **RESET** you will be placed into the Monitor. To make this change, you must place the address of the beginning of the Monitor into the two soft entry vector locations. The Monitor begins at location \$FF69, or decimal 65385. Put the last two hexadecimal digits of this address (\$69) into location S3F2 and the first two digits (\$FF) into location S3F3. If you are working in decimal, put 105 (which is the remainder of 65385/256) into location 1010 and the value 255 (which is the integer quotient of 65385/256) into location 1011.

Now you must set up the power-up location. There is a machine-language subroutine in the Autostart ROM which will automatically set the value of this location to the Exclusive-OR mentioned above. All you need to do is to execute a JSR (Jump to SubRoutine) instruction to the address SFB6F. If you are working in BASIC, you should perform a CALL -1169. Now everything is set, and the next time you press **RESET**, you will enter the System Monitor.

To make the **RESET** key work in its usual way, just restore the values in the soft entry vector to their former values (\$E003, or decimal 57347) and again call the subroutine described above.

“OLD MONITOR” ROM RESET

A RESET cycle in the Apple II Monitor ROM begins by setting Normal video mode, a full screen of Primary Page text with the Color Graphics mixed mode behind it, a fully-opened text window, and the Apple's standard keyboard and video screen as the standard input and output devices. It sounds a “beep!”, the cursor leaps to the bottom line of the uncleared text screen, and you find yourself facing an asterisk (*) prompt and talking to the Apple System Monitor.

CHAPTER 3

THE SYSTEM MONITOR

- 40 ENTERING THE MONITOR
- 40 ADDRESSES AND DATA
- 41 EXAMINING THE CONTENTS OF MEMORY
- 41 EXAMINING SOME MORE MEMORY
- 43 EXAMINING STILL MORE MEMORY
- 43 CHANGING THE CONTENTS OF A LOCATION
- 44 CHANGING THE CONTENTS OF CONSECUTIVE LOCATIONS
- 44 MOVING A RANGE OF MEMORY
- 46 COMPARING TWO RANGES OF MEMORY
- 46 SAVING A RANGE OF MEMORY ON TAPE
- 47 READING A RANGE FROM TAPE
- 48 CREATING AND RUNNING MACHINE LANGUAGE PROGRAMS
- 49 THE MINI-ASSEMBLER
- 51 DEBUGGING PROGRAMS
- 53 EXAMINING AND CHANGING REGISTERS
- 54 MISCELLANEOUS MONITOR COMMANDS
- 55 SPECIAL TRICKS WITH THE MONITOR
- 57 CREATING YOUR OWN COMMANDS
- 59 SUMMARY OF MONITOR COMMANDS
- 61 SOME USEFUL MONITOR SUBROUTINES
- 65 MONITOR SPECIAL LOCATIONS
- 66 MINI-ASSEMBLER INSTRUCTION FORMATS

Buried deep within the recesses of the Apple's ROM is a masterful program called the System Monitor. It acts as both a supervisor of the system and a slave to it; it controls all programs and all programs use it. You can use the powerful features of the System Monitor to discover the hidden secrets in all 65,536 memory locations. From the Monitor, you may look at one, some, or all locations; you may change the contents of any location; you can write programs in Machine and Assembly languages to be executed directly by the Apple's microprocessor; you can save vast quantities of data and programs onto cassette tape and read them back in again; you can move and compare thousands of bytes of memory with a single command; and you can leave the Monitor and enter any other program or language on the Apple.

ENTERING THE MONITOR

The Apple System Monitor program begins at location number SFF69 (decimal 65385 or -151) in memory. To enter the Monitor, you or your BASIC program can CALL this location. The Monitor's prompt (an asterisk [*]) will appear on the left edge of the screen, with a flashing cursor to its right. The Monitor accepts standard input lines (see page 32) just like any other system or language on the Apple. It will not take any action until you press **RETURN**. Your input lines to the Monitor may be up to 255 characters in length. When you have finished your stay in the Monitor, you can return to the language you were previously using by typing **CTRL C RETURN** (or, with the Apple DOS, **3 D 0 G RETURN**), or simply press **RESET**.*

ADDRESSES AND DATA

Talking to the Monitor is somewhat like talking to any other program or language on the Apple: you type a line on the keyboard, followed by a **RETURN**, and the Monitor will digest what you typed and act according to those instructions. You will be giving the Monitor three types of information: *addresses*, *values*, and *commands*. Addresses and values are given to the Monitor in hexadecimal notation. Hexadecimal notation uses the ten decimal digits (0-9) to represent themselves and the first six letters (A-F) to represent the numbers 10 through 15. A single hexadecimal digit can, therefore, have one of sixteen values from 0 to 15. A pair of hex digits can assume any value from 0 to 255, and a group of four hex digits can denote any number from 0 to 65,536. It so happens that any address in the Apple can be represented by four hex digits, and any value by two hex digits. This is how you tell the Monitor about addresses and values. When the Monitor is looking for an address, it will take any group of hex digits. If there are fewer than four digits in the group, it will prepend leading zeroes; if there are more than four hex digits, the Monitor will truncate the group and use only the last four hex digits. It follows the same procedure when looking for two-digit data values.

The Monitor recognizes 22 different command characters. Some of these are punctuation marks, others are upper-case letters or control characters. In the following sections, the full name of a command will appear in capital letters. The Monitor needs only the first letter of the command name. Some commands are invoked with control characters. You should note that although the Monitor recognizes and interprets these characters, a control character typed on an input line will *not* appear on the screen.

* This does not work on Apples without the Autostart ROM.

The Monitor remembers the addresses of up to five locations. Two of these are special: they are the addresses of the last location whose value you inquired about, and the location which is next to have its value changed. These are called the *last opened location* and the *next changeable location*. The usefulness of these two addresses will be revealed shortly.

EXAMINING THE CONTENTS OF MEMORY

When you type the address of a location in memory alone on an input line to the Monitor, it will reply* with the address you typed, a dash, a space, and the value** contained in that location, thus:

```
•E000
E000- 20
•300
0300- 99
•
```

Each time the Monitor displays the value contained in a location, it remembers that location as the *last opened location*. For technical reasons, it also considers that location as the *next changeable location*.

EXAMINING SOME MORE MEMORY

If you type a period (.) on an input line to the Monitor, followed by an address, the Monitor will display a *memory dump*: the values contained in all locations from the last opened location to the location whose address you typed following the period. The Monitor then considers the last location displayed to be both the last opened location and the next changeable location.

* In the examples, your queries are in normal type and the Apple replies in **boldface**.

** The values printed in these examples may differ from the values displayed by your Apple for the same instructions.

*20

#020- 00

*.2B

#021- 28 00 18 0F 0C 00 00

#028- A8 06 D0 07

*300

#300- 99

*.315

#301- B9 00 08 0A 0A 0A 99

#308- 00 08 C8 D0 F4 A6 2B A9

#310- 09 85 27 AD CC 03

*.32A

#316- 85 41

#318- 84 40 8A 4A 4A 4A 4A 09

#320- C0 85 3F A9 5D 85 3E 20

#328- 43 03 20

*

You should notice several things about the format of a memory dump. First, the first line in the dump begins with the address of the location *following* the last opened location; second, all other lines begin with addresses which end alternately in zeroes and eights; and third, there are never more than eight values displayed on a single line in a memory dump. When the Monitor does a memory dump, it starts by displaying the address and value of the location following the last opened location. It then proceeds to the next successive location in memory. If the address of that location ends in an 8 or a 0, the Monitor will "cut" to a new line and display the address of that location and continue displaying values. After it has displayed the value of the location whose address you specified, it stops the memory dump and sets the address of both the last opened and the next changeable location to be the address of the last location in the dump. If the address specified on the input line is less than the address of the last opened location, the Monitor will display the address and value of only the location following the last opened location.

You can combine the two commands (opening and dumping) into one operation by concatenating the second to the first; that is, type the first address, followed by a period and the second address. This two-addresses-separated-by-a-period form is called a *memory range*.

*300.32F

#300- 99 B9 00 08 0A 0A 0A 99

#308- 00 08 C8 D0 F4 A6 2B A9

#310- 09 85 27 AD CC 03 85 41

#318- 84 40 8A 4A 4A 4A 4A 09

#320- C0 85 3F A9 5D 85 3E 20

#328- 43 03 20 46 03 A5 3D 4D

*30.40

#030- AA 00 FF AA 05 C2 05 C2

#038- 1B FD D0 03 3C 00 40 00

#040- 30

*E015.E025

```
E#15- 4C ED FD
E#18- A9 2# C5 24 B# #C A9 8D
E#2#- A# #7 2# ED FD A9
*
```

EXAMINING STILL MORE MEMORY

A single press of the **[RETURN]** key will cause the Monitor to respond with one line of a memory dump; that is, a memory dump from the location following the last opened location to the next eight-location "cut". Once again, the last location displayed is considered the last opened and next changeable location.

```
*5
###5- ##
*[RETURN]
## ##
*[RETURN]
###8- ## ## ## ## ## ## ## ##
*32
##32- FF
*[RETURN]
AA ## C2 #5 C2
*[RETURN]
##38- 1B FD D# #3 3C ## 3F ##
*
```

CHANGING THE CONTENTS OF A LOCATION

You've heard all about the "next changeable location"; now you're going to use it. Type a colon followed by a value.

```
*0
####- ##
* : 5F
```

Presto! The contents of the next changeable location have just been changed to the value you typed. Check this by examining that location again:

```
*0
####- 5F
```

•

You can also combine opening and changing into one operation:

•302:42

•302

#302- 42

•

When you change the contents of a location, the old value which was contained in that location disappears, never to be seen again. The new value will stick around until it is replaced by another hexadecimal value.

CHANGING THE CONTENTS OF CONSECUTIVE LOCATIONS

You *don't* have to type an address, a colon, a value, and press **RETURN** for each and every location you wish to change. The Monitor will allow you to change the values of up to eighty-five locations at a time by typing only the initial address and colon, and then all the values separated by spaces. The Monitor will duly file the consecutive values in consecutive locations, starting at the next changeable location. After it has processed the string of values, it will assume that the location following the last changed location is the next changeable location. Thus, you can continue changing consecutive locations without breaking stride on the next input line by typing another colon and more values.

•300:69 01 20 ED FD 4C 0 3

•300

#300- 69

•**RETURN**

#1 2# ED FD 4C ## #3

•10:0 1 2 3

•:4 5 6 7

•10.17

##10- ## 01 02 03 04 05 06 07

•

MOVING A RANGE OF MEMORY

You can treat a range of memory (specified by two addresses separated by a period) as an entity

unto itself and move it from one place to another in memory by using the Monitor's MOVE command. In order to move a range of memory from one place to another, the Monitor must be told both where the range is situated in memory and where it is to be moved. You give this information to the Monitor in three parts: the address of the destination of the range, the address of the first location in the range proper, and the address of the last location in the range. You specify the starting and ending addresses of the range in the normal fashion, by separating them with a period. You indicate that this range is to be placed somewhere else by separating the range and the destination address with a left caret (<). Finally, you tell the Monitor that you want to move the range to the destination by typing the letter M, for "MOVE". The final command looks like this:

```
{destination} < {start} . {end} M
```

When you type this line to the Monitor, of course, the words in curly brackets should be replaced by hexadecimal addresses and the spaces should be omitted. Here are some real examples of memory moves:

```
*0.F
```

```
####- 5F 00 05 07 00 00 00 00
###8- 00 00 00 00 00 00 00 00
*300:A9 8D 20 ED FD A9 45 20 DA FD 4C 00 03
```

```
*300.30C
```

```
#300- A9 8D 20 ED FD A9 45 20
#308- DA FD 4C 00 03
*0<300.30CM
```

```
*0.C
```

```
####- A9 8D 20 ED FD A9 45 20
###8- DA FD 4C 00 03
*310<8.AM
```

```
*310.312
```

```
#310- DA FD 4C
*2<7.9M
```

```
*0.C
```

```
####- A9 8D 20 DA FD A9 45 20
###8- DA FD 4C 00 03
*
```

The Monitor simply makes a copy of the indicated range and moves it to the specified destination. The original range is left undisturbed. The Monitor remembers the last location in the original range as the last opened location, and the first location in the original range as the next changeable location. If the second address in the range specification is less than the first, then only one value (that of the first location in the range) will be moved.

If the destination address of the MOVE command is inside the original range, then strange and (sometimes) wonderful things happen: the locations between the beginning of the range and the

destination are treated as a sub-range and the values in this sub-range are replicated throughout the original range. See "Special Tricks", page 55, for an interesting application of this feature.

COMPARING TWO RANGES OF MEMORY

You can use the Monitor to compare two ranges of memory using much the same format as you use to move a range of memory from one place to another. In fact, the VERIFY command can be used immediately after a MOVE to make sure that the move was successful.

The VERIFY command, like the MOVE command, needs a range and a destination. In shorthand:

```
[destination] < [start] . [end] V
```

The Monitor compares the range specified with the range beginning at the destination address. If there is any discrepancy, the Monitor displays the address at which the difference was found and the two offending values.

```
*0:D7 F2 E9 F4 F4 E5 EE A0 E2 F9 A0 C3 C4 C5
*300<0.DM
*300<0.DV
*6:E4
*300<0.DV
###6-E4 (EE)
*
```

Notice that the VERIFY command, if it finds a discrepancy, displays the address of the location in the original range whose value differs from its counterpart in the destination range. If there is no discrepancy, VERIFY displays nothing. It leaves both ranges unchanged. The last opened and next changeable locations are set just as in the MOVE command. As before, if the ending address of the range is less than the starting address, the values of only the first locations in the ranges will be compared. VERIFY also does unusual things if the destination is within the original range; see "Special Tricks", page 55.

SAVING A RANGE OF MEMORY ON TAPE

The Monitor has two special commands which allow you to save a range of memory onto cassette tape and recall it again for later use. The first of these two commands, WRITE, lets you save the contents of one to 65,536 memory locations on standard cassette tape.

To save a range of memory to tape, give the Monitor the starting and ending addresses of the range, followed by the letter W (for WRITE):

[start] . [end] W

To get an accurate recording, you should put the tape recorder in *record* mode before you press **RETURN** on the input line. Let the tape run a few seconds, then press **RETURN**. The Monitor will write a ten-second "leader" tone onto the tape, followed by the data. When the Monitor is finished, it will sound a "'beep!" and give you another prompt. You should then rewind the tape, and label the tape with something intelligible about the memory range that's on the tape and what it's supposed to be.

```
•0.FF FF AD 30 C0 88 D0 04 C6 01 F0 08 C |
A D0 F6 A6 00 4C 02 00 60
```

•0.14

```
#####- FF FF AD 30 C0 88 D0 04
#####- C6 01 F0 08 CA D0 F6 A6
#####- 00 4C 02 00 60
```

•0.14W

.

It takes about 35 seconds total to save the values of 4,096 memory locations preceded by the ten-second leader onto tape. This works out to a speed of about 1,350 bits per second, average. The WRITE command writes one extra value on the tape after it has written the values in the memory range. This extra value is the *checksum*. It is the partial sum of all values in the range. The READ subroutine uses this value to determine if a READ has been successful (see below).

READING A RANGE FROM TAPE

Once you've saved a memory range onto tape with the Monitor's WRITE command, you can read that memory range back into the Apple by using the Monitor's READ command. The data values which you've stored on the tape need not be read back into the same memory range from whence they came; you can tell the Monitor to put those values into any similarly sized memory range in the Apple's memory.

The format of the READ command is the same as that of the WRITE command, except that the command letter is R, not W:

[start] . [end] R

Once again, after typing the command, don't press **RETURN**. Instead, start the tape recorder in PLAY mode and wait for the tape's nonmagnetic leader to pass by. Although the WRITE command puts a ten-second leader tone on the beginning of the tape, the READ command needs only three seconds of this leader in order to lock on to the frequency. So you should let a few seconds of tape go by before you press **RETURN**, to allow the tape recorder's output to settle down to a steady tone.

```
•0:0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 |
  0 0
```

•0.14

```

###- 00 00 00 00 00 00 00 00
###8- 00 00 00 00 00 00 00 00
##10- 00 00 00 00 00
*0.14R

*0.14

###- FF FF AD 30 C0 88 D0 #4
###8- C6 #1 F0 #8 CA D0 F6 A6
##10- 00 4C #2 00 60
*
```

After the Monitor has read in and stored all the values on the tape, it reads in the extra checksum value. It compares the checksum on the tape to its own checksum, and if the two differ, the Monitor beeps the speaker and displays "ERR". This warns you that there was a problem during the READ and that the values stored in memory aren't the values which were recorded on the tape. If, however, the two checksums match, the Monitor will give you another prompt.

CREATING AND RUNNING MACHINE LANGUAGE PROGRAMS

Machine language is certainly the most efficient language on the Apple, albeit the least pleasant in which to code. The Monitor has special facilities for those of you who are determined to use machine language to simplify creating, writing, and debugging machine language programs.

You can write a machine language program, take the hexadecimal values for the opcodes and operands, and store them in memory using the commands covered above. You can get a hexadecimal dump of your program, move it around in memory, or save it to tape and recall it again simply by using the commands you've already learned. The most important command, however, when dealing with machine language programs is the GO command. When you open a location from the Monitor and type the letter G, the Monitor will cause the 6502 microprocessor to start executing the machine language program which begins at the last opened location. The Monitor treats this program as a subroutine: when it's finished, all it need do is execute an RTS (return from subroutine) instruction and control will be transferred back to the Monitor.

Your machine language programs can call many subroutines in the Monitor to do various things. Here is an example of loading and running a machine language program to display the letters A through Z:

```

*300:A9 C1 20 ED FD 18 69 1 C9 DB D0 F6 60

*300.30C

#300- A9 C1 20 ED FD 18 69 #1
#308- C9 DB D0 F6 60
*300G
ABCDEF GHI JKLMNOPQRSTUVWXYZ
*
```

(The instruction set of the Apple's 6502 microprocessor is listed in Appendix A of this manual.)

Now, straight hexadecimal code isn't the easiest thing in the world to read or debug. With this in mind, the creators of the Apple's Monitor neatly included a command to list machine language programs in *assembly language* form. This means that instead of having one, two, or three bytes of unformatted hexadecimal gibberish per instruction you now have a three-letter mnemonic and some formatted hexadecimal gibberish to comprehend for each instruction. The LIST command to the Monitor will start at the specified location and display a screenfull (20 lines) of instructions:

```
*300L
#300- A9 C1      LDA #5C1
#302- 20 ED FD   JSR $FDED
#305- 18         CLC
#306- 69 01      ADC #501
#308- C9 DB      CMP #5DB
#30A- D0 F6      BNE $0302
#30C- 60        RTS
#30D- 00        BRK
#30E- 00        BRK
#30F- 00        BRK
#310- 00        BRK
#311- 00        BRK
#312- 00        BRK
#313- 00        BRK
#314- 00        BRK
#315- 00        BRK
#316- 00        BRK
#317- 00        BRK
#318- 00        BRK
#319- 00        BRK
*
```

Recognize those first few lines? They're the assembly language form of the program you typed in a page or so ago. The rest of the lines (the BRK instructions) are just there to fill up the screen. The address that you specify is remembered by the Monitor, but not in one of the ways explained before. It's put in the *Program Counter*, which is used solely to point to locations within programs. After a LIST command, the Program Counter is set to point to the location immediately following the last location displayed on the screen, so that if you do another LIST command it will continue with another screenfull of instructions, starting where the first screen left off.

THE MINI-ASSEMBLER

There is another program within the Monitor* which allows you to type programs into the Apple in the same assembly format which the LIST command displays. This program is called the Apple Mini-Assembler. It is a "mini"-assembler because it cannot understand symbolic labels, something that a full-blown assembler must do. To run the Mini-Assembler, type:

* The Mini-Assembler does not actually reside in the Monitor ROM, but is part of the Integer BASIC ROM set. Thus, it is not available on Apple II Plus systems or while Firmware Applesoft II is in use.

•F666G

!

You are now in the Mini-Assembler. The exclamation point (!) is the prompt character. During your stay in the Mini-Assembler, you can execute any Monitor command by preceding it with a dollar sign (\$). Aside from that, the Mini-Assembler has an instruction set and syntax all its own.

The Mini-Assembler remembers one address, that of the Program Counter. Before you start to enter a program, you must set the Program Counter to point to the location where you want your program to go. Do this by typing the address followed by a colon. Follow this with the mnemonic for the first instruction in your program, followed by a space. Now type the operand of the instruction (Formats for operands are listed on page 66). Now press **RETURN**. The Mini-Assembler converts the line you typed into hexadecimal, stores it in memory beginning at the location of the Program Counter, and then disassembles it again and displays the disassembled line on top of your input line. It then poses another prompt on the next line. Now it's ready to accept the second instruction in your program. To tell it that you want the next instruction to follow the first, don't type an address or a colon, but only a space, followed by the next instruction's mnemonic and operand. Press **RETURN**. It assembles that line and waits for another.

If the line you type has an error in it, the Mini-Assembler will beep loudly and display a circumflex (ˆ) under or near the offending character in the input line. Most common errors are the result of typographical mistakes: misspelled mnemonics, missing parentheses, etc. The Mini-Assembler also will reject the input line if you forget the space before or after a mnemonic or include an extraneous character in a hexadecimal value or address. If the destination address of a branch instruction is out of the range of the branch (more than 127 locations distant from the address of the instruction), the Mini-Assembler will also flag this as an error.

```

1300:LDX #02
#3#0-  A2 #2      LDX  #$#2
! LDA $0,X
#3#2-  B5 ##      LDA  $##,X
! STA $10,X
#3#4-  95 1#      STA  $1#,X
! DEX
#3#6-  CA          DEX
! STA $C030
#3#7-  8D 3# C#   STA  $C#3#
! BPL $302
#3#A-  1# F6      BPL  $#3#2
! BRK
#3#C-  ##         BRK
!
```

To exit the Mini-Assembler and re-enter the Monitor, either press **RESET** or type the Monitor

command (preceded by a dollar sign) FF69G:

```
!$FF69G
```

•

Your assembly language program is stored in memory. You can look at it again with the LIST command:

```
*300L
```

```
#300-  A2 #2      LDX  #S#2
#302-  B5 ##     LDA  S##,X
#304-  95 1#     STA  S1#,X
#306-  CA       DEX
#307-  8D 3# C#  STA  SC#3#
#30A-  1# F6     BPL  S#3#2
#30C-  ##       BRK
#30D-  ##       BRK
#30E-  ##       BRK
#30F-  ##       BRK
#310-  ##       BRK
#311-  ##       BRK
#312-  ##       BRK
#313-  ##       BRK
#314-  ##       BRK
#315-  ##       BRK
#316-  ##       BRK
#317-  ##       BRK
#318-  ##       BRK
#319-  ##       BRK
```

•

DEBUGGING PROGRAMS

As put so concisely by Lubarsky*, "There's always one more bug." Don't worry, the Monitor provides facilities for stepping through ornery programs to find that one last bug. The Monitor's STEP** command decodes, displays, and executes one instruction at a time, and the TRACE** command steps quickly through a program, stopping when a BRK instruction is executed.

Each STEP command causes the Monitor to execute the instruction in memory pointed to by the Program Counter. The instruction is displayed in its disassembled form, then executed. The contents of the 6502's internal registers are displayed after the instruction is executed. After execution, the Program Counter is bumped up to point to the next instruction in the program.

Here's what happens when you STEP through the program you entered using the Mini-Assembler, above:

* In *Murphy's Law, and Other Reasons why Things Go Wrong*, edited by Arthur Bloch. Price/Stern/Sloane 1977.

** The STEP and TRACE commands are not available on Apples with the Autostart ROM.

•300S

```
#300-  A2 #2      LDX  #S#2
A=#A X=#2 Y=D8 P=3# S=F8
•S

#302-  B5 ##      LDA  S##,X
A=#C X=#2 Y=D8 P=3# S=F8
•S

#304-  95 1#      STA  S1#,X
A=#C X=#2 Y=D8 P=3# S=F8
•12

##12-  #C
•S

#306-  CA          DEX
A=#C X=#1 Y=D8 P=3# S=F8
•S

#307-  8D 3# C#    STA  SC#3#
A=#C X=#1 Y=D8 P=3# S=F8
•S

#30A-  1# F6      BPL  S#3#2
A=#C X=#1 Y=D8 P=3# S=F8
•S

#302-  B5 ##      LDA  S##,X
A=#B X=#1 Y=D8 P=3# S=F8
•S

#304-  95 1#      STA  S1#,X
A=#B X=#1 Y=D8 P=3# S=F8
•
```

Notice that after the third instruction was executed, we examined the contents of location 12. They were as we expected, and so we continued stepping. The Monitor keeps the Program Counter and the last opened address separate from one another, so that you can examine or change the contents of memory while you are stepping through your program.

The TRACE command is just an infinite STEPPER. It will stop TRACEing the execution of a program only when you push RESET or it encounters a BRK instruction in the program. If the TRACE encounters the end of a program which returns to the Monitor via an RTS instruction, the TRACEing will run off into never-never land and must be stopped with the RESET button.

•T

```
#306-  CA          DEX
A=#B X=## Y=D8 P=32 S=F8
#307-  8D 3# C#    STA  SC#3#
A=#B X=## Y=D8 P=32 S=F8
#30A-  1# F6      BPL  S#3#2
```

```

A=#B X=## Y=D8 P=32 S=F8
#3#2- B5 ## LDA $##,X
A=#A X=## Y=D8 P=3# S=F8
#3#4- 95 1# STA $1#,X
A=#A X=## Y=D8 P=3# S=F8
#3#6- CA DEX
A=#A X=FF Y=D8 P=B# S=F8
#3#7- 8D 3# C# STA SC#3#
A=#A X=FF Y=D8 P=B# S=F8
#3#A- 1# F6 BPL $#3#2
A=#A X=FF Y=D8 P=B# S=F8
#3#C- ## BRK
#3#C- A=#A X=FF Y=D8 P=B# S=F8

```

EXAMINING AND CHANGING REGISTERS

As you saw above, the STEP and TRACE commands displayed the contents of the 6502's internal registers after each instruction. You can examine these registers at will or pre-set them when you TRACE, STEP, or GO a machine language program.

The Monitor reserves five locations in memory for the five 6502 registers: A, X, Y, P (processor status register), and S (stack pointer). The Monitor's EXAMINE command, invoked by a **CTRL E**, tells the Monitor to display the contents of these locations on the screen, and lets the location which holds the 6502's A-register be the next changeable location. If you want to change the values in these locations, just type a colon and the values separated by spaces. Next time you give the Monitor a GO, STEP, or TRACE command, the Monitor will load these five locations into their proper registers inside the 6502 before it executes the first instruction in your program.

• **CTRL E**

```

A=#A X=FF Y=D8 P=B# S=F8
•:B# 02

```

• **CTRL E**

```

A=B# X=#2 Y=D8 P=B# S=F8
•3#6S

```

```

#3#6- CA DEX
A=B# X=#1 Y=D8 P=3# S=F8
•S

```

```

#3#7- 8D 3# C# STA SC#3#
A=B# X=#1 Y=D8 P=3# S=F8
•S

```

```

#3#A- 1# F6 BPL $#3#2
A=B# X=#1 Y=D8 P=3# S=F8

```


MISCELLANEOUS MONITOR COMMANDS

You can control the setting of the Inverse/Normal location used by the COUT subroutine (see page 32) from the Monitor so that all of the Monitor's output will be in Inverse video. The INVERSE command does this nicely. Input lines are still displayed in Normal mode, however. To return the Monitor's output to Normal mode, use the NORMAL command.

• 0 . F

####- #A #B #C #D #E #F D# #4

####8- C6 #1 F# #8 CA D# F6 A6

• I

• 0 . F

####- #A #B #C #D #E #F D# #4

####8- C6 #1 F# #8 CA D# F6 A6

• N

• 0 . F

####- #A #B #C #D #E #F D# #4

####8- C6 #1 F# #8 CA D# F6 A6

•

The BASIC command, invoked by a **CTRL B**, lets you leave the Monitor and enter the language installed in ROM on your Apple, usually either Apple Integer or Applesoft II BASIC. Any program or variables that you had previously in BASIC will be lost. If you've left BASIC for the Monitor and you want to re-enter BASIC with your program and variables intact, use the **CTRL C** (CONTINUE BASIC) command. If you have the Apple Disk Operating System (DOS) active, the '3D0G' command will return you to the language you were using, with your program and variables intact.

The PRINTER command, activated by a **CTRL P**, diverts all output normally destined for the screen to an Apple Intelligent Interface® in a given slot in the Apple's backplane. The slot number should be from 1 to 7, and there should be an interface card in the given slot, or you will lose control of your Apple and your program and variables may be lost. The format for the command is:

[slot number] **CTRL P**

A PRINTER command to slot number 0 will reset the flow of printed output back to the Apple's video screen.

The KEYBOARD command similarly substitutes the device in a given backplane slot for the Apple's keyboard. For details on how these commands and their BASIC counterparts PR# and IN# work, please refer to "CSW and KSW Switches", page 83. The format for the KEYBOARD command is:

[slot number] **CTRL K**

A slot number of 0 for the KEYBOARD command will force the Monitor to listen for input from the Apple's built-in keyboard.

The Monitor will also perform simple hexadecimal addition and subtraction. Just type a line in the format:

```
{value} + {value}
{value} - {value}
```

The Apple will perform the arithmetic and display the result:

```
* 20+13
=33
* 4A-C
=3E
* FF+4
=#3
* 3-4
=FF
*
```

SPECIAL TRICKS WITH THE MONITOR

You can put as many Monitor commands on a single line as you like, as long as you separate them with spaces and the total number of characters in the line is less than 254. You can intermix any and all commands freely, except the STORE (:) command. Since the Monitor takes all values following a colon and places them in consecutive memory locations, the last value in a STORE must be followed by a letter command before another address is encountered. The NORMAL command makes a good separator; it usually has no effect and can be used anywhere.

```
* 300.307 300:18 69 1 N 300.302 300S S
#300- #0 #0 #0 #0 #0 #0 #0 #0
#300- 18 69 #1
#300- 18 CLC
A=#4 X=#1 Y=D8 P=30 S=F8
#301- 69 #1 ADC #5#1
A=#5 X=#1 Y=D8 P=30 S=F8
*
```

Single-letter commands such as L, S, I, and N need not be separated by spaces.

If the Monitor encounters a character in the input line which it does not recognize as either a hexadecimal digit or a valid command character, it will execute all commands on the input line up to that character, and then grind to a halt with a noisy beep, ignoring the remainder of the input line.

The MOVE command can be used to replicate a pattern of values throughout a range in memory.

To do this, first store the pattern in its first position in the range:

```
*300:11 22 33
```

*

Remember the number of values in the pattern: in this case, 3. Then use this special arrangement of the MOVE command:

```
{start+number} < {start} . {end-number} M
```

This MOVE command will first replicate the pattern at the locations immediately following the original pattern, then re-replicate that pattern following itself, and so on until it fills the entire range.

```
*303<300.32DM
```

```
*300.32F
```

```
#300- 11 22 33 11 22 33 11 22
```

```
#308- 33 11 22 33 11 22 33 11
```

```
#310- 22 33 11 22 33 11 22 33
```

```
#318- 11 22 33 11 22 33 11 22
```

```
#320- 33 11 22 33 11 22 33 11
```

```
#328- 22 33 11 22 33 11 22 33
```

*

A similar trick can be done with the VERIFY command to check whether a pattern repeats itself through memory. This is especially useful to verify that a given range of memory locations all contain the same value:

```
*300:0
```

```
*301<300.31FM
```

```
*301<300.31FV
```

```
*304:02
```

```
*301<300.31FV
```

```
#303-00 (#2)
```

```
#304-02 (##)
```

*

You can create a command line which will repeat all or part of itself indefinitely by beginning the part of the command line which is to be repeated with a letter command, such as N, and ending it with the sequence 34:n, where n is a hexadecimal number specifying the character position of the command which begins the loop; for the first character in the line, n=0. The value for n must be followed with a space in order for the loop to work properly.

```
*N 300 302 34:0
```

```
#300- 11
```

```

#3#2- 33
#3##- 11
#3#2- 33
#3##- 11
#3#2- 33
#3##- 11
#3#2- 33
#3##- 11
#3#2- 33
#3##- 11
#3#2- 33
#3#
.
```

The only way to stop a loop like this is to press **RESET**.

CREATING YOUR OWN COMMANDS

The **USER (CTRL Y)** command, when encountered in the input line, forces the Monitor to jump to location number \$3F8 in memory. You can put your own **JMP** instruction in this location which will jump to your own program. Your program can then either examine the Monitor's registers and pointers or the input line itself. For example, here is a program which will make the **CTRL Y** command act as a "comment" indicator: everything on the input line following the **CTRL Y** will be displayed and ignored.

```

•F666G
!3#0:LDY $34

#3##-   A4 34      LDY   $34
! LDA 2#0,Y

#3#2-   B9 ## #2   LDA   $#2##,Y
! JSR FDED

#3#5-   2# ED FD   JSR   $FDED
! INY

#3#8-   C8          INY
! CMP #$8D

#3#9-   C9 8D      CMP   #$8D
! BNE 3#2

#3#B-   D# F5      BNE   $#3#2
! JMP $FF69

#3#D-   4C 69 FF   JMP   $FF69
!3F8:JMP $3#0

#3F8-   4C ## #3   JMP   $#3##
```

!\$FF69G

• **CTRL Y** THIS IS A TEST.
THIS IS A TEST.

•

SUMMARY OF MONITOR COMMANDS

Summary of Monitor Commands.

Examining Memory.

{adrs}	Examines the value contained in one location.
{adrs1}. {adrs2}	Displays the values contained in all locations between {adrs1} and {adrs2}.
RETURN	Displays the values in up to eight locations following the last opened location.

Changing the Contents of Memory.

{adrs}: {val} [val] ...	Stores the values in consecutive memory locations starting at {adrs}.
: {val} [val] ...	Stores values in memory starting at the next changeable location.

Moving and Comparing.

{dest} < {start}. {end} M	Copies the values in the range {start}. {end} into the range beginning at {dest}.
{dest} < {start}. {end} V	Compares the values in the range {start}. {end} to those in the range beginning at {dest}.

Saving and Loading via Tape.

{start}. {end} W	Writes the values in the memory range {start}. {end} onto tape, preceded by a ten-second leader.
{start}. {end} R	Reads values from tape, storing them in memory beginning at {start} and stopping at {end}. Prints "ERR" if an error occurs.

Running and Listing Programs.

{adrs} G	Transfers control to the machine language program beginning at {adrs}.
{adrs} L	Disassembles and displays 20 instructions, starting at {adrs}. Subsequent L's will display 20 more instructions each.

The Mini-Assembler

F666G	Invoke the Mini-Assembler.*
{command}	Execute a Monitor command from the Mini-Assembler.
SFF69G	Leave the Mini-Assembler.
{adrs} S	Disassemble, display, and execute the instruction at {adrs}, and display the contents of the 6502's internal registers. Subsequent S's will display and execute successive instructions.**
{adrs} T	Step infinitely. The TRACE command stops only when it executes a BRK instruction or when you press RESET .**
CTRL E	Display the contents of the 6502's registers.
Miscellaneous.	
I	Set Inverse display mode.
N	Set Normal display mode.
CTRL B	Enter the language currently installed in the Apple's ROM.
CTRL C	Reenter the language currently installed in the Apple's ROM.
{val} + {val}	Add the two values and print the result.
{val} - {val}	Subtract the second value from the first and print the result.
{slot} CTRL P	Divert output to the device whose interface card is in slot number {slot}. If {slot}=0, then route output to the Apple's screen.
{slot} CTRL K	Accept input from the device whose interface card is in slot number {slot}. If {slot}=0, then accept input from the Apple's keyboard.
CTRL Y	Jump to the machine language subroutine at location \$3F8.

* Not available in the Apple II Plus.

** Not available in the Autostart ROM.

SOME USEFUL MONITOR SUBROUTINES

Here is a list of some useful subroutines in the Apple's Monitor and Autostart ROMs. To use these subroutines from machine language programs, load the proper memory locations or 6502 registers as required by the subroutine and execute a JSR to the subroutine's starting address. It will perform the function and return with the 6502's registers set as described.

\$FDED COUT Output a character

COUT is the standard character output subroutine. The character to be output should be in the accumulator. COUT calls the current character output subroutine whose address is stored in CSW (locations \$36 and \$37), usually COUT1 (see below).

\$FDF0 COUT1 Output to screen

COUT1 displays the character in the accumulator on the Apple's screen at the current output cursor position and advances the output cursor. It places the character using the setting of the Normal/Inverse location. It handles the control characters RETURN, linefeed, and bell. It returns with all registers intact.

\$FE80 SETINV Set Inverse mode

Sets Inverse video mode for COUT1. All output characters will be displayed as black dots on a white background. The Y register is set to \$3F, all others are unchanged.

\$FE84 SETNORM Set Normal mode

Sets Normal video mode for COUT1. All output characters will be displayed as white dots on a black background. The Y register is set to \$FF, all others are unchanged.

\$FD8E CROUT Generate a RETURN

CROUT sends a RETURN character to the current output device.

\$FD8B CROUT1 RETURN with clear

CROUT1 clears the screen from the current cursor position to the edge of the text window, then calls CROUT.

\$FD8A PRBYTE Print a hexadecimal byte

This subroutine outputs the contents of the accumulator in hexadecimal on the current output device. The contents of the accumulator are scrambled.

\$FDE3 PRHEX Print a hexadecimal digit

This subroutine outputs the lower nybble of the accumulator as a single hexadecimal digit. The contents of the accumulator are scrambled.

\$F941 PRNTAX Print A and X in hexadecimal

This outputs the contents of the A and X registers as a four-digit hexadecimal value. The accumulator contains the first byte output, the X register contains the second. The contents of the

accumulator are usually scrambled.

SF948 **PRBLNK** **Print 3 spaces**

Outputs three blank spaces to the standard output device. Upon exit, the accumulator usually contains \$A0, the X register contains 0.

SF94A **PRBL2** **Print many blank spaces**

This subroutine outputs from 1 to 256 blanks to the standard output device. Upon entry, the X register should contain the number of blanks to be output. If X=\$00, then PRBL2 will output 256 blanks.

SFF3A **BELL** **Output a "bell" character**

This subroutine sends a bell (CTRL G) character to the current output device. It leaves the accumulator holding \$87.

SFBDD **BELL1** **Beep the Apple's speaker**

This subroutine beeps the Apple's speaker for .1 second at 1KHz. It scrambles the A and X registers.

SFD#C **RDKEY** **Get an input character**

This is the standard character input subroutine. It places a flashing input cursor on the screen at the position of the output cursor and jumps to the current input subroutine whose address is stored in KSW (locations \$38 and \$39), usually KEYIN (see below).

SFD35 **RDCHAR** **Get an input character or ESC code**

RDCHAR is an alternate input subroutine which gets characters from the standard input, but also interprets the eleven escape codes (see page 34).

SFD1B **KEYIN** **Read the Apple's keyboard**

This is the keyboard input subroutine. It reads the Apple's keyboard, waits for a keypress, and randomizes the random number seed (see page 32). When it gets a keypress, it removes the flashing cursor and returns with the keycode in the accumulator.

SFD6A **GETLN** **Get an input line with prompt**

GETLN is the subroutine which gathers input lines (see page 33). Your programs can call GETLN with the proper prompt character in location \$33; GETLN will return with the input line in the input buffer (beginning at location \$200) and the X register holding the length of the input line.

SFD67 **GETLNZ** **Get an input line**

GETLNZ is an alternate entry point for GETLN which issues a carriage return to the standard output before falling into GETLN (see above).

SFD6F GETLN1 Get an input line, no prompt

GETLN1 is an alternate entry point for GETLN which does not issue a prompt before it gathers the input line. If, however, the user cancels the input line, either with too many backspaces or with a **CTRL X**, then GETLN1 will issue the contents of location \$33 as a prompt when it gets another line.

SFCA8 WAIT Delay

This subroutine delays for a specific amount of time, then returns to the program which called it. The amount of delay is specified by the contents of the accumulator. With **A** the contents of the accumulator, the delay is $\frac{1}{2}(26 + 27A + 5A^2)$ μ seconds. WAIT returns with the **A** register zeroed and the **X** and **Y** registers undisturbed.

SF864 SETCOL Set Low-Res Graphics color

This subroutine sets the color used for plotting on the Low-Res screen to the color passed in the accumulator. See page 17 for a table of Low-Res colors.

SF85F NEXTCOL Increment color by 3

This adds 3 to the current color used for Low-Res Graphics.

SF8#0 PLOT Plot a block on the Low-Res screen

This subroutine plots a single block on the Low-Res screen of the prespecified color. The block's vertical position is passed in the accumulator, its horizontal position in the **Y** register. PLOT returns with the accumulator scrambled, but **X** and **Y** unmolested.

SF819 HLINE Draw a horizontal line of blocks

This subroutine draws a horizontal line of blocks of the predetermined color on the Low-Res screen. You should call HLINE with the vertical coordinate of the line in the accumulator, the leftmost horizontal coordinate in the **Y** register, and the rightmost horizontal coordinate in location \$2C. HLINE returns with **A** and **Y** scrambled, **X** intact.

SF828 VLINE Draw a vertical line of blocks

This subroutine draws a vertical line of blocks of the predetermined color on the Low-Res screen. You should call VLINE with the horizontal coordinate of the line in the **Y** register, the top vertical coordinate in the accumulator, and the bottom vertical coordinate in location \$2D. VLINE will return with the accumulator scrambled.

SF832 CLRSCR Clear the entire Low-Res screen

CLRSCR clears the entire Low-resolution Graphics screen. If you call CLRSCR while the video display is in Text mode, it will fill the screen with inverse-mode "@" characters. CLRSCR destroys the contents of **A** and **Y**.

SF836 CLRTOP Clear the top of the Low-Res screen

CLRTOP is the same as CLRSCR (above), except that it clears only the top 40 rows of the screen.

\$F871 SCRN Read the Low-Res screen

This subroutine returns the color of a single block on the Low-Res screen. Call it as you would call PLOT (above). The color of the block will be returned in the accumulator. No other registers are changed.

\$FB1E PREAD Read a Game Controller

PREAD will return a number which represents the position of a game controller. You should pass the number of the game controller (0 to 3) in the X register. If this number is not valid, strange things may happen. PREAD returns with a number from \$00 to \$FF in the Y register. The accumulator is scrambled.

\$FF2D PRERR Print "ERR"

Sends the word "ERR", followed by a bell character, to the standard output device. The accumulator is scrambled.

\$FF4A IOSAVE Save all registers

The contents of the 6502's internal registers are saved in locations \$45 through \$49 in the order A-X-Y-P-S. The contents of A and X are changed; the decimal mode is cleared.

\$FF3F IOREST Restore all registers

The contents of the 6502's internal registers are loaded from locations \$45 through \$49.

MONITOR SPECIAL LOCATIONS

Table 14: Page Three Monitor Locations

Address:		Use:	
Decimal	Hex	Monitor ROM	Autostart ROM
1008	S3F0	None.	Holds the address of the subroutine which handles machine language "BRK" requests (normally SFA59).
1009	S3F1		
1010	S3F2	None.	Soft Entry Vector.
1011	S3F3		
1012	S3F4	None.	Power-up Byte.
1013	S3F5	Holds a "JuMP" instruction to the subroutine which handles Applesoft II "&" commands.* Normally S4C S58 SFF.	
1014	S3F6		
1015	S3F7		
1016	S3F8	Holds a "JuMP" instruction to the subroutine which handles "USER" (<u>CTRL Y</u>) commands.	
1017	S3F9		
1018	S3FA		
1019	S3FB	Holds a "JuMP" instruction to the subroutine which handles Non-Maskable Interrupts.	
1020	S3FC		
1021	S3FD		
1022	S3FE	Holds the address of the subroutine which handles Interrupt ReQuests.	
1023	S3FF		

* See page 123 in the Applesoft II BASIC Reference Manual.

MINI-ASSEMBLER INSTRUCTION FORMATS

The Apple Mini-Assembler recognizes 56 mnemonics and 13 addressing formats used in 6502 Assembly language programming. The mnemonics are standard, as used in the **MOS Technology/Synertek 6500 Programming Manual** (Apple part number A2L0003), but the addressing formats are different. Here are the Apple standard address mode formats for 6502 Assembly Language:

Mode:	Format:
Accumulator	None.
Immediate	#S[value]
Absolute	S[address]
Zero Page	S[address]
Indexed Zero Page	S[address],X S[address],Y
Indexed Absolute	S[address],X S[address],Y
Implied	None.
Relative	S[address]
Indexed Indirect	(S[address],X)
Indirect Indexed	(S[address]),Y
Absolute Indirect	(S[address])

An [address] consists of one or more hexadecimal digits. The Mini-Assembler interprets addresses in the same manner that the Monitor does: if an address has fewer than four digits, it adds leading zeroes; if it has more than four digits, then it uses only the last four.

All dollar signs (\$), signifying that the addresses are in hexadecimal notation, are ignored by the Mini-Assembler and may be omitted.

There is no syntactical distinction between the Absolute and Zero Page addressing modes. If you give an instruction to the Mini-Assembler which can be used in both Absolute and Zero-Page mode, then the Mini-Assembler will assemble that instruction in Absolute mode if the operand for that instruction is greater than \$FF, and it will assemble that instruction in Zero Page mode if the operand for that instruction is less than \$0100.

Instructions with the Accumulator and Implied addressing modes need no operand.

Branch instructions, which use the Relative addressing mode, require the *target address* of the branch. The Mini-Assembler will automatically figure out the relative distance to use in the instruction. If the target address is more than 127 locations distant from the instruction, then the Mini-Assembler will sound a "beep", place a circumflex (^) under the target address, and ignore the line.

If you give the Mini-Assembler the mnemonic for an instruction and an operand, and the addressing mode of the operand cannot be used with the instruction you entered, then the Mini-Assembler will not accept the line.

CHAPTER 4

MEMORY ORGANIZATION

- 68 RAM STORAGE
- 70 RAM CONFIGURATION BLOCKS
- 72 ROM STORAGE
- 73 I/O LOCATIONS
- 74 ZERO PAGE MEMORY MAPS

The Apple's 6502 microprocessor can directly reference a total of 65,536 distinct memory locations. You can think of the Apple's memory as a book with 256 "pages", with 256 memory locations on each page. For example, "page \$30" is the 256 memory locations beginning at location \$3000 and ending at location \$30FF. Since the 6502 uses two eight-bit bytes to form the address of any memory location, you can think of one of the bytes as the *page number* and the other as the *location within the page*.

The Apple's 256 pages of memory fall into three categories: Random Access Memory (RAM), Read-Only Memory (ROM), and Input/Output locations (I/O). Different areas of memory are dedicated to different functions. The Apple's basic memory map looks like this:

System Memory Map			
Page Number:			
Decimal	Hex		
0	\$00	RAM (48K)	
1	\$01		
2	\$02		
.	.		
.	.		
.	.		
190	\$BE		
191	\$BF		
192	\$C0		I/O (2K)
193	\$C1		
.	.		
.	.		
.	.		
198	\$C6		
199	\$C7		
200	\$C8	I/O ROM (2K)	
201	\$C9		
.	.		
.	.		
.	.		
206	\$CE		
207	\$CF		
208	\$D0		ROM (12K)
209	\$D1		
.	.		
.	.		
.	.		
254	\$FE		
255	\$FF		

Figure 5. System Memory Map

RAM STORAGE

The area in the Apple's memory map which is allocated for RAM memory begins at the bottom

of Page Zero and extends up to the end of Page 191. The Apple has the capacity to house from 4K (4,096 bytes) to 48K (49,152 bytes) of RAM on its main circuit board. In addition, you can expand the RAM memory of your Apple all the way up to 64K (65,536 bytes) by installing an Apple Language Card (part number A2B0006). This extra 16K of RAM takes the place of the Apple's ROM memory, with two 4K segments of RAM sharing the 4K range from \$D000 to \$DFFF.

Most of your Apple's RAM memory is available to you for the storage of programs and data. The Apple, however, does reserve some locations in RAM for use of the System Monitor, various languages, and other system functions. Here is a map of the available areas in RAM memory:

Table 16: RAM Organization and Usage		
Page Number:		Used For:
Decimal	Hex	
0	\$00	System Programs
1	\$01	System Stack
2	\$02	GETLN Input Buffer
3	\$03	Monitor Vector Locations
4	\$04	Text and Lo-Res Graphics Primary Page Storage
5	\$05	
6	\$06	
7	\$07	
8	\$08	Text and Lo-Res Graphics Secondary Page Storage
9	\$09	
10	\$0A	
11	\$0B	
12 through 31	\$0C \$1F	
32 through 63	\$20 \$3F	Hi-Res Graphics Primary Page Storage
64 through 95	\$40 \$5F	Hi-Res Graphics Secondary Page Storage
96 through 191	\$60 \$BF	

FREE

RAM

Following is a breakdown of which ranges are assigned to which functions:

Zero Page. Due to the construction of the Apple's 6502 microprocessor, the lowermost page in the Apple's memory is prime real estate for machine language programs. The System Monitor uses about 20 locations on Page Zero; Apple Integer BASIC uses a few more; and Applesoft II BASIC and the Apple Disk Operating System use the rest. Tables 18, 19, 20, and 21 show the locations on zero page which are used by these system functions.

Page One. The Apple's 6502 microprocessor reserves all 256 bytes of Page 1 for use as a "stack". Even though the Apple usually uses less than half of this page at any one time, it is not easy to determine just what is being used and what is lying fallow, so you shouldn't try to use

Page 1 to store any data.

Page Two. The GETLN subroutine, which is used to get input lines by most programs and languages, uses Page 2 as its input buffer. If you're sure that you won't be typing any long input lines, then you can (somewhat) safely store temporary data in the upper regions of Page 2.

Page Three. The Apple's Monitor ROM (both the Autostart and the original) use the upper sixteen locations in Page Three, from location \$3F0 to \$3FF (decimal 1008 to 1023). The Monitor's use of these locations is outlined on page 62.

Pages Four through Seven. This 1,024-byte range of memory locations is used for the Text and Low-Resolution Graphics Primary Page display, and is therefore unusable for storage purposes. There are 64 locations in this range which are not displayed on the screen. These 64 locations are reserved for use by the peripheral cards (see page 82).

RAM CONFIGURATION BLOCKS

The Apple's RAM memory is composed of eight to 24 integrated circuits. These IC's reside in three rows of sockets on the Apple board. Each row can hold eight chips of either the 4,096-bit (4K) or 16,384-bit (16K) variety. The 4K RAM chips are of the Mostek "4096" family, and may be marked "MK4096" or "MCM6604". The 16K chips are of the "4116" type, and may have the denomination "MK4116" or "UPD4160". Each row must have eight of the same type of chip, although different rows may hold different types.

A row of eight 16K IC's represents 16,384 eight-bit bytes of RAM. The leftmost IC in a row represents the lowermost (least significant) bit of every byte in that range, and the rightmost IC in a row represents the uppermost (most significant) bit of every byte. The row of RAM IC's which is frontmost on the Apple board holds the RAM memory which begins at location 0 in the memory map; the next row back continues where the first left off.

You can tell the Apple how much memory it has, and of what type it is, by plugging *Memory Configuration Blocks* into three IC sockets on the left side of the Apple board. These configuration blocks are three 14-legged critters which look like big, boxy integrated circuits. But there are no chips inside of them; only three jumper wires in each. The jumper wires "strap" each row of RAM chips into a specific place in the Apple's memory map. All three configuration blocks should be strapped the same way. Apple supplies several types of standard configuration blocks for the most common system sizes. A set of these was installed in your Apple when it was built, and you get a new set each time you purchase additional memory for your Apple. If, however, you want to expand your Apple's memory with some RAM chips that you did not purchase from Apple, you may have to construct your own configuration blocks (or modify the ones already in your Apple).

There are nine different RAM memory configurations possible in your Apple. These nine memory sizes are made up from various combinations of 4K and 16K RAM chips in the three rows of sockets in your Apple. The nine memory configurations are:

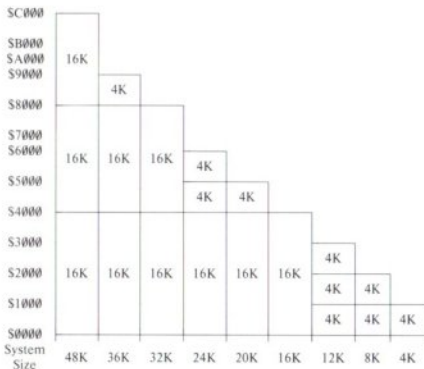


Figure 6. Memory Configurations

Of the fourteen "legs" on each controller block, the three in the upper-right corner (looking at it from above) represent the three rows of RAM chips on the Apple's main board. There should be a wire jumper from each one of these pins to another pin in the configuration block. The "other pin" corresponds to a place in the Apple's memory map where you want the RAM chips in each row to reside. The pins on the configuration block are represented thus:

4K range \$0000-\$0FFF	1	14	Frontmost row ("C")
4K range \$1000-\$1FFF	2	13	Middle row ("D")
4K range \$2000-\$2FFF	3	12	Backmost row ("E")
4K range \$3000-\$3FFF	4	11	No connection.
4K range \$4000-\$4FFF	5	10	16K range \$0000-\$3FFF
4K range \$5000-\$5FFF	6	9	16K range \$4000-\$7FFF
4K range \$8000-\$8FFF	7	8	16K range \$8000-\$BFFF

Figure 7. Memory Configuration Block Pinouts

If a row contains eight chips of the 16K variety, then you should connect a jumper wire from the pin corresponding to that row to a pin corresponding to a 16K range of memory. Similarly, if a row contains eight 4K chips, you should connect a jumper wire from the pin for that row to a pin corresponding to a 4K range of memory. You should *never* put 4K chips in a row strapped for 16K, or vice versa. It is also not advisable to leave a row unstrapped, or to strap two rows into the same range of memory.

You should always make sure that there is some kind of memory beginning at location 0. Your Apple's memory should be in one contiguous block, but it does not need to be. For example, if you have only three sets of 4K chips, but you want to use the primary page of the High-

Resolution Graphics mode, then you would strap one row of 4K chips to the beginning of memory (4K range \$0000 through \$0FFF), and strap the other two rows to the memory range used by the High-Resolution Graphics primary page (4K ranges \$2000 through \$2FFF and \$3000 through \$3FFF). This will give you 4K bytes of RAM memory to work with, and 8K bytes of RAM to be used as a picture buffer.

Notice that the configuration blocks are installed into the Apple with their front edges (the edge with the white dot, representing pin 1) towards the front of the Apple.

There is a problem in Apples with Revision 0 boards and 20K or 24K of RAM. In these systems, the 8K range of the memory map from \$4000 to \$5FFF is duplicated in the memory range \$6000 to \$7FFF, regardless of whether it contains RAM or not. So systems with only 20K or 24K of RAM would appear to have 24K or 36K, but this extra RAM would be only imaginary. This has been changed in the Revision 1 Apple boards.

ROM STORAGE

The Apple, in its natural state, can hold from 2K (2,048 bytes) to 12K (12,288 bytes) of Read-Only memory on its main board. This ROM memory can include the System Monitor, a couple of dialects of the BASIC language, various system and utility programs, or pre-packaged subroutines such as are included in Apple's *Programmer's Aid #1* ROM.

The Apple's ROM memory resides in the top 12K (48 pages) of the memory map, beginning at location \$D000. For proper operation of the Apple, there must be some kind of ROM in the uppermost locations of memory. When you turn on the Apple's power supply, the microprocessor must have some program to execute. It goes to the top locations in the memory map for the address of this program. In the Apple, this address is stored in ROM, and is the address of a program within the same ROM. This program initializes the Apple and lets you start to use it. (For a description of the startup cycle, see "The RESET Cycle", page 36.)

Here is a map of the Apple's ROM memory, and of the programs and packages that Apple currently supports in ROM:

Table 17: ROM Organization and Usage			
Page Number:		Used By:	
Decimal	Hex		
208	SD0	Programmer's Aid #1	Applesoft II BASIC
212	SD4		
216	SD8		
220	SDC		
224	SE0	Integer BASIC	
228	SE4		
232	SE8		
236	SEC		
240	SF0		
244	SF4	Utility Subroutines	
248	SF8	Monitor ROM	Autostart ROM
252	SFC		

Six 24-pin IC sockets on the Apple's board hold the ROM integrated circuits. Each socket can hold one of a type 9316B 2,048-byte by 8-bit Read-Only Memory. The leftmost ROM in the Apple's board holds the upper 2K of ROM in the Apple's memory map; the rightmost ROM IC holds the ROM memory beginning at page 5D0 in the memory map. If a ROM is not present in a given socket, then the values contained in the memory range corresponding to that socket will be unpredictable.

The Apple Firmware card can disable some or all of the ROMs on the Apple board, and substitute its own ROMs in their place. When you have an Apple Firmware card installed in any slot in the Apple's board, you can disable the Apple's on-board ROMs by flipping the card's controller switch to its UP position and pressing and releasing the **RESET** button, or by referencing location SC080 (decimal 49280 or -16256). To enable the Apple's on-board ROMs again, flip the controller switch to the DOWN position and press **RESET**, or reference location SC081 (decimal 49281 or -16255). For more information, see Appendix A of the **Applesoft II BASIC Programming Reference Manual**.

I/O LOCATIONS

4,096 memory locations (16 pages) of the Apple's memory map are dedicated to input and output functions. This 4K range begins at location SC000 (decimal 49152 or -16384) and extends on up to location SCFFF (decimal 53247 or -12289). Since these functions are somewhat intricate, they have been given a chapter all to themselves. Please see Chapter 5 for information on the allocation of Input/Output locations.

ZERO PAGE MEMORY MAPS

Table 18: Monitor Zero Page Usage

Decimal	Hex	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
		S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	SA	SB	SC	SD	SE	SF
0	S00																
16	S10																
32	S20	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
48	S30	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
64	S40	•	•	•	•	•	•	•	•	•	•					•	•
80	S50	•	•	•	•	•	•										
96	S60																
112	S70																
128	S80																
144	S90																
160	SA0																
176	SB0																
192	SC0																
208	SD0																
224	SE0																
240	SF0																

Table 19: Applesoft II BASIC Zero Page Usage

Decimal	Hex	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
		S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	SA	SB	SC	SD	SE	SF
0	S00	•	•	•	•	•	•					•	•	•	•	•	•
16	S10	•	•	•	•	•	•	•	•	•							
32	S20																
48	S30																
64	S40																
80	S50	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
96	S60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
112	S70	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
128	S80	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
144	S90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
160	SA0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
176	SB0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
192	SC0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
208	SD0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
224	SE0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
240	SF0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Table 20: Apple DOS 3.2 Zero Page Usage

Decimal	Hex	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
		\$0	\$1	\$2	\$3	\$4	\$5	\$6	\$7	\$8	\$9	\$A	\$B	\$C	\$D	\$E	\$F
0	\$00																
16	\$10																
32	\$20							•	•			•	•	•	•	•	•
48	\$30						•	•	•	•		•	•	•	•	•	•
64	\$40	•	•	•	•	•	•	•	•	•		•	•	•	•		
80	\$50																
96	\$60								•	•	•	•					•
112	\$70	•															
128	\$80																
144	\$90																
160	\$A0																•
176	\$B0	•															
192	\$C0																
208	\$D0									•		•	•	•	•		
224	\$E0																
240	\$F0																

Table 21: Integer BASIC Zero Page Usage

Decimal	Hex	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
		\$0	\$1	\$2	\$3	\$4	\$5	\$6	\$7	\$8	\$9	\$A	\$B	\$C	\$D	\$E	\$F
0	\$00																
16	\$10																
32	\$20																
48	\$30																
64	\$40											•	•	•	•		
80	\$50						•	•	•	•	•	•	•	•	•	•	•
96	\$60	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
112	\$70	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
128	\$80	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
144	\$90	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
160	\$A0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
176	\$B0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
192	\$C0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
208	\$D0	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
224	\$E0																
240	\$F0																



CHAPTER 5

INPUT/OUTPUT STRUCTURE

- 78 BUILT-IN I/O
- 79 PERIPHERAL BOARD I/O
- 80 PERIPHERAL CARD I/O SPACE
- 80 PERIPHERAL CARD ROM SPACE
- 81 I/O PROGRAMMING SUGGESTIONS
- 82 PERIPHERAL SLOT SCRATCHPAD RAM
- 83 THE CSW/KSW SWITCHES
- 84 EXPANSION ROM

The Apple's Input and Output functions fall into two basic categories: those functions which are performed on the Apple's board itself, and those functions which are performed by peripheral interface cards plugged into the Apple's eight peripheral "slots". Both of these functions communicate to the microprocessor and your programs via 4,096 locations in the Apple's memory map. This chapter describes the memory mapping and operation of the various input and output controls and functions; the hardware which executes these functions is described in the next chapter.

BUILT-IN I/O

Most of the Apple's inherent I/O facilities are described briefly in Chapter 1, "Approaching your Apple". For a short description of these facilities, please see that chapter.

The Apple's on-board I/O functions are controlled by 128 memory locations in the Apple's memory map, beginning at location $SC000$ and extending up through location $SC07F$ (decimal 49152 through 49279, or -16384 through -16257). Twenty-seven different functions share these 128 locations. Obviously, some functions are affected by more than one location: in some instances, as many as sixteen different locations all can perform exactly the same function. These 128 locations fall into five types: Data Inputs, Strobes, Soft Switches, Toggle Switches, and Flag Inputs.

Data Inputs. The only Data Input on the Apple board is a location whose value represents the current state of the Apple's built-in keyboard. The uppermost bit of this input is akin to the Flag Inputs (see below); the lower seven bits are the ASCII code of the key which was most recently pressed on the keyboard.

Flag Inputs. Most built-in input locations on the Apple are single-bit "flags". These flags appear in the highest (eighth) bit position in their respective memory locations. Flags have only two values: 'on' and 'off'. The setting of a flag can be tested easily from any language. A higher-level language can use a "PEEK" or similar command to read the value of a flag location: if the PEEKed value is greater than or equal to 128, then the flag is on; if the value is less than 128, the flag is off. Machine language programs can load the contents of a flag location into one of the 6502's internal registers (or use the BIT instruction) and branch depending upon the setting of the N (sign) flag. A BMI instruction will cause a branch if the flag is on, and a BPL instruction will cause a branch if the flag is off.

The Single-Bit (Pushbutton) inputs, the Cassette input, the Keyboard Strobe, and the Game Controller inputs are all of this type.

Strobe Outputs. The Utility Strobe, the Clear Keyboard Strobe, and the Game Controller Strobe are all controlled by memory locations. If your program reads the contents of one of these locations, then the function associated with that location will be activated. In the case of the Utility Strobe, pin 5 on the Game I/O connector will drop from +5 volts to 0 volts for a period of .98 microseconds, then rise back to +5 again; in the case of the Keyboard Strobe, the Keyboard's flag input (see above) will be turned off; and in the case of the Game Controller Strobe, all of the flag inputs of the Game Controllers will be turned off and their timing loops restarted.

Your program can also trigger the Keyboard and Game Controller Strobes by *writing* to their controlling locations, but you should not write to the Utility Strobe location. If you do, you will produce *two* .98 microsecond pulses, about 24.43 nanoseconds apart. This is due to the method in which the 6502 writes to a memory location: first it reads the contents of that location, then it

writes over them. This double pulse will go unnoticed for the Keyboard and Game Controller Strobes, but may cause problems if it appears on the Utility Strobe.

Toggle Switches. Two other strobe outputs are connected internally to two-state "flip-flops". Each time you read from the location associated with the strobe, its flip-flop will "toggle" to its other state. These toggle switches drive the Cassette Output and the internal Speaker. There is no practical way to determine the setting of an internal toggle switch. Because of the nature of the toggle switches, you should only read from their controlling locations, and not write to them (see Strobe Outputs, above).

Soft Switches. Soft Switches are two-position switches in which each side of the switch is controlled by an individual memory location. If you reference the location for one side of the switch, it will throw the switch that way; if you reference the location for the other side, it will throw the switch the other way. It sets the switch without regard to its former setting, and there is no way to determine the position a soft switch is in. You can safely write to soft switch controlling locations: two pulses are as good as one (see Strobe Outputs, above). The Annunciator outputs and all of the Video mode selections are controlled by soft switches.

The special memory locations which control the built-in Input and Output functions are arranged thus:

Table 22: Built-In I/O Locations

	S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	SA	SB	SC	SD	SE	SF
SC000	Keyboard Data Input															
SC010	Clear Keyboard Strobe															
SC020	Cassette Output Toggle															
SC030	Speaker Toggle															
SC040	Utility Strobe															
SC050	gr	tx	nomix	mix	pri	sec	lores	hires	an0	an1		an2		an3		
SC060	cin	pb1	pb2	pb3	gc0	gc1	gc2	gc3	repeat SC060-SC067							
SC070	Game Controller Strobe															

Key to abbreviations:

gr	Set GRAPHICS mode	tx	Set TEXT mode
nomix	Set all text or graphics	mix	Mix text and graphics
pri	Display primary page	sec	Display secondary page
lores	Display Low-Res Graphics	hires	Display Hi-Res Graphics
an	Annunciator outputs	pb	Pushbutton inputs
gc	Game Controller inputs	cin	Cassette Input

PERIPHERAL BOARD I/O

Along the back of the Apple's main board is a row of eight long "slots", or Peripheral Connectors. Into seven of these eight slots, you can plug any of many Peripheral Interface boards designed especially for the Apple. In order to make the peripheral cards simpler and more versatile, the Apple's circuitry has allocated a total of 280 byte locations in the memory map for each

of seven slots. There is also a 2K byte "common area", which all peripheral cards in your Apple can share.

Each slot on the board is individually numbered, with the leftmost slot called "Slot 0" and the rightmost called "Slot 7". Slot 0 is special: it is meant for RAM, ROM, or Interface expansion. All other slots (1 through 7) have special control lines going to them which are active at different times for different slots.

PERIPHERAL CARD I/O SPACE

Each slot is given sixteen locations beginning at location SC080 for general input and output purposes. For slot 0, these sixteen locations fall in the memory range SC080 through SC08F; for slot 1, they're in the range SC090 through SC09F, *et cetera*. Each peripheral card can use these locations as it pleases. Each peripheral card can determine when it is being selected by listening to pin 41 (called DEVICE SELECT) on its peripheral connector. Whenever the voltage on this pin drops to 0 volts, the address which the microprocessor is calling is somewhere in that peripheral card's 16-byte allocation. The peripheral card can then look at the bottom four address lines to determine which of its sixteen addresses is being called.

Table 23: Peripheral Card I/O Locations

	S0	S1	S2	S3	S4	S5	S6	S7	S8	S9	SA	SB	SC	SD	SE	SF
SC080										0						
SC090										1						
SC0A0										2						
SC0B0										3						
SC0C0										4						
SC0D0										5						
SC0E0										6						
SC0F0										7						

PERIPHERAL CARD ROM SPACE

Each peripheral slot also has reserved for it one 256-byte page of memory. This page is usually used to house 256 bytes of ROM or Programmable ROM (PROM) memory, which contains driving programs or subroutines for the peripheral card. In this way, the peripheral interface cards can be "intelligent"; they contain their own driving software; you do not need to load separate programs in order to use the interface cards.

The page of memory reserved for each peripheral slot has the page number SCn, where n is the slot number. Slot 0 does not have a page reserved for it, so you cannot use most Apple interface cards in that slot. The signal on Pin 1 (called I/O SELECT) of each peripheral slot will become active (drop from +5 volts to ground) when the microprocessor is referencing an address within that slot's reserved page. Peripheral cards can use this signal to enable their PROMs, and use the lower eight address lines to address each byte in the PROM.

Table 24: Peripheral Card PROM Locations

	S00	S10	S20	S30	S40	S50	S60	S70	S80	S90	SA0	SB0	SC0	SD0	SE0	SF0
SC100													1			
SC200													2			
SC300													3			
SC400	PROM space for slot number												4			
SC500													5			
SC600													6			
SC700													7			

I/O PROGRAMMING SUGGESTIONS

The programs in peripheral card PROMs should be portable; that is, they should be able to function correctly regardless of where they are placed in the Apple's memory map. They should contain no absolute references to themselves. They should perform all Jumps with conditional or forced branches.

Of course, you can fill a peripheral card PROM with subroutines which are *not* portable, and your only loss would be that the peripheral card would be slot-dependent. If you're cramped for space in a peripheral card PROM, you can save many bytes by making the subroutines slot-dependent.

The first thing that a subroutine in a peripheral card PROM should do is to save the values of *all* of the 6502's internal registers. There is a subroutine called IOSAVE in the Apple's Monitor ROM which does just this. It saves the contents of all internal registers in memory locations \$45 through \$49, in the order A-X-Y-P-S. This subroutine starts at location \$FF4A. A companion subroutine, called IORESTORE, restores *all* of the internal registers from these storage locations. You should call this subroutine, located at \$FF3F, before your PROM subroutine finishes.

Most single-character input and output is passed in the 6502's Accumulator. During output, the character to be displayed is in the Accumulator, with its high bit set. During input, your subroutine should pass the character received from the input device in the Accumulator, also with its high bit set.

A program in a peripheral card's PROM can determine which slot the card is plugged into by executing this sequence of instructions:

```

0300 - 20 4A FF JSR $FF4A
0303 - 78 SEI
0304 - 20 58 FF JSR $FF58
0307 - BA TSX
0308 - BD 00 01 LDA $0100,X
030B - 8D F8 07 STA $07F8
030E - 29 0F AND #$0F
0310 - A8 TAY

```

After a program executes these steps, the slot number which its card is in will be stored in the 6502's Y index register in the format \$0n, where *n* is the slot number. A program in the ROM can further process this value by shifting it four bits to the left, to obtain \$n0.

```

0311 - 98 TYA

```

0312 -	0A	ASL
0313 -	0A	ASL
0314 -	0A	ASL
0315 -	0A	ASL
0316 -	AA	TAX

A program can use this number in the X index register with the 6502's indexed addressing mode to refer to the sixteen I/O locations reserved for each card. For example, the instruction

```
0317 - BD 80 C0 LDA SC080,X
```

will load the 6502's accumulator with the contents of the first I/O location used by the peripheral card. The address SC080 is the *base address* for the first location used by all eight peripheral slots. The address SC081 is the base address for the second I/O location, and so on. Here are the base addresses for all sixteen I/O locations on each card:

Table 25: I/O Location Base Addresses

Base Address	Slot							
	0	1	2	3	4	5	6	7
SC080	SC080	SC090	SC0A0	SC0B0	SC0C0	SC0D0	SC0E0	SC0F0
SC081	SC081	SC091	SC0A1	SC0B1	SC0C1	SC0D1	SC0E1	SC0F1
SC082	SC082	SC092	SC0A2	SC0B2	SC0C2	SC0D2	SC0E2	SC0F2
SC083	SC083	SC093	SC0A3	SC0B3	SC0C3	SC0D3	SC0E3	SC0F3
SC084	SC084	SC094	SC0A4	SC0B4	SC0C4	SC0D4	SC0E4	SC0F4
SC085	SC085	SC095	SC0A5	SC0B5	SC0C5	SC0D5	SC0E5	SC0F5
SC086	SC086	SC096	SC0A6	SC0B6	SC0C6	SC0D6	SC0E6	SC0F6
SC087	SC087	SC097	SC0A7	SC0B7	SC0C7	SC0D7	SC0E7	SC0F7
SC088	SC088	SC098	SC0A8	SC0B8	SC0C8	SC0D8	SC0E8	SC0F8
SC089	SC089	SC099	SC0A9	SC0B9	SC0C9	SC0D9	SC0E9	SC0F9
SC08A	SC08A	SC09A	SC0AA	SC0BA	SC0CA	SC0DA	SC0EA	SC0FA
SC08B	SC08B	SC09B	SC0AB	SC0BB	SC0CB	SC0DB	SC0EB	SC0FB
SC08C	SC08C	SC09C	SC0AC	SC0BC	SC0CC	SC0DC	SC0EC	SC0FC
SC08D	SC08D	SC09D	SC0AD	SC0BD	SC0CD	SC0DD	SC0ED	SC0FD
SC08E	SC08E	SC09E	SC0AE	SC0BE	SC0CE	SC0DE	SC0EE	SC0FE
SC08F	SC08F	SC09F	SC0AF	SC0BF	SC0CF	SC0DF	SC0EF	SC0FF

I/O Locations

PERIPHERAL SLOT SCRATCHPAD RAM

Each of the eight peripheral slots has reserved for it 8 locations in the Apple's RAM memory. These 64 locations are actually in memory pages S04 through S07, inside the area reserved for the Text and Low-Resolution Graphics video display. The contents of these locations, however, are *not* displayed on the screen, and their contents are not changed by normal screen operations.* The peripheral cards can use these locations for temporary storage of data while the cards are in operation. These "scratchpad" locations have the following addresses:

* See "But Soft...", page 31.

Base Address	Slot Number						
	1	2	3	4	5	6	7
S0478	S0479	S047A	S047B	S047C	S047D	S047E	S047F
S04F8	S04F9	S04FA	S04FB	S04FC	S04FD	S04FE	S04FF
S0578	S0579	S057A	S057B	S057C	S057D	S057E	S057F
S05F8	S05F9	S05FA	S05FB	S05FC	S05FD	S05FE	S05FF
S0678	S0679	S067A	S067B	S067C	S067D	S067E	S067F
S06F8	S06F9	S06FA	S06FB	S06FC	S06FD	S06FE	S06FF
S0778	S0779	S077A	S077B	S077C	S077D	S077E	S077F
S07F8	S07F9	S07FA	S07FB	S07FC	S07FD	S07FE	S07FF

Slot 0 does not have any scratchpad RAM addresses reserved for it. The Base Address locations are used by Apple DOS 3.2 and are also shared by all peripheral cards. Some of these locations have dedicated functions: location S7F8 holds the slot number (in the format SC*n*) of the peripheral card which is currently active, and location S5F8 holds the slot number of the disk controller card from which any active DOS was booted.

By using the slot number S0*n*, derived in the program example above, a subroutine can directly reference any of its eight scratchpad locations:

```

031A-  B9 78 04  LDA  S0478,Y
031D-  99 F8 04  STA  S04F8,Y
0320-  B9 78 05  LDA  S0578,Y
0323-  99 F8 05  STA  S05F8,Y
0326-  B9 78 06  LDA  S0678,Y
0329-  99 F8 06  STA  S06F8,Y
032C-  B9 78 07  LDA  S0778,Y
032F-  99 F8 07  STA  S07F8,Y

```

THE CSW/KSW SWITCHES

The pair of locations S36 and S37 (decimal 54 and 55) is called CSW, for "Character output Switch". Individually, location S36 is called CSWL (CSW Low) and location S37 is called CSWH (CSW High). This pair of locations holds the address of the subroutine which the Apple is currently using for single-character output. This address is normally SFDF0, the address of the COUT subroutine (see page 30). The Monitor's PRINTER (CTRL P) command, and the BASIC command PR#, can change this address to be the address of a subroutine in a PROM on a peripheral card. Both of these commands put the address SC*n*00 into this pair of locations, where *n* is the slot number given in the command. This is the address of the first location in whatever PROM happens to be on the peripheral card plugged into that slot. The Apple will then call this subroutine every time it wishes to output one character. This subroutine can use the instruction sequences given above to find its slot number and use the I/O and RAM scratchpad locations for its slot. When it is finished, it can either execute an RTS (ReTurn from Subroutine) instruction, to return to the program or language which is sending the output, or it can jump to the COUT subroutine at location SFDF0, to display the character on the screen and then return to the program which is producing output.

Similarly, locations S38 and 39 (decimal 56 and 57), called KSWL and KSWH separately or KSW

(Keyboard input SWiCh) together, hold the address of the subroutine the Apple is currently using for single-character input. This address is normally \$FD1B, the address of the KEYIN subroutine. The Monitor's KEYBOARD command (**CTRL K**) and the BASIC command IN# both change this address to \$Cn00, again with *n* the slot number given in the command. The Apple will call the subroutine at the beginning of the PROM on the peripheral card in this slot whenever it wishes to get a single character from the input device. The subroutine should place the input character into the 6502's accumulator and ReTurn from Subroutine (RTS). The subroutine should set the high bit of the character before it returns.

The subroutines in a peripheral card's PROM can change the addresses in the CSW and KSW switches to point to places in the PROM other than the very beginning. For example, a certain PROM could begin with a segment of code to determine what slot it is in and do some initialization, and then jump in to the actual character handling subroutine. As part of its initialization sequence, it could change KSW or CSW (whichever is applicable) to point directly to the beginning of the character handling subroutine. Then the next time the Apple asks for input or output from that card, the handling subroutines will skip the already-done initialization sequence and go right in to the task at hand. This can save time in speed-sensitive situations.

A peripheral card can be used for both input and output if its PROM has separate subroutines for the separate functions and changes CSW and KSW accordingly. The initialization sequence in a peripheral card PROM can determine if it is being called for input or output by looking at the high parts of the CSW and KSW switches. Whichever switch contains \$Cn is currently calling that card to perform its function. If both switches contain \$Cn, then your subroutine should assume that it is being called for output.

EXPANSION ROM

The 2K memory range from location \$C800 to \$CFFF is reserved for a 2K ROM or PROM on a peripheral card, to hold large programs or driving subroutines. The expansion ROM space also has the advantage of being absolutely located in the Apple's memory map, which gives you more freedom in writing your interface programs.

This PROM space is available to all peripheral slots, and more than one card in your Apple can have an expansion ROM. However, only one expansion ROM can be active at one time.

Each peripheral card's expansion ROM should have a flip-flop to enable it. This flip-flop should be turned "on" by the DEVICE SELECT signal (the one which enables the 256-byte PROM). This means that the expansion ROM on any card will be partially enabled after you first reference the card it is on. The other enable to the expansion ROM should be the I/O STROBE line, pin 20 on each peripheral connector. This line becomes active whenever the Apple's microprocessor is referencing a location inside the expansion ROM's domain. When this line becomes active, and the aforementioned flip-flop has been turned "on", then the Apple is referencing the expansion ROM on this particular board (see figure 8).

A peripheral card's 256-byte PROM can gain sole access to the expansion ROM space by referring to location \$CFFF in its initialization subroutine. This location is a special location, and all peripheral cards should recognize it as a signal to turn their flip-flops "off" and disable their expansion ROMs. Of course, this will also disable the expansion ROM on the card which is trying to grab the ROM space, but the ROM will be enabled again when the microprocessor gets another instruction from the 256-byte driving PROM. Now the expansion ROM is enabled, and its space is clear. The driving subroutines can then jump directly into the programs in the ROM, where




Figure 8. Expansion ROM Enable Circuit

they can enjoy the 2K of unobstructed, absolutely located memory space:

0332 -	2C FF CF	BIT	SCFF
0335 -	4C 00 C8	JMP	SC800

It is possible to save circuitry (at the expense of ROM space) on the peripheral card by not fully decoding the special location address, SCFF. In fact, if you can afford to lose the last 256 bytes of your ROM space, the following simple circuit will do just fine:




Figure 9. SCFFX Decoding



CHAPTER 6

HARDWARE CONFIGURATION

- 88 THE MICROPROCESSOR
- 90 SYSTEM TIMING
- 92 POWER SUPPLY
- 94 ROM MEMORY
- 95 RAM MEMORY
- 96 THE VIDEO GENERATOR
- 97 VIDEO OUTPUT JACKS
- 98 BUILT-IN I/O
- 99 "USER 1" JUMPER
- 100 THE GAME I/O CONNECTOR
- 100 THE KEYBOARD
- 102 KEYBOARD CONNECTOR
- 103 CASSETTE INTERFACE JACKS
- 104 POWER CONNECTOR
- 105 SPEAKER
- 105 PERIPHERAL CONNECTORS

THE MICROPROCESSOR

The 6502 Microprocessor

Model:	MCS6502/SY6502
Manufactured by:	MOS Technology, Inc. Synertek Rockwell
Number of instructions:	56
Addressing modes:	13
Accumulators:	1 (A)
Index registers:	2 (X,Y)
Other registers:	Stack pointer (S) Processor status (P)
Stack:	256 bytes, fixed
Status flags:	N (sign) C (carry) V (overflow)
Other flags:	I (Interrupt disable) D (Decimal arithmetic) B (Break)
Interrupts:	2 (IRQ, NMI)
Resets:	1 (RES)
Addressing range:	2^{16} (64K) locations
Address bus:	16 bits, parallel
Data bus:	8 bits, parallel Bidirectional
Voltages:	+5 volts
Power dissipation:	.25 watt
Clock frequency:	1.023MHz

The microprocessor gets its main timing signals, $\Phi 0$ and $\Phi 1$, from the timing circuits described below. These are complimentary 1.023MHz clock signals. Various manuals, including the MOS

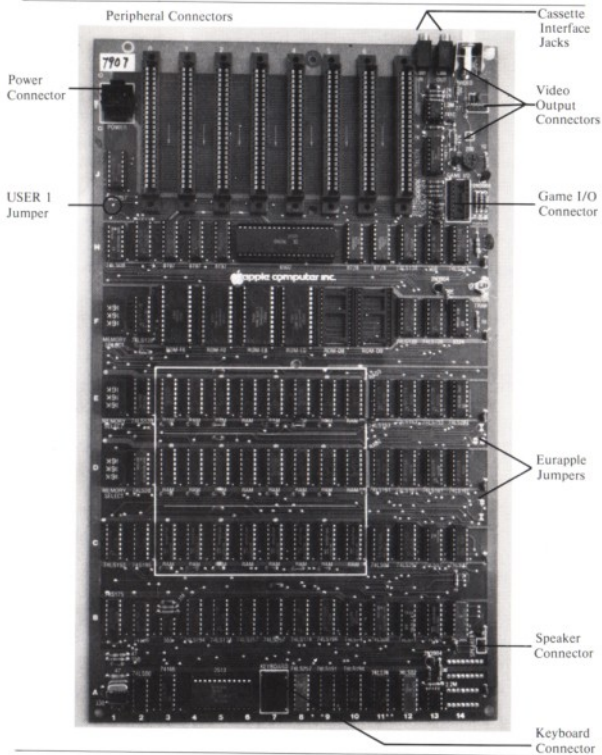


Figure 10. The Apple Main Board

Technology Hardware manual, use the designation $\Phi 2$ for the Apple's $\Phi 0$ clock.

The microprocessor uses its address and data buses only during the time period when $\Phi 0$ is active. When $\Phi 0$ is low, the microprocessor is doing internal operations and does not need the data and address buses.

The microprocessor has a 16-bit address bus and an 8-bit bidirectional data bus. The Address bus lines are buffered by three 8T97 three-state buffers at board locations H3, H4, and H5. The address lines are held open only during a DMA cycle, and are active at all other times. The address on the address bus becomes valid about 300ns after $\Phi 1$ goes high and remains valid through all of $\Phi 0$.

The data bus is buffered through two 8T28 bidirectional three-state buffers at board locations H10 and H11. Data from the microprocessor is put onto the bus about 300ns after $\Phi 1$ and the READ/WRITE signal (R/W) both drop to zero. At all other times, the microprocessor is either listening to or ignoring the data bus.

The RDY, $\overline{\text{RES}}$, $\overline{\text{IRQ}}$, and $\overline{\text{NMI}}$ lines to the microprocessor are all held high by 3.3K Ohm resistors to +5v. These lines also appear on the peripheral connectors (see page 105).

The SET OVERFLOW (SO) line to the microprocessor is permanently tied to ground.

SYSTEM TIMING

Table 27: Timing Signal Descriptions

14M:	Master Oscillator output, 14.318 MHz. All timing signals are derived from this signal.
7M:	Intermediate timing signal, 7.159 MHz.
COLOR REF:	Color reference frequency, 3.580MHz. Used by the video generation circuitry.
$\Phi 0$ ($\Phi 2$):	Phase 0 system clock, 1.023MHz, compliment to $\Phi 1$.
$\Phi 1$:	Phase 1 system clock, 1.023 MHz, compliment to $\Phi 0$.
Q3:	A general-purpose timing signal, twice the frequency of the system clocks, but asymmetrical.

All peripheral connectors get the timing signals 7M, $\Phi 0$, $\Phi 1$, and Q3. The timing signals 14M and COLOR REF are not available on the peripheral connectors.

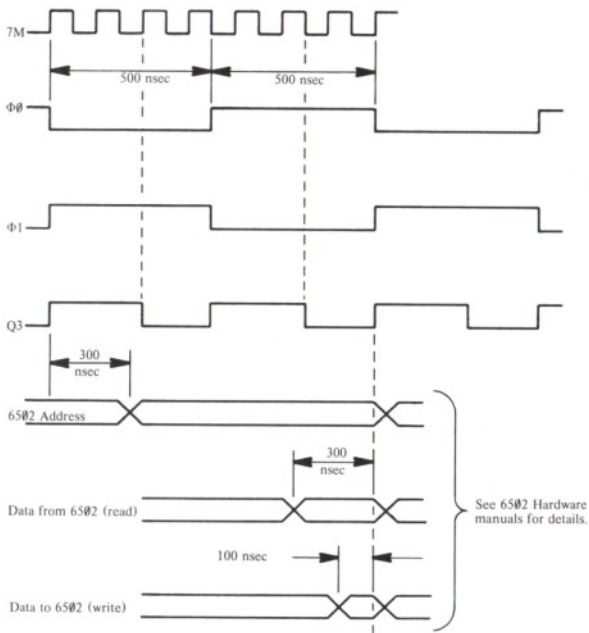


Figure 11. Timing Signals and Relationships

POWER SUPPLY

The Apple Power Supply (U. S. Patent #4,130,862)

Input voltage:	107 VAC to 132 VAC, or 214 VAC to 264 VAC (switch selectable*)
Supply voltages:	+5.0 +11.8 -12.0 -5.2
Power Consumption:	60 watts max. (full load) 79 watts max. (intermittent**)
Full load power output:	+5v: 2.5 amp -5v: 250ma +12v: 1.5 amp (~ 2.5 amp intermittent**) -12v: 250ma
Operating temperature:	55c (131° Farenheit)

The Apple Power Supply is a high-voltage "switching" power supply. While most other power supplies use a large transformer with many windings to convert the input voltage into many lesser voltages and then rectify and regulate these lesser voltages, the Apple power supply first converts the AC line voltage into a DC voltage, and then uses this DC voltage to drive a high-frequency oscillator. The output of this oscillator is fed into a small transformer with many windings. The voltages on the secondary windings are then regulated to become the output voltages.

The +5 volt output voltage is compared to a reference voltage, and the difference error is fed back into the oscillator circuit. When the power supply's output starts to move out of its tolerances, the frequency of the oscillator is altered and the voltages return to their normal levels.

If by chance one of the output voltages of the power supply is short-circuited, a feedback circuit in the power supply stops the oscillator and cuts all output circuits. The power supply then pauses for about 1/2 second and then attempts to restart the oscillations. If the output is still shorted, it will stop and wait again. It will continue this cycle until the short circuit is removed or the power is turned off.

If the output connector of the power supply is disconnected from the Apple board, the power supply will notice this "no load" condition and effectively short-circuit itself. This activates the protection circuits described above, and cuts all power output. This prevents damage to the power supply's internals.

* The voltage selector switch is not present on some Apples.

** The power supply can run 20 minutes with an intermittent load if followed by 10 minutes at normal load without damage.

If one of the output voltages leaves its tolerance range, due to any problem either within or external to the power supply, it will again shut itself down to prevent damage to the components on the Apple board. This insures that all voltages will either be correct and in proportion, or they will be shut off.

When one of the above fault conditions occurs, the internal protection circuits will stop the oscillations which drive the transformer. After a short while, the power supply will perform a restart cycle, and attempt to oscillate again. If the fault condition has not been removed, the supply will again shut down. This cycle can continue infinitely without damage to the power supply. Each time the oscillator shuts down and restarts, its frequency passes through the audible range and you can hear the power supply squeal and squeak. Thus, when a fault occurs, you will hear a steady "click click click" emanating from the power supply. This is your warning that something is wrong with one of the voltage outputs.

Under no circumstances should you apply more than 140 VAC to the input of the transformer (or more than 280 VAC when the supply's switch is in the 220V position). Permanent damage to the supply will result.

You should connect your Apple's power supply to a properly grounded 3-wire outlet. It is very important that the Apple be connected to a good earth ground.

CAUTION: There are dangerous high voltages inside the power supply's case. Much of the internal circuitry is *not* isolated from the power line, and special equipment is needed for service. **DO NOT ATTEMPT TO REPAIR YOUR POWER SUPPLY!** Send it to your Apple dealer for service.

ROM MEMORY

The Apple can support up to six 2K by 8 mask programmed Read-Only Memory ICs. One of these six ROMs is enabled by a 74LS138 at location F12 on the Apple's board whenever the microprocessor's address bus holds an address between \$D000 and \$FFFF. The eight Data outputs of all ROMs are connected to the microprocessor's data line buffers, and the ROM's address lines are connected to the buffers driving the microprocessor's address lines A0 through A10.

The ROMs have three "chip select" lines to enable them. CS1 and CS3, both active low, are connected together to the 74LS138 at location F12 which selects the individual ROMs. CS2, which is active high, is common to all ROMs and is connected to the INH (ROM Inhibit) line on the peripheral connectors. If a card in any peripheral slot pulls this line low, all ROMs on the Apple board will be disabled.

The ROMs are similar to type 2316 and 2716 programmable ROMs. However, the chip selects on most of these PROMs are of a different polarity, and they cannot be plugged directly into the Apple board.

A7	1	○	24	+5v
A6	2		23	A8
A5	3		22	A9
A4	4		21	$\overline{CS3}$
A3	5		20	$\overline{CS1}$
A2	6		19	A10
A1	7		18	CS2
A0	8		17	D7
D0	9		16	D6
D1	10		15	D5
D2	11		14	D4
Gnd	12		13	D3

Figure 13. 9316B ROM Pinout.

RAM MEMORY

The Apple uses 4K and 16K dynamic RAMs for its main RAM storage. This RAM memory is used by both the microprocessor and the video display circuitry. The microprocessor and the video display interleave their use of RAM: the microprocessor reads from or writes to RAM only during $\Phi 0$, and the video display refreshes its screen from RAM memory during $\Phi 1$.

The three 74LS153s at E11, E12, and E13, the 74LS283 at E14, and half of the 74LS257 at C12 make up the address multiplexer for the RAM memory. They take the addresses generated by the microprocessor and the video generator and multiplex them onto six RAM address lines. The other RAM addressing signals, \overline{RAS} and \overline{CAS} , and the signal which is address line 6 for 16K RAMs and \overline{CS} for 4K RAMs, are generated by the RAM select circuit. This circuit is made up of two 74LS139s at E2 and F2, half of a 74LS153 at location C1, one and a half 74LS257s at C12 and J1, and the three Memory Configuration blocks at D1, E1, and F1. This circuit routes signals to each row of RAM, depending upon what type of RAM (4K or 16K) is in that row.

The dynamic RAMs are refreshed automatically during $\Phi 1$ by the video generator circuitry. Since the video screen is always displaying at least a 1K range of memory, it needs to cycle through every location in that 1K range sixty times a second. It so happens that this action automatically refreshes every bit in all 48K bytes of RAM. This, in conjunction with the interleaving of the video and microprocessor access cycles, lets the video display, the microprocessor, and the RAM refresh run at full speed, without interfering with each other.

The data inputs to the RAMs are drawn directly off of the system's data bus. The data outputs of the RAMs are latched by two 74LS174s at board locations B5 and B8, and are multiplexed with the seven bits of data from the Apple's keyboard. These latched RAM outputs are fed directly to the video generator's character, color, and dot generators, and also back onto the system data bus by two 74LS257s at board locations B6 and B7.

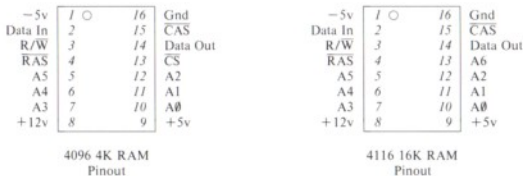


Figure 14. RAM Pinouts

THE VIDEO GENERATOR

There are 192 scan lines on the video screen, grouped in 24 lines of eight scan lines each. Each scan line displays some or all of the contents of forty bytes of memory.

The video generation circuitry derives its synchronization and timing signals from a chain of 74LS161 counters at board locations D11 through D14. These counters generate fifteen synchronization signals:

H0 H1 H2 H3 H4 H5
V0 V1 V2 V3 V4
VA VB VC

The "H" family of signals is the horizontal byte position on the screen, from 000000 to binary 100111 (decimal 39). The signals V0 through V4 are the vertical line position on the screen, from binary 00000 to binary 10111 (decimal 23). The VA, VB, and VC signals are the vertical scan line position within the vertical screen line, from binary 000 to 111 (decimal 7).

These signals are sent to the RAM address multiplexer, which turns them into the address of a single RAM location, dependent upon the setting of the video display mode soft switches (see below). The RAM multiplexer then sends this address to the array of RAM memory during $\Phi 1$. The latches which hold the RAM data sent by the RAM array reroute it to the video generation circuit. The 74LS283 at location rearranges the memory addresses so that the memory mapping on the screen is scrambled.

If the current area on the screen is to be a text character, then the video generator will route the lower six bits of the data to a type 2513 character generator at location A5. The seven rows in each character are scanned by the VA, VB, and VC signals, and the output of the character generator is serialized into a stream of dots by a 74166 at location A3. This bit stream is routed to an exclusive-OR gate, where it is inverted if the high bit of the data byte is off and either the sixth bit is low or the 555 timer at location B3 is high. This produces inverse and flashing characters. The text bit stream is then sent to the video selector/multiplexer (below).

If the Apple's video screen is in a graphics mode, then the data from RAM is sent to two 74LS194 shift registers at board locations B4 and B9. Here each nybble is turned into a serial data stream. These two data streams are also sent to the video selector/multiplexer.

The 74LS257 multiplexer at board position A8 selects between Color and High-Resolution graphics displays. The serialized Hi-res dot stream is delayed one-half clock cycle by the 74LS74 at location A11 if the high bit of the byte is set. This produces the alternate color set in High-Resolution graphics mode.

The video selector/multiplexer mixes the two data streams from the above sources according to the setting of the video screen soft switches. The 74LS194 at location A10 and the 74LS151 at A9 select one of the serial bit streams for text, color graphics, or high-resolution graphics depending upon the screen mode. The final serial output is mixed with the composite synchronization signal and the color burst signal generated by the video sync circuits, and sent to the video output connectors.

The video display soft switches, which control the video modes, are decoded as part of the Apple's on-board I/O functions. Logic gates in board locations B12, B13, B11, A12, and A11 are used to control the various video modes.

The color burst signal is created by logic gates at B12, B13, and C13 and is conditioned by R5, coil L1, C2, and trimmer capacitor C3. This trimmer capacitor can be tuned to vary the tint of colors produced by the video display. Transistor Q6 and its companion resistor R27 disable the color burst signal when the Apple is displaying text.

VIDEO OUTPUT JACKS

The video signal generated by the aforementioned circuitry is an NTSC compatible, similar to an EIA standard, positive composite video signal which can be fed to any standard closed-circuit or studio video monitor. This signal is available in three places on the Apple board:

RCA Jack. On the back of the Apple board, near the right edge, is a standard RCA phono jack. The sleeve of this jack is connected to the Apple's common ground and the tip is connected to the video output signal through a 200 Ohm potentiometer. This potentiometer can adjust the voltage on this connector from 0 to 1 volt peak.

Auxiliary Video Connector. On the right side of the Apple board near the back is a Molex KK100 series connector with four square pins, .25" tall, on .10" centers. This connector supplies the composite video output and two power supply voltages. This connector is illustrated in figure 15.

Table 28: Auxiliary Video Output Connector Signal Descriptions

Pin	Name	Description
1	GROUND	System common ground; 0 volts.
2	VIDEO	NTSC compatible positive composite video. Black level is about .75 volt, white level about 2.0 volt, sync tip level is 0 volts. Output level is not adjustable. This is not protected against short circuits.
3	+12v	+12 volt power supply.
4	-5v	-5 volt line from power supply.

Auxiliary Video Pin. This single metal wire-wrap pin below the Auxiliary Video Output Connector supplies the same video signal available on that connector. It is meant to be a connection point for Eurapple PAL/SECAM encoder boards.




Figure 15. Auxiliary Video Output Connector and Pin.

BUILT-IN I/O

The Apple's built-in I/O functions are mapped into 128 memory locations beginning at `SC000`. On the Apple board, a 74LS138 at location F13 called the I/O selector decodes these 128 special addresses and enables the various functions.

The 74LS138 is enabled by another '138 at location H12 whenever the Apple's address bus contains an address between `SC000` and `SC0FF`. The I/O selector divides this 256-byte range into eight sixteen-byte ranges, ignoring the range `SC080` through `SC0FF`. Each output line of the '138 becomes active (low) when its associated 16-byte range is being referenced.

The "0" line from the I/O selector gates the data from the keyboard connector into the RAM data multiplexer.

The "1" line from the I/O selector resets the 74LS74 flip-flop at B10, which is the keyboard flag.

The "2" line toggles one half of a 74LS74 at location K13. The output of this flip-flop is connected through a resistor network to the tip of the cassette output jack.

The "3" line toggles the other half of the 74LS74 at K13. The output of this flip-flop is connected through a capacitor and Darlington amplifier circuit to the Apple's speaker connector on the right edge of the board under the keyboard.

The "4" line is connected directly to pin 5 of the Game I/O connector. This pin is the utility `C040 STROBE`.

The "5" line is used to enable the 74LS259 at location F14. This IC contains the soft switches for the video display and the Game I/O connector annunciator outputs. The switches are selected

by the address lines 1 through 3 and the setting of each switch is controlled by address line 0.

The "6" line is used to enable a 74LS251 eight-bit multiplexer at location H14. This multiplexer, when enabled, connects one of its eight input lines to the high order bit (bit 7) of the three-state system data bus. The bottom three address lines control which of the eight inputs the multiplexer chooses. Four of the mux's inputs come from a 553 quad timer at location H13. The inputs to this timer are the game controller pins on the Game I/O connector. Three other inputs to the multiplexer come from the single-bit (pushbutton) inputs on the Game I/O connector. The last multiplexer input comes from a 741 operational amplifier at location K13. The input to this op amp comes from the cassette input jack.

The "7" line from the I/O selector resets all four timers in the 553 quad timer at location H13. The four inputs to this timer come from an RC network made up of four 0.022 μ F capacitors, four 100 Ohm resistors, and the variable resistors in the game controllers attached to the Game I/O connector. The total resistance in each of the four timing circuits determines the timing characteristics of that circuit.

"USER 1" JUMPER

There is an unlabeled pair of solder pads on the Apple board, to the left of slot 0, called the "User 1" jumper. This jumper is illustrated in Photo 8. If you connect a wire between these two pads, then the USER 1 line on each peripheral connectors becomes active. If any peripheral card pulls this line low, *all* internal I/O decoding is disabled. The I/O SELECT and the DEVICE SELECT lines all go high and will remain high while USER 1 is low, regardless of the address on the address bus.

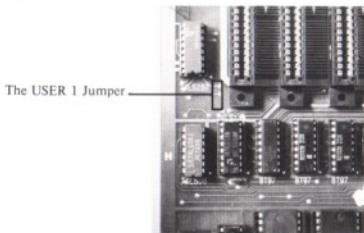


Photo 8. The USER 1 Jumper.

THE GAME I/O CONNECTOR

+5v	1	16	NC
PB0	2	15	AN0
PB1	3	14	AN1
PB2	4	13	AN2
$\overline{C040}$ STROBE	5	12	AN3
GC0	6	11	GC3
GC2	7	10	GC1
Gnd	8	9	NC

Figure 16.
Game I/O Connector Pinouts

Table 29: Game I/O Connector Signal Descriptions

Pin:	Name:	Description:
1	+5v	+5 volt power supply. Total current drain on this pin must be less than 100mA.
2-4	PB0-PB2	Single-bit (Pushbutton) inputs. These are standard 74LS series TTL inputs.
5	$\overline{C040}$ STROBE	A general-purpose strobe. This line, normally high, goes low during $\Phi0$ of a read or write cycle to any address from SC040 through SC04F. This is a standard 74LS TTL output.
6,7,10,11	GC0-GC3	Game controller inputs. These should each be connected through a 150K Ohm variable resistor to +5v.
8	Gnd	System electrical ground.
12-15	AN0-AN3	Annunciator outputs. These are standard 74LS series TTL outputs and must be buffered if used to drive other than TTL inputs.
9,16	NC	No internal connection.

THE KEYBOARD

The Apple's built-in keyboard is built around a MM5740 monolithic keyboard decoder ROM. The inputs to this ROM, on pins 4 through 12 and 22 through 31, are connected to the matrix of keyswitches on the keyboard. The outputs of this ROM are buffered by a 7404 and are connected to the Apple's Keyboard Connector (see below).

The keyboard decoder rapidly scans through the array of keys on the keyboard, looking for one which is pressed. This scanning action is controlled by the free-running oscillator made up of three sections of a 7400 at keyboard location U4. The speed of this oscillation is controlled by C6, R6, and R7 on the keyboard's printed-circuit board.

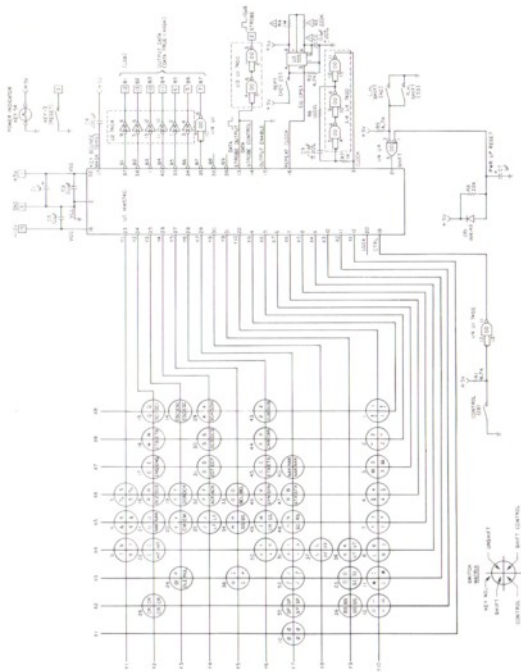


Figure 17. Schematic of the Apple Keyboard

The **REPT** key on the keyboard is connected to a 555 timer circuit at board location U3 on the keyboard. This chip and the capacitor and three resistors around it generate the 10Hz "REPEAT" signal. If the 220K Ohm resistor R3 is replaced with a resistor of a lower value, then the **REPT** key will repeat characters at a faster rate.

See Figure 17 for a schematic diagram of the Apple Keyboard.

KEYBOARD CONNECTOR

The data from the Apple's keyboard goes directly to the RAM data multiplexers and latches, the two 74LS257s at locations B6 and B7. The STROBE line on the keyboard connector sets a 74LS74 flip-flop at location B10. When the I/O selector activates its "Ø" line, the data which is on the seven inputs on the keyboard connector, and the state of the strobe flip-flop, are multiplexed onto the Apple's data bus.

Table 30: Keyboard Connector Signal Descriptions

Pin:	Name:	Description:
1	+5v	+5 volt power supply. Total current drain on this pin must be less than 120mA.
2	STROBE	Strobe output from keyboard. This line should be given a pulse at least 10 μ s long each time a key is pressed on the keyboard. The strobe can be of either polarity.
3	RESET	Microprocessor's RESET line. Normally high, this line should be pulled low when the RESET button is pressed.
4,9,16	NC	No connection.
5-7, 10-13	Data	Seven bit ASCII keyboard data input.
8	Gnd	System electrical ground.
15	-12v	-12 volt power supply. Keyboard should draw less than 50mA.

+5v	1	16	NC
STROBE	2	15	-12v
RESET	3	14	NC
NC	4	13	Data 1
Data 5	5	12	Data 0
Data 4	6	11	Data 3
Data 6	7	10	Data 2
Gnd	8	9	NC

Figure 18.
Keyboard Connector Pinouts

CASSETTE INTERFACE JACKS

The two female miniature phone jacks on the back of the Apple II board can connect your Apple to a normal home cassette tape recorder.

Cassette Input Jack: This jack is designed to be connected to the "Earphone" or "Monitor" output jacks on most tape recorders. The input voltage should be 1 volt peak-to-peak (nominal). The input impedance is 12K Ohms.

Cassette Output Jack: This jack is designed to be connected to the "Microphone" input on most tape recorders. The output voltage is 25mv into a 100 Ohm impedance load.

POWER CONNECTOR

This connector mates with the cable from the Apple Power Supply. This is an AMP #9-35028-1 six-pin male connector.

Table 31: Power Connector Pin Descriptions		
Pin:	Name:	Description:
1,2	Ground	Common electrical ground for Apple board.
3	+5v	+5.0 volts from power supply. An Apple with 48K of RAM and no peripherals draws ~1.5 amp from this supply.
4	+12v	+12.0 volts from power supply. An Apple with 48K of RAM and no peripherals draws ~400ma from this supply.
5	-12v	-12.0 volts from power supply. An Apple with 48K of RAM and no peripherals draws ~12.5ma from this supply.
6	-5v	-5.0 volts from power supply. An Apple with 48K of RAM and no peripherals draws ~0.0ma from this supply.




Figure 19. Power Connector

SPEAKER

The Apple's internal speaker is driven by half of a 74LS74 flip-flop through a Darlington amplifier circuit. The speaker connector is a Molex KK100 series connector, with two square pins, .25" tall, on .10" centers.

Table 32: Speaker Connector Signal Descriptions		
Pin:	Name:	Description:
1	SPKR	Speaker signal. This line will deliver about .5 watt into an 8 Ohm load.
2	+5v	+5 volt power supply.



Figure 20. Speaker Connector

PERIPHERAL CONNECTORS

The eight peripheral connectors along the back edge of the Apple's board are Winchester #21HW25C0-111 50-pin PC card edge connectors with pins on .10" centers. The pinout for these connectors is given in Figure 21, and the signal descriptions are given on the following pages.

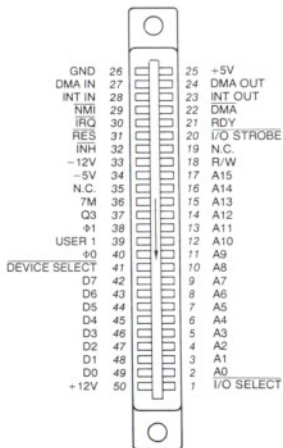


Figure 21. Peripheral Connector Pinout

Table 33: Peripheral Connector Signal Description

Pin:	Name:	Description:
1	I/O SELECT	This line, normally high, will become low when the microprocessor references page $\$Cn$, where n is the individual slot number. This signal becomes active during $\Phi0$ and will drive 10 LSTTL loads*. This signal is not present on peripheral connector 0.
2-17	A0-A15	The buffered address bus. The address on these lines becomes valid during $\Phi1$ and remains valid through $\Phi0$. These lines will each drive 5 LSTTL loads*.
18	R/ \overline{W}	Buffered Read/ $\overline{\text{Write}}$ signal. This becomes valid at the same time the address bus does, and goes high during a read cycle and low during a write. This line can drive up to 2 LSTTL loads*.
19	SYNC	On peripheral connector 7 <i>only</i> , this pin is connected to the video timing generator's SYNC signal.
20	$\overline{\text{I/O STROBE}}$	This line goes low during $\Phi0$ when the address bus contains an address between $\$C800$ and $\$CFFF$. This line will drive 4 LSTTL loads*.
21	RDY	The 6502's RDY input. Pulling this line low during $\Phi1$ will halt the microprocessor, with the address bus holding the address of the current location being fetched.
22	$\overline{\text{DMA}}$	Pulling this line low disables the 6502's address bus and halts the microprocessor. This line is held high by a 3K Ω resistor to +5v.
23	INT OUT	Daisy-chained interrupt output to lower priority devices. This pin is usually connected to pin 28 (INT IN).
24	DMA OUT	Daisy-chained DMA output to lower priority devices. This pin is usually connected to pin 22 (DMA IN).
25	+5v	+5 volt power supply. 500mA current is available for <i>all</i> peripheral cards.
26	GND	System electrical ground.

* Loading limits are for each peripheral card.

Table 33 (cont'd): Peripheral Connector Signal Description

Pin:	Name:	Description:
27	DMA IN	Daisy-chained DMA input from higher priority devices. Usually connected to pin 24 (DMA OUT).
26	INT IN	Daisy-chained interrupt input from higher priority devices. Usually connected to pin 23 (INT OUT).
29	$\overline{\text{NMI}}$	Non-Maskable Interrupt. When this line is pulled low the Apple begins an interrupt cycle and jumps to the interrupt handling routine at location \$3FB.
30	$\overline{\text{IRQ}}$	Interrupt ReQuest. When this line is pulled low the Apple begins an interrupt cycle only if the 6502's I (Interrupt disable) flag is not set. If so, the 6502 will jump to the interrupt handling subroutine whose address is stored in locations \$3FE and \$3FF.
31	$\overline{\text{RES}}$	When this line is pulled low the microprocessor begins a RESET cycle (see page 36).
32	$\overline{\text{INH}}$	When this line is pulled low, all ROMs on the Apple board are disabled. This line is held high by a 3K Ω resistor to +5v.
33	-12v	-12 volt power supply. Maximum current is 200mA for all peripheral boards.
34	-5v	-5 volt power supply. Maximum current is 200mA for all peripheral boards.
35	COLOR REF	On peripheral connector 7 <i>only</i> , this pin is connected to the 3.5MHz COLOR REFERENCE signal of the video generator.
36	7M	7MHz clock. This line will drive 2 LSTTL loads*.
37	Q3	2MHz asymmetrical clock. This line will drive 2 LSTTL loads*.
38	$\Phi 1$	Microprocessor's phase one clock. This line will drive 2 LSTTL loads*.
39	USER 1	This line, when pulled low, disables <i>all</i> internal I/O address decoding**.

* Loading limits are for each peripheral card.

** See page 99.

Table 33 (cont'd): Peripheral Connector Signal Description		
Pin:	Name:	Description:
40	$\Phi 0$	Microprocessor's phase zero clock. This line will drive 2 LSTTL loads*.
41	$\overline{\text{DEVICE SELECT}}$	This line becomes active (low) on each peripheral connector when the address bus is holding an address between $\text{SC}0n0$ and $\text{SC}0nF$, where n is the slot number plus 8. This line will drive 10 LSTTL loads*.
42-49	D0-D7	Buffered bidirectional data bus. The data on this line becomes valid 300ns into $\Phi 0$ on a write cycle, and should be stable no less than 100ns before the end of $\Phi 0$ on a read cycle. Each data line can drive one LSTTL load.
50	+12v	+12 volt power supply. This can supply up to 250mA total for all peripheral cards.

* Loading limits are for each peripheral card.

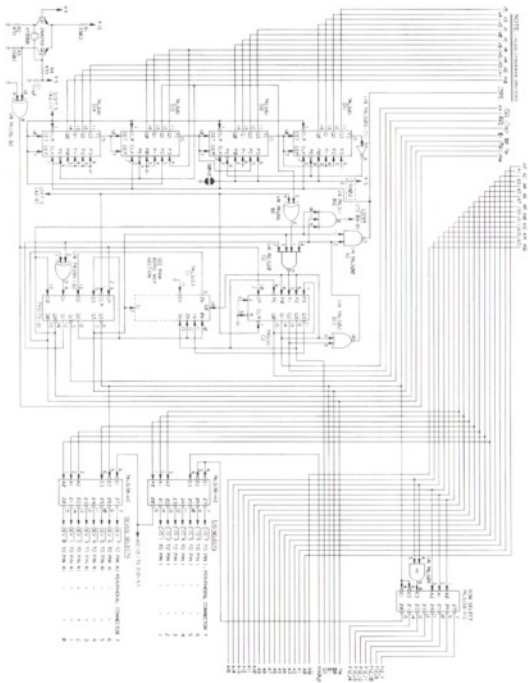


Figure 22-1. Schematic Diagram of the Apple II

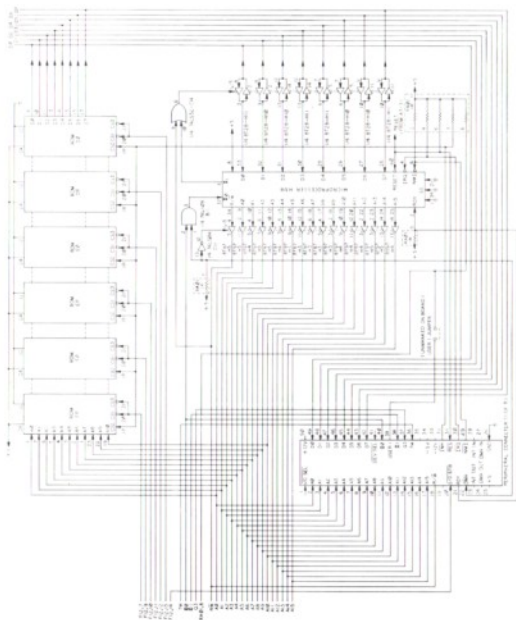


Figure 22-2. Schematic Diagram of the Apple II

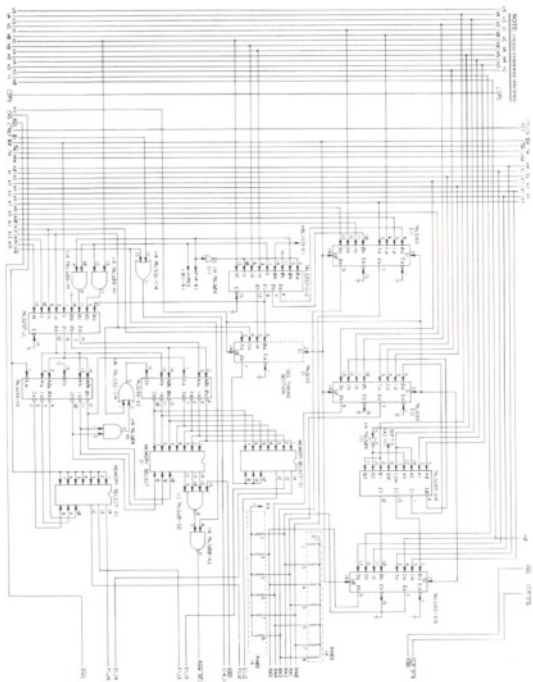


Figure 22-3. Schematic Diagram of the Apple II

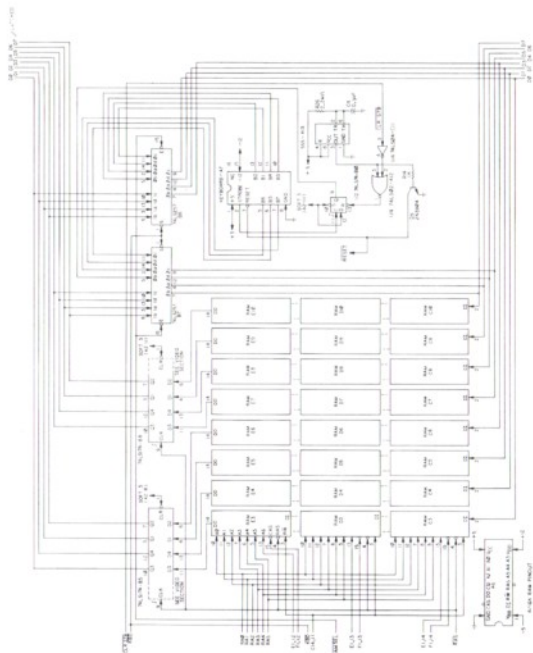


Figure 22-4. Schematic Diagram of the Apple II

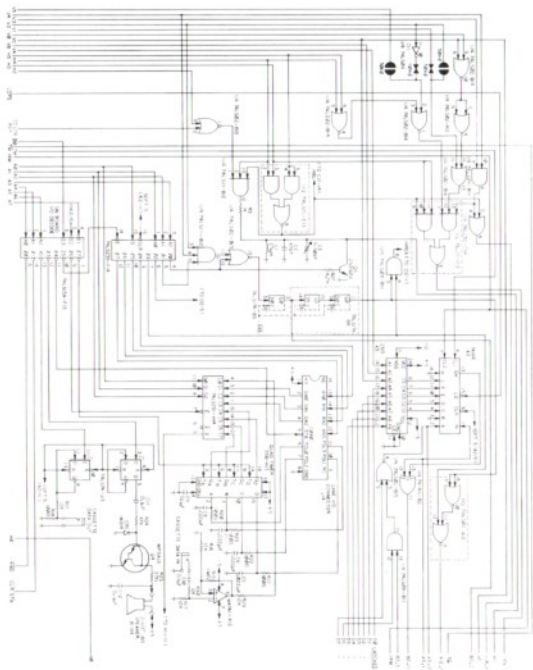


Figure 22-5. Schematic Diagram of the Apple II

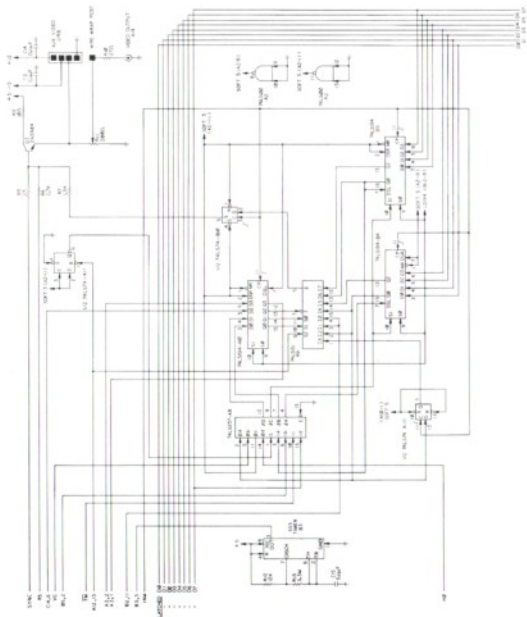


Figure 22-6. Schematic Diagram of the Apple II



APPENDIX A

THE 6502 INSTRUCTION SET

6502 MICROPROCESSOR INSTRUCTIONS

ADC	Add Memory to Accumulator with Carry	LDA	Load Accumulator with Memory
AND	"AND" Memory with Accumulator	LDX	Load Index X with Memory
ASL	Shift Left One Bit (Memory or Accumulator)	LDY	Load Index Y with Memory
BCC	Branch on Carry Clear	LSR	Shift Right one Bit (Memory or Accumulator)
BCS	Branch on Carry Set	NOP	No Operation
BEQ	Branch on Result Zero	ORA	"OR" Memory with Accumulator
BIT	Test Bits in Memory with Accumulator	PHA	Push Accumulator on Stack
BMI	Branch on Result Minus	PHP	Push Processor Status on Stack
BNE	Branch on Result not Zero	PLA	Pull Accumulator from Stack
BPL	Branch on Result Plus	PLP	Pull Processor Status from Stack
BRK	Force Break	ROL	Rotate One Bit Left (Memory or Accumulator)
BVC	Branch on Overflow Clear	ROR	Rotate One Bit Right (Memory or Accumulator)
BVS	Branch on Overflow Set	RTI	Return from Interrupt
CLC	Clear Carry Flag	RTS	Return from Subroutine
CLD	Clear Decimal Mode	SBC	Subtract Memory from Accumulator with Borrow
CLI	Clear Interrupt Disable Bit	SEC	Set Carry Flag
CLV	Clear Overflow Flag	SED	Set Decimal Mode
CMP	Compare Memory and Accumulator	SEI	Set Interrupt Disable Status
CPX	Compare Memory and Index X	STA	Store Accumulator in Memory
CPY	Compare Memory and Index Y	STX	Store Index X in Memory
DEC	Decrement Memory by One	STY	Store Index Y in Memory
DEX	Decrement Index X by One	TAX	Transfer Accumulator to Index X
DEY	Decrement Index Y by One	TAY	Transfer Accumulator to Index Y
EOR	"Exclusive-Or" Memory with Accumulator	TSX	Transfer Stack Pointer to Index X
INC	Increment Memory by One	TXA	Transfer Index X to Accumulator
INX	Increment Index X by One	TXS	Transfer Index X to Stack Pointer
INY	Increment Index Y by One	TYA	Transfer Index Y to Accumulator
JMP	Jump to New Location		
JSR	Jump to New Location Saving Return Address		

THE FOLLOWING NOTATION APPLIES TO THIS SUMMARY:

A	Accumulator
X, Y	Index Registers
M	Memory
C	Borrow
P	Processor Status Register
S	Stack Pointer
✓	Change
—	No Change
+	Add
∧	Logical AND
-	Subtract
∨	Logical Exclusive Or
↓	Transfer From Stack
↑	Transfer To Stack
→	Transfer To
←	Transfer To
V	Logical OR
PC	Program Counter
PCH	Program Counter High
PCL	Program Counter Low
OPER	Operand
#	Immediate Addressing Mode

FIGURE 1. ASL-SHIFT LEFT ONE BIT OPERATION




FIGURE 2. ROTATE ONE BIT LEFT (MEMORY OR ACCUMULATOR)






FIGURE 3.



NOTE 1: BIT — TEST BITS

Bit 6 and 7 are transferred to the status register. If the result of A ∨ M is zero then Z=1, otherwise Z=0.

PROGRAMMING MODEL

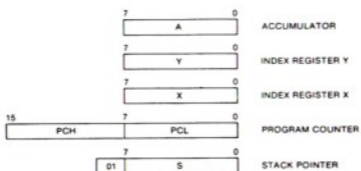

INSTRUCTION CODES

Name Description	Operation	Addressing Mode	Assembly Language Form	HEX Op Code	No. Bytes	* Status Reg # Z C I S V
ADC Add memory to accumulator with carry	A-M-C → A-C	Immediate	ADC #Oper	89	2	√√√---√
		Zero Page	ADC Oper	85	2	
		Zero Page,X	ADC Oper,X	75	2	
		Absolute	ADC Oper	60	3	
		Absolute,X	ADC Oper,X	70	3	
		Absolute,Y	ADC Oper,Y	79	3	
		(Indirect),X	ADC (Oper),X	61	2	
(Indirect),Y	ADC (Oper),Y	71	2			
AND "AND" memory with accumulator	A-M → A	Immediate	AND #Oper	29	2	√√-----
		Zero Page	AND Oper	25	2	
		Zero Page,X	AND Oper,X	35	2	
		Absolute	AND Oper	20	3	
		Absolute,X	AND Oper,X	30	3	
		Absolute,Y	AND Oper,Y	39	3	
		(Indirect),X	AND (Oper),X	21	2	
(Indirect),Y	AND (Oper),Y	31	2			
ASL Shift left one bit (Memory or Accumulator)	(See Figure 1)	Accumulator	ASL A	0A	1	√√√-----
		Zero Page	ASL Oper	06	2	
		Zero Page,X	ASL Oper,X	16	2	
		Absolute	ASL Oper	0E	3	
		Absolute,X	ASL Oper,X	1E	3	
BCC Branch on carry clear	Branch on C=0	Relative	BCC Oper	90	2	-----
BCS Branch on carry set	Branch on C=1	Relative	BCS Oper	80	2	-----
BEQ Branch on result zero	Branch on Z=1	Relative	BEQ Oper	F0	2	-----
BIT Test bits in memory with accumulator	A-M, M _n → N, M _n → V	Zero Page	BIT* Oper	24	2	M _n √-----M ₆
		Absolute	BIT* Oper	2C	3	
BMI Branch on result minus	Branch on N=1	Relative	BMI Oper	30	2	-----
BNE Branch on result not zero	Branch on Z=0	Relative	BNE Oper	00	2	-----
BPL Branch on result plus	Branch on N=0	Relative	BPL Oper	10	2	-----
BRK Force Break	Forced Interrupt PC-2 & P &#	Implied	BRK*	00	1	---1---
BVC Branch on overflow clear	Branch on V=0	Relative	BVC Oper	50	2	-----

* M₇, M₆, and M₅ are transferred to the status register if the result of A & M_n.

* Note 2: A BBR compare cannot be masked by setting

then M₇, 1 otherwise Z = 0

Name Description	Operation	Addressing Mode	Assembly Language Form	HEX OP Code	No. Bytes	"P" Status Reg. N Z C I O V
BVS Branch on overflow set	Branch on V=1	Relative	BVS Oper	70	2	-----
CLC Clear carry flag	0 → C	Implied	CLC	18	1	---0---
CLD Clear decimal mode	0 → D	Implied	CLD	0B	1	-0-----
CLI	0 → I	Implied	CLI	5B	1	---0---
CLV Clear overflow flag	0 → V	Implied	CLV	8B	1	0-----
CMP Compare memory and accumulator	A - M	Immediate Zero Page Zero Page, X Absolute Absolute, X Absolute, Y (Indirect, X) (Indirect, Y)	CMP #Oper CMP Oper CMP Oper, X CMP Oper CMP Oper, X CMP Oper, Y CMP (Oper, X) CMP (Oper, Y)	C9 C5 D5 CD DD D9 C1 D1	2 2 2 3 3 3 2 2	√√√---
CPX Compare memory and index X	X - M	Immediate Zero Page Absolute	CPX #Oper CPX Oper CPX Oper	E0 E4 EC	2 2 3	√√√---
CPY Compare memory and index Y	Y - M	Immediate Zero Page Absolute	CPY #Oper CPY Oper CPY Oper	C0 C4 CC	2 2 3	√√√---
DEC Decrement memory by one	M - 1 → M	Zero Page Zero Page, X Absolute Absolute, X	DEC Oper DEC Oper, X DEC Oper DEC Oper, X	C6 D6 CE DE	2 2 3 3	√√-----
DEX Decrement index X by one	X - 1 → X	Implied	DEX	CA	1	√√-----
DEY Decrement index Y by one	Y - 1 → Y	Implied	DEY	8A	1	√√-----

Name Description	Operation	Addressing Mode	Assembly Language Form	HEX OP Code	No. Bytes	'F' Status Reg. N Z C I S V
EOR "Exclusive-Or" memory with accumulator	A V M → A	Immediate Zero Page Zero Page,X Absolute Absolute,X Absolute,Y (Indirect,X) (Indirect),Y	EOR #Oper EOR Oper EOR Oper,X EOR Oper EOR Oper,X EOR Oper,Y EOR (Oper,X) EOR (Oper),Y	49 45 55 4D 5D 59 41 51	2 2 2 3 3 3 2 2	√'-----
INC Increment memory by one	M - 1 → M	Zero Page Zero Page,X Absolute Absolute,X	INC Oper INC Oper,X INC Oper INC Oper,X	E6 F6 EE FE	2 2 3 3	√√-----
INX Increment index X by one	X - 1 → X	Implied	INX	E8	1	√√-----
INY Increment index Y by one	Y - 1 → Y	Implied	INY	CB	1	√√-----
JMP Jump to new location	(PC-1) → PCL (PC-2) → PCH	Absolute Indirect	JMP Oper JMP (Oper)	4C 6C	3 3	-----
JSR Jump to new location saving return address	PC-2 ↓ (PC-1) → PCL (PC-2) → PCH	Absolute	JSR Oper	20	3	-----
LDA Load accumulator with memory	M → A	Immediate Zero Page Zero Page,X Absolute Absolute,X Absolute,Y (Indirect,X) (Indirect),Y	LDA #Oper LDA Oper LDA Oper,X LDA Oper LDA Oper,X LDA Oper,Y LDA (Oper,X) LDA (Oper),Y	A9 A5 B5 AD 8D 89 A1 B1	2 2 3 3 3 3 2 2	√√-----
LDX Load index X with memory	M → X	Immediate Zero Page Zero Page,Y Absolute Absolute,Y	LDX #Oper LDX Oper LDX Oper,Y LDX Oper LDX Oper,Y	A2 A6 B6 AE BE	2 2 3 3 3	√√-----
LDY Load index Y with memory	M → Y	Immediate Zero Page Zero Page,X Absolute Absolute,X	LDY #Oper LDY Oper LDY Oper,X LDY Oper LDY Oper,X	A0 A4 B4 AC BC	2 2 2 3 3	√√-----

Name Description	Operation	Addressing Mode	Assembly Language Form	HEX OP Code	No. Bytes	"P" Status Reg. N Z C I O V
LSR Shift right one bit (memory or accumulator)	(See Figure 1)	Accumulator Zero Page Zero Page.X Absolute Absolute.X	LSR A LSR Oper LSR Oper.X LSR Oper LSR Oper.X	4A 4B 56 4E 5E	1 2 2 3 3	0√√----
NOP No operation	No Operation	Implied	NOP	EA	1	-----
ORA "OR" memory with accumulator	A V M ← A	Immediate Zero Page Zero Page.X Absolute Absolute.X Absolute.Y (Indirect.X) (Indirect).Y	ORA #Oper ORA Oper ORA Oper.X ORA Oper ORA Oper.X ORA Oper.Y ORA (Oper.X) ORA (Oper).Y	09 05 15 00 10 19 01 11	2 2 2 3 3 3 2 2	√√-----
PHA Push accumulator on stack	A ↓	Implied	PHA	4B	1	-----
PHP Push processor status on stack	P ↓	Implied	PHP	0B	1	-----
PLA Pull accumulator from stack	A ↑	Implied	PLA	6B	1	√√-----
PLP Pull processor status from stack	P ↑	Implied	PLP	2B	1	From Stack
ROL Rotate one bit left (memory or accumulator)	(See Figure 2)	Accumulator Zero Page Zero Page.X Absolute Absolute.X	ROL A ROL Oper ROL Oper.X ROL Oper ROL Oper.X	2A 2B 36 2E 3E	1 2 2 3 3	√√√----
ROR Rotate one bit right (memory or accumulator)	(See Figure 3)	Accumulator Zero Page Zero Page.X Absolute Absolute.X	ROR A ROR Oper ROR Oper.X ROR Oper ROR Oper.X	6A 6B 76 6E 7E	1 2 2 3 3	√√√----

Name Description	Operation	Addressing Mode	Assembly Language Form	HEX OP Code	No. Bytes	"P" Status Reg. N Z C I O V
RTI Return from interrupt	P ← PC↑	Implied	RTI	40	1	From Stack
RTS Return from subroutine	PC↑, PC-1 → PC	Implied	RTS	60	1	-----
SBC Subtract memory from accumulator with borrow	A - M - C → A	Immediate Zero Page,X Absolute,X Absolute,Y Absolute,X (Indirect,X) (Indirect),Y	SBC #Oper SBC Oper SBC Oper,X SBC Oper,X SBC Oper,X SBC Oper,Y SBC (Oper,X) SBC (Oper),Y	E9 E5 F5 ED FD F9 E1 F1	2 2 2 3 3 3 2 2	√√√---
SEC Set carry flag	1 → C	Implied	SEC	38	1	--1----
SED Set decimal mode	1 → D	Implied	SED	F8	1	-----1-
SEI Set interrupt disable status	1 → I	Implied	SEI	78	1	----1---
STA Store accumulator in memory	A → M	Zero Page Zero Page,X Absolute Absolute,X Absolute,Y (Indirect,X) indirect),Y	STA Oper STA Oper,X STA Oper STA Oper,X STA Oper,Y STA (Oper,X) STA (Oper),Y	85 95 8D 9D 8B 81 91	2 2 3 3 3 2 2	-----
STX Store index X in memory	X → M	Zero Page Zero Page,Y Absolute	STX Oper STX Oper,Y STX Oper	86 96 8E	2 2 3	-----
STY Store index Y in memory	Y → M	Zero Page Zero Page,X Absolute	STY Oper STY Oper,X STY Oper	84 94 8C	2 2 3	-----
TAX Transfer accumulator to index X	A → X	Implied	TAX	AA	1	√√-----
TAY Transfer accumulator to index Y	A → Y	Implied	TAY	AB	1	√√-----
TSX Transfer stack pointer to index X	S → X	Implied	TSX	BA	1	√√-----

Name Description	Operation	Addressing Mode	Assembly Language Form	HEX OP Code	No. Bytes	"F" Status Reg. N Z C I O V
TXA Transfer index X to accumulator	X → A	Implied	TXA	9A	1	√√-----
TXS Transfer index X to stack pointer	X → S	Implied	TXS	9A	1	-----
TYA Transfer index Y to accumulator	Y → A	Implied	TYA	9E	1	√√-----

HEX OPERATION CODES

00 - BRK	2F - NOP	5E - LSR - Absolute, X
01 - ORA - (Indirect, X)	30 - BMI	5F - NOP
02 - NOP	31 - AND - (Indirect, Y)	60 - RTS
03 - NOP	32 - NOP	61 - ADC - (Indirect, X)
04 - NOP	33 - NOP	62 - NOP
05 - ORA - Zero Page	34 - NOP	63 - NOP
06 - ASL - Zero Page	35 - AND - Zero Page, X	64 - NOP
07 - NOP	36 - ROL - Zero Page, X	65 - ADC - Zero Page
08 - PHP	37 - NOP	66 - ROR - Zero Page
09 - ORA - Immediate	38 - SEC	67 - NOP
0A - ASL - Accumulator	39 - AND - Absolute, Y	68 - PLA
0B - NOP	3A - NOP	69 - ADC - Immediate
0C - NOP	3B - NOP	6A - ROR - Accumulator
0D - ORA - Absolute	3C - NOP	6B - NOP
0E - ASL - Absolute	3D - AND - Absolute, X	6C - JMP - Indirect
0F - NOP	3E - RCL - Absolute, X	6D - ADC - Absolute
10 - BPL	3F - NOP	6E - ROR - Absolute
11 - ORA - (Indirect, Y)	40 - RTI	6F - NOP
12 - NOP	41 - EOR - (Indirect, X)	70 - BVS
13 - NOP	42 - NOP	71 - ADC - (Indirect, Y)
14 - NOP	43 - NOP	72 - NOP
15 - ORA - Zero Page, X	44 - NOP	73 - NOP
16 - ASL - Zero Page, X	45 - EOR - Zero Page	74 - NOP
17 - NOP	46 - LSR - Zero Page	75 - ADC - Zero Page, X
18 - CLC	47 - NOP	76 - ROR - Zero Page, X
19 - ORA - Absolute, Y	48 - PHA	77 - NOP
1A - NOP	49 - EOR - Immediate	78 - SEI
1B - NOP	4A - LSR - Accumulator	79 - ADC - Absolute, Y
1C - NOP	4B - NOP	7A - NOP
1D - ORA - Absolute, X	4C - JMP - Absolute	7B - NOP
1E - ASL - Absolute, X	4D - EOR - Absolute	7C - NOP
1F - NOP	4E - LSR - Absolute	7D - ADC - Absolute, X NOP
20 - JSR	4F - NOP	7E - ROR - Absolute, X NOP
21 - AND - (Indirect, X)	50 - BVC	7F - NOP
22 - NOP	51 - EOR (Indirect, Y)	80 - NOP
23 - NOP	52 - NOP	81 - STA - (Indirect, X)
24 - BIT - Zero Page	53 - NOP	82 - NOP
25 - AND - Zero Page	54 - NOP	83 - NOP
26 - ROL - Zero Page	55 - EOR - Zero Page, X	84 - STY - Zero Page
27 - NOP	56 - LSR - Zero Page, X	85 - STA - Zero Page
28 - PLP	57 - NOP	86 - STX - Zero Page
29 - AND - Immediate	58 - CLI	87 - NOP
2A - ROL - Accumulator	59 - EOR - Absolute, Y	88 - DEY
2B - NOP	5A - NOP	89 - NOP
2C - BIT - Absolute	5B - NOP	8A - TXA
2D - AND - Absolute	5C - NOP	8B - NOP
2E - ROL - Absolute	5D - EOR - Absolute, X	8C - STY - Absolute

8D — STA — Absolute
8E — STX — Absolute
8F — NOP
90 — BCC
91 — STA — Indirect, Y
92 — NOP
93 — NOP
94 — STY — Zero Page, X
95 — STA — Zero Page, X
96 — STX — Zero Page, Y
97 — NOP
98 — TYA
99 — STA — Absolute, Y
9A — TXS
9B — NOP
9C — NOP
9D — STA — Absolute, X
9E — NOP
9F — NOP
A0 — LDY — Immediate
A1 — LDA — Indirect, X
A2 — LDX — Immediate
A3 — NOP
A4 — LDY — Zero Page
A5 — LDA — Zero Page
A6 — LDX — Zero Page
A7 — NOP
A8 — TAY
A9 — LDA — Immediate
AA — TAX
AB — NOP
AC — LDY — Absolute
AD — Absolute
AE — LDX — Absolute
AF — NOP
B0 — BCS
B1 — LDA — Indirect, Y
B2 — NOP
B3 — NOP

B4 — LDY — Zero Page, X
B5 — LDA — Zero Page, X
B6 — LDX — Zero Page, Y
B7 — NOP
B8 — CLV
B9 — LDA — Absolute, Y
BA — TSX
BB — NOP
BC — LDY — Absolute, X
BD — LDA — Absolute, X
BE — LDX — Absolute, Y
BF — NOP
C0 — CPY — Immediate
C1 — CMP — Indirect, X
C2 — NOP
C3 — NOP
C4 — CPY — Zero Page
C5 — CMP — Zero Page
C6 — DEC — Zero Page
C7 — NOP
C8 — INY
C9 — CMP — Immediate
CA — DEX
CB — NOP
CC — CPY — Absolute
CD — CMP — Absolute
CE — DEC — Absolute
CF — NOP
D0 — BNE
D1 — CMP — Indirect, Y
D2 — NOP
D3 — NOP
D4 — NOP
D5 — CMP — Zero Page, X
D6 — DEC — Zero Page, X
D7 — NOP
D8 — CLD
D9 — CMP — Absolute, Y
DA — NOP

DB — NOP
DC — NOP
DD — CMP — Absolute, X
DE — DEC — Absolute, X
DF — NOP
E0 — CPX — Immediate
E1 — SBC — Indirect, X
E2 — NOP
E3 — NOP
E4 — CPX — Zero Page
E5 — SBC — Zero Page
E6 — INC — Zero Page
E7 — NOP
E8 — INX
E9 — SBC — Immediate
EA — NOP
EB — NOP
EC — CPX — Absolute
ED — SBC — Absolute
EE — INC — Absolute
EF — NOP
F0 — BEQ
F1 — SBC — Indirect, Y
F2 — NOP
F3 — NOP
F4 — NOP
F5 — SBC — Zero Page, X
F6 — INC — Zero Page, X
F7 — NOP
F8 — SED
F9 — SBC — Absolute, Y
FA — NOP
FB — NOP
FC — NOP
FD — SBC — Absolute, X
FE — INC — Absolute, X
FF — NOP

APPENDIX B

SPECIAL LOCATIONS

Location:			
Hex	Decimal	Description:	
SC000	49152	-16384	Keyboard Data
SC010	49168	-16368	Clear Keyboard Strobe

Screen	Page	Begins at:		Ends at:	
		Hex	Decimal	Hex	Decimal
Text/Lo-Res	Primary	S400	1024	S7FF	2047
	Secondary	S800	2048	SBFF	3071
Hi-Res	Primary	S2000	8192	S3FFF	16383
	Secondary	S4000	16384	S5FFF	24575

Location:			
Hex	Decimal	Description:	
SC050	49232	-16304	Display a GRAPHICS mode.
SC051	49233	-16303	Display TEXT mode.
SC052	49234	-16302	Display all TEXT or GRAPHICS.
SC053	49235	-16301	Mix TEXT and a GRAPHICS mode.
SC054	49236	-16300	Display the Primary page (Page 1).
SC055	49237	-16299	Display the Secondary page (Page 2).
SC056	49238	-16298	Display LO-RES GRAPHICS mode.
SC057	49239	-16297	Display HI-RES GRAPHICS mode.

Ann.	State	Address:		
		Decimal	Hex	
0	off	49240	-16296	SC058
	on	49241	-16295	SC059
1	off	49242	-16294	SC05A
	on	49243	-16293	SC05B
2	off	49244	-16292	SC05C
	on	49245	-16291	SC05D
3	off	49246	-16290	SC05E
	on	49247	-16289	SC05F

Function	Address:		Read/Write	
	Decimal	Hex		
Speaker	49200	-16336	SC030	R
Cassette Out	49184	-16352	SC020	R
Cassette In	49256	-16288	SC060	R
Annunciators	49240 through 49247	-16296 through -16289	SC058 through SC05F	R/W
Flag inputs	49249 49250 49251	-16287 -16286 -16285	SC061 SC062 SC063	R R R
Analog Inputs	49252 49253 49254 49255	-16284 -16283 -16282 -16281	SC064 SC065 SC066 SC067	R
Analog Clear	49264	-16272	SC070	R/W
Utility Strobe	49216	-16320	SC040	R

Function	Location:		Minimum/Normal/Maximum Value	
	Decimal	Hex	Decimal	Hex
Left Edge	32	S20	0/0/39	S0/S0/S17
Width	33	S21	0/40/40	S0/S28/S28
Top Edge	34	S22	0/0/24	S0/S0/S18
Bottom Edge	35	S23	0/24/24	S0/S18/S18

Value:		Effect:
Decimal	Hex	
255	SFF	COUW will display characters in Normal mode.
63	S3F	COUW will display characters in Inverse mode.
127	S7F	COUW will display letters in Flashing mode, all other characters in Inverse mode.

Location:		Contents:
Decimal	Hex	
1010	S3F2	Soft Entry Vector. These two locations contain the address of the reentry point for whatever language is in use. Normally contains SE003.
1011	S3F3	
1012	S3F4	Power-Up Byte. Normally contains \$45.
64367 (-1169)	SFB6F	This is the beginning of a machine language subroutine which sets up the power-up location.

Table 14: Page Three Monitor Locations

Address:		Use:	
Decimal	Hex	Monitor ROM	Autostart ROM
1008	\$3F0	None.	Holds the address of the subroutine which handles machine language "BRK" requests (normally \$FA59).
1009	\$3F1		
1010	\$3F2	None.	Soft Entry Vector.
1011	\$3F3		
1012	\$3F4	None.	Power-up byte.
1013	\$3F5	Holds a "JuMP" instruction to the subroutine which handles Applesoft II "&" commands. Normally \$4C \$58 \$FF.	
1014	\$3F6		
1015	\$3F7		
1016	\$3F8	Holds a "JuMP" instruction to the subroutine which handles "User" (CTRL Y) commands.	
1017	\$3F9		
1018	\$3FA		
1019	\$3FB	Holds a "JuMP" instruction to the subroutine which handles Non-Maskable Interrupts.	
1020	\$3FC		
1021	\$3FD		
1022	\$3FE	Holds the address of the subroutine which handles Interrupt ReQuests.	
1023	\$3FF		

Table 22: Built-In I/O Locations

	\$0	\$1	\$2	\$3	\$4	\$5	\$6	\$7	\$8	\$9	\$A	\$B	\$C	\$D	\$E	\$F
SC000	Keyboard Data Input															
SC010	Clear Keyboard Strobe															
SC020	Cassette Output Toggle															
SC030	Speaker Toggle															
SC040	Utility Strobe															
SC050	gr	tx	nomix	mix	pri	sec	lores	hires	an0	an1	an2	an3				
SC060	cin	pb1	pb2	pb3	gc0	gc1	gc2	gc3	repeat SC060-SC067							
SC070	Game Controller Strobe															

Key to abbreviations:

gr	Set GRAPHICS mode	tx	Set TEXT mode
nomix	Set all text or graphics	mix	Mix text and graphics
pri	Display primary page	sec	Display secondary page
lores	Display Low-Res Graphics	hires	Display Hi-Res Graphics
an	Annunciator outputs	pb	Pushbutton inputs
gc	Game Controller inputs	cin	Cassette Input

Table 23: Peripheral Card I/O Locations

	\$0	\$1	\$2	\$3	\$4	\$5	\$6	\$7	\$8	\$9	\$A	\$B	\$C	\$D	\$E	\$F	
SC080	Input/Output for slot number									0							
SC090										1							
SC0A0										2							
SC0B0										3							
SC0C0										4							
SC0D0										5							
SC0E0										6							
SC0F0										7							

Table 24: Peripheral Card PROM Locations

	\$00	\$10	\$20	\$30	\$40	\$50	\$60	\$70	\$80	\$90	\$A0	\$B0	\$C0	\$D0	\$E0	\$F0	
SC100	PROM space for slot number									1							
SC200										2							
SC300										3							
SC400										4							
SC500										5							
SC600										6							
SC700										7							

Table 25: I/O Location Base Addresses

Base Address	Slot							
	0	1	2	3	4	5	6	7
SC080	SC080	SC090	SC0A0	SC0B0	SC0C0	SC0D0	SC0E0	SC0F0
SC081	SC081	SC091	SC0A1	SC0B1	SC0C1	SC0D1	SC0E1	SC0F1
SC082	SC082	SC092	SC0A2	SC0B2	SC0C2	SC0D2	SC0E2	SC0F2
SC083	SC083	SC093	SC0A3	SC0B3	SC0C3	SC0D3	SC0E3	SC0F3
SC084	SC084	SC094	SC0A4	SC0B4	SC0C4	SC0D4	SC0E4	SC0F4
SC085	SC085	SC095	SC0A5	SC0B5	SC0C5	SC0D5	SC0E5	SC0F5
SC086	SC086	SC096	SC0A6	SC0B6	SC0C6	SC0D6	SC0E6	SC0F6
SC087	SC087	SC097	SC0A7	SC0B7	SC0C7	SC0D7	SC0E7	SC0F7
SC088	SC088	SC098	SC0A8	SC0B8	SC0C8	SC0D8	SC0E8	SC0F8
SC089	SC089	SC099	SC0A9	SC0B9	SC0C9	SC0D9	SC0E9	SC0F9
SC08A	SC08A	SC09A	SC0AA	SC0BA	SC0CA	SC0DA	SC0EA	SC0FA
SC08B	SC08B	SC09B	SC0AB	SC0BB	SC0CB	SC0DB	SC0EB	SC0FB
SC08C	SC08C	SC09C	SC0AC	SC0BC	SC0CC	SC0DC	SC0EC	SC0FC
SC08D	SC08D	SC09D	SC0AD	SC0BD	SC0CD	SC0DD	SC0ED	SC0FD
SC08E	SC08E	SC09E	SC0AE	SC0BE	SC0CE	SC0DE	SC0EE	SC0FE
SC08F	SC08F	SC09F	SC0AF	SC0BF	SC0CF	SC0DF	SC0EF	SC0FF

I/O Locations

Table 26: I/O Scratchpad RAM Addresses

Base Address	Slot Number						
	1	2	3	4	5	6	7
\$0478	\$0479	\$047A	\$047B	\$047C	\$047D	\$047E	\$047F
\$04F8	\$04F9	\$04FA	\$04FB	\$04FC	\$04FD	\$04FE	\$04FF
\$0578	\$0579	\$057A	\$057B	\$057C	\$057D	\$057E	\$057F
\$05F8	\$05F9	\$05FA	\$05FB	\$05FC	\$05FD	\$05FE	\$05FF
\$0678	\$0679	\$067A	\$067B	\$067C	\$067D	\$067E	\$067F
\$06F8	\$06F9	\$06FA	\$06FB	\$06FC	\$06FD	\$06FE	\$06FF
\$0778	\$0779	\$077A	\$077B	\$077C	\$077D	\$077E	\$077F
\$07F8	\$07F9	\$07FA	\$07FB	\$07FC	\$07FD	\$07FE	\$07FF

APPENDIX C

ROM LISTINGS

- 136 AUTOSTART ROM LISTING
- 155 MONITOR ROM LISTING

AUTOSTART ROM LISTING

```

0000:      2 *****
0000:      3 *
0000:      4 * APPLE II
0000:      5 * MONITOR II
0000:      6 *
0000:      7 * COPYRIGHT 1978 BY
0000:      8 * APPLE COMPUTER, INC.
0000:      9 *
0000:     10 * ALL RIGHTS RESERVED
0000:     11 *
0000:     12 * STEVE WOZNIAK
0000:     13 *
0000:     14 *****
0000:     15 *
0000:     16 * MODIFIED NOV 1978
0000:     17 * BY JOHN A
0000:     18 *
0000:     19 *****
FB00:     20          ORG $FB00
FB00:     21          OBJ $2000
FB00:     22 *****
FB00:     23 LOC0    EGU $00
FB00:     24 LOC1    EGU $01
FB00:     25 WNDLFT  EGU $20
FB00:     26 WNDWDTH  EGU $21
FB00:     27 WNDTOP   EGU $22
FB00:     28 WNDBTH  EGU $23
FB00:     29 CH      EGU $24
FB00:     30 CV      EGU $25
FB00:     31 GBASL   EGU $26
FB00:     32 GBASH   EGU $27
FB00:     33 BASL    EGU $28
FB00:     34 BASH    EGU $29
FB00:     35 BAS2L   EGU $2A
FB00:     36 BAS2H   EGU $2B
FB00:     37 H2      EGU $2C
FB00:     38 LNMEM   EGU $2C
FB00:     39 V2      EGU $2D
FB00:     40 RNMEM   EGU $2D
FB00:     41 MASH    EGU $2E
FB00:     42 CHKSUM  EGU $2E
FB00:     43 FORMAT  EGU $2E
FB00:     44 LASTIN  EGU $2F
FB00:     45 LENGTH  EGU $2F
FB00:     46 SIGN    EGU $2F
FB00:     47 COLOR   EGU $30
FB00:     48 MODE    EGU $31
FB00:     49 INVFLG  EGU $32
FB00:     50 PROMPT  EGU $33
FB00:     51 YSAV    EGU $34
FB00:     52 YSAV1   EGU $35
FB00:     53 CSHL    EGU $36
FB00:     54 CSHH    EGU $37
FB00:     55 KSHL    EGU $38
FB00:     56 KSHH    EGU $39
FB00:     57 PCL     EGU $3A
FB00:     58 PCH     EGU $3B
FB00:     59 A1L    EGU $3C
FB00:     60 A1H    EGU $3D
FB00:     61 A2L    EGU $3E
FB00:     62 A2H    EGU $3F
FB00:     63 A3L    EGU $40
FB00:     64 A3H    EGU $41
FB00:     65 A4L    EGU $42
FB00:     66 A4H    EGU $43
FB00:     67 A5L    EGU $44
FB00:     68 A5H    EGU $45

```

FB00:	69	ACC	EGU	#45	; NOTE OVERLAP WITH A5H!
FB00:	70	XREG	EGU	#46	
FB00:	71	YREG	EGU	#47	
FB00:	72	STATUS	EGU	#48	
FB00:	73	SPNT	EGU	#49	
FB00:	74	RNDL	EGU	#4E	
FB00:	75	RNDH	EGU	#4F	
FB00:	76	PICK	EGU	#95	
FB00:	77	IN	EGU	#0200	
FB00:	78	BRKV	EGU	#3F0	; NEW VECTOR FOR BRK
FB00:	79	SOFTV	EGU	#3F2	; VECTOR FOR WARM START
FB00:	80	PWREDUP	EGU	#3F4	; THIS MUST = EDR #6A5 OF SOFTV+1
FB00:	81	AMPERV	EGU	#3F5	; APPLESOFT & EXIT VECTOR
FB00:	82	USRADR	EGU	#03FB	
FB00:	83	NMI	EGU	#03FB	
FB00:	84	IRQLQC	EGU	#3FE	
FB00:	85	LINE1	EGU	#400	
FB00:	86	MSLOT	EGU	#07FB	
FB00:	87	IQADR	EGU	#C000	
FB00:	88	KBD	EGU	#C000	
FB00:	89	KBDSTRB	EGU	#C010	
FB00:	90	TAPEOUT	EGU	#C020	
FB00:	91	SPKR	EGU	#C030	
FB00:	92	TXTCLE	EGU	#C050	
FB00:	93	TXTSET	EGU	#C051	
FB00:	94	MIXCLR	EGU	#C052	
FB00:	95	MIXSET	EGU	#C053	
FB00:	96	LOWSCR	EGU	#C054	
FB00:	97	HISCR	EGU	#C055	
FB00:	98	LORES	EGU	#C056	
FB00:	99	HIRES	EGU	#C057	
FB00:	100	SETAN0	EGU	#C058	
FB00:	101	CLRAN0	EGU	#C059	
FB00:	102	SETAN1	EGU	#C05A	
FB00:	103	CLRAN1	EGU	#C05B	
FB00:	104	SETAN2	EGU	#C05C	
FB00:	105	CLRAN2	EGU	#C05D	
FB00:	106	SETAN3	EGU	#C05E	
FB00:	107	CLRAN3	EGU	#C05F	
FB00:	108	TAPEIN	EGU	#C060	
FB00:	109	PADDLO	EGU	#C064	
FB00:	110	PTRIQ	EGU	#C070	
FB00:	111	CLRRDM	EGU	#CFFF	
FB00:	112	BASIC	EGU	#E000	
FB00:	113	BASIC2	EGU	#E003	
FB00:		114		PAGE	
FB00:	4A		115	PLOT	LSR A
FB01:	08		116		PHP
FB02:	20 47 FB		117	JSR	QBASCALC
FB05:	28		118		PLP
FB06:	A9 0F		119	LDA	#60F
FB08:	90 02		120	BCC	RTMASK
FB0A:	69 E0		121	ADC	#6E0
FB0C:	85 2E		122	RTMASK	STA MASK
FB0E:	81 26		123	PLOT1	LDA (QBASL), Y
FB10:	45 30		124		EDR COLOR
FB12:	25 2E		125		AND MASK
FB14:	51 26		126		EDR (QBASL), Y
FB16:	91 26		127		STA (QBASL), Y
FB18:	60		128		RTS
FB19:	20 00 FB		129	HLINE	JSR PLOT
FB1C:	C4 2C		130	HLINE1	CPY H2
FB1E:	80 11		131		BCS RTS1
FB20:	C8		132		INY
FB21:	20 0E FB		133	JSR	PLOT1
FB24:	90 F6		134	BCC	HLINE1
FB26:	69 01		135	VLINEZ	ADC #601
FB28:	48		136	VLINE	PHA
FB29:	20 00 FB		137	JSR	PLOT
FB2C:	68		138		PLA
FB2D:	C5 2D		139		CHP V2
FB2F:	90 F5		140	BCC	VLINEZ
FB31:	60		141	RTS1	RTS

FB32:	A0 2F	142	CLRSCR	LDY ##2F
FB34:	D0 02	143		BNE CLRSC2
FB36:	A0 27	144	CLRTOP	LDY ##27
FB38:	84 2D	145	CLRSC2	STY V2
FB3A:	A0 27	146		LDY ##27
FB3C:	A9 00	147	CLRSC3	LDA ##00
FB3E:	85 30	148		STA COLOR
FB40:	20 28 FB	149		JSR VLINE
FB42:	88	150		DEY
FB44:	10 F6	151		BPL CLRSC3
FB46:	60	152		RTS
FB47:		153		PAGE
FB47:	48	154	GBASCALC	PHA
FB48:	4A	155		LSR A
FB49:	29 03	156		AND ##03
FB4E:	09 04	157		ORA ##04
FB4D:	85 27	158		STA GBASH
FB4F:	68	159		PLA
FB50:	29 18	160		AND ##18
FB52:	90 02	161		BCC GBCALC
FB54:	69 7F	162		ADC ##7F
FB56:	85 26	163	GBCALC	STA GBASL
FB58:	0A	164		ASL A
FB59:	0A	165		ASL A
FB5A:	05 26	166		ORA GBASL
FB5C:	85 26	167		STA GBASL
FB5E:	60	168		RTS
FB5F:	A5 30	169		LDA COLOR
FB61:	1B	170		CLC
FB62:	69 03	171		ADC ##03
FB64:	29 0F	172	SETCOL	AND ##0F
FB66:	85 30	173		STA COLOR
FB68:	0A	174		ASL A
FB69:	0A	175		ASL A
FB6A:	0A	176		ASL A
FB6B:	0A	177		ASL A
FB6C:	05 30	178		ORA COLOR
FB6E:	85 30	179		STA COLOR
FB70:	60	180		RTS
FB71:	4A	181	SCRN	LSR A
FB72:	08	182		PHP
FB73:	20 47 FB	183		JSR GBASCALC
FB76:	81 26	184		LDA (GBASL), Y
FB78:	28	185		PLP
FB79:	90 04	186	SCRN2	BCC RTMSKZ
FB7B:	4A	187		LSR A
FB7C:	4A	188		LSR A
FB7D:	4A	189		LSR A
FB7E:	4A	190		LSR A
FB7F:	29 0F	191	RTMSKZ	AND ##0F
FB81:	60	192		RTS
FB82:		193		PAGE
FB82:	A6 3A	194	INSDS1	LDX PCL
FB84:	A4 3B	195		LDY PCH
FB86:	20 96 FD	196		JSR PRYX2
FB89:	20 4B F9	197		JSR PRBLNK
FB8C:	A1 3A	198	INSDS2	LDA (PCL, X)
FB8E:	AB	199		TAY
FB8F:	4A	200		LSR A
FB90:	90 09	201		BCC IEVEN
FB92:	6A	202		RDR A
FB93:	80 10	203		BCS ERR
FB95:	C9 A2	204		CMP ##A2
FB97:	F0 0C	205		BEG ERR
FB99:	29 87	206		AND ##87
FB9B:	4A	207	IEVEN	LSR A
FB9C:	AA	208		TAX
FB9D:	8D 62 F9	209		LDA FMT1, X
FBA0:	20 79 FB	210		JSR SCRN2
FBA3:	D0 04	211		BNE GETFMT
FBA5:	A0 80	212	ERR	LDY ##80
FBA7:	A9 00	213		LDA ##00
FBA9:	AA	214	GETFMT	TAX

FBA4:	BD A6 F9	215	LDA FMT2, X
FBA5:	85 2E	216	STA FORMAT
FBAF:	29 03	217	AND ##03
FBB1:	85 2F	218	STA LENGTH
FBB3:	9B	219	TYA
FBB4:	29 BF	220	AND ##BF
FBB6:	AA	221	TAX
FBB7:	9B	222	TYA
FBB8:	A0 03	223	LDY ##03
FBBA:	E0 8A	224	CPX ##8A
FBBC:	F0 0B	225	BEG MNNDX3
FBBE:	4A	226	MNNDX1 LSR A
FBBF:	90 0B	227	BCC MNNDX3
FBC1:	4A	228	LSR A
FBC2:	4A	229	MNNDX2 LSR A
FBC3:	09 20	230	ORA ##20
FBC5:	BB	231	DEY
FBC6:	D0 FA	232	BNE MNNDX2
FBC8:	C8	233	INY
FBC9:	BB	234	MNNDX3 DEY
FBCA:	D0 F2	235	BNE MNNDX1
FBCC:	60	236	RTS
FBCD:	FF FF FF	237	DFB \$FF, \$FF, \$FF
FBD0:		238	PAGE
FBD0:	20 B2 F8	239	INSTDSP JSR INSDS1
FBD3:	4B	240	PHA
FBD4:	B1 3A	241	PRNTOP LDA (PCL), Y
FBD6:	20 DA FD	242	JSR PRBYTE
FBD9:	A2 01	243	LDX ##01
FBD0:	20 4A F9	244	PRNTBL JSR PRBL2
FBD0:	C4 2F	245	CPY LENGTH
FBE0:	CB	246	INY
FBE1:	90 F1	247	BCC PRNTOP
FBE3:	A2 03	248	LDX ##03
FBE5:	C0 04	249	CPY ##04
FBE7:	90 F2	250	BCC PRNTBL
FBE9:	6B	251	PLA
FBEA:	AB	252	TAY
FBE8:	B9 C0 F9	253	LDA MNEML, Y
FBE8:	B5 2C	254	STA LMNEM
FBF0:	B9 00 FA	255	LDA MNEMR, Y
FBF3:	85 2D	256	STA RMNEM
FBF5:	A9 00	257	NXTCOL LDA ##00
FBF7:	A0 05	258	LDY ##05
FBF9:	06 2D	259	PRM2 ASL RMNEM
FBF8:	26 2C	260	ROL LMNEM
Fbfd:	2A	261	ROL A
Fbfe:	BB	262	DEY
FbFF:	D0 F8	263	BNE PRM2
F901:	69 BF	264	ADC ##BF
F903:	20 ED FD	265	JSR COUT
F906:	CA	266	DEX
F907:	D0 EC	267	BNE NXTCOL
F909:	20 4B F9	268	JSR PRBLNK
F90C:	A4 2F	269	LDY LENGTH
F90E:	A2 06	270	LDX ##06
F910:	E0 03	271	PRADR1 CPX ##03
F912:	F0 1C	272	BEG PRADR5
F914:	06 2E	273	PRADR2 ASL FORMAT
F916:	90 0E	274	BCC PRADR3
F918:	BD B3 F9	275	LDA CHAR1-1, X
F91B:	20 ED FD	276	JSR COUT
F91E:	BD B9 F9	277	LDA CHAR2-1, X
F921:	F0 03	278	BEG PRADR3
F923:	20 ED FD	279	JSR COUT
F926:	CA	280	PRADR3 DEX
F927:	D0 E7	281	BNE PRADR1
F929:	60	282	RTS
F92A:	BB	283	PRADR4 DEY
F92B:	30 E7	284	BMI PRADR2
F92D:	20 DA FD	285	JSR PRBYTE
F930:	A5 2E	286	PRADR5 LDA FORMAT
F932:	C9 E8	287	CMF ##E8

F934:	B1 3A	288	LDA (PCL), Y
F936:	90 F2	289	BCC PRADR4
F938:		290	PAGE
F938:	20 56 F9	291	RELADR JSR PCADJ3
F938:	AA	292	TAX
F93C:	EB	293	INX
F93D:	D0 01	294	BNE PRNTYX
F93F:	C8	295	INY
F940:	98	296	PRNTYX TYA
F941:	20 DA FD	297	PRNTAX JSR PRBYTE
F944:	8A	298	PRNTAX TXA
F945:	4C DA FD	299	JMP PRBYTE
F948:	A2 03	300	PRBLNK LDX ##03
F94A:	A9 A0	301	PRBL2 LDA ##A0
F94C:	20 ED FD	302	PRBL3 JSR COUT
F94F:	CA	303	DEX
F950:	D0 FB	304	BNE PRBL2
F952:	60	305	RTS
F953:	38	306	PCADJ SEC
F954:	A5 2F	307	PCADJ2 LDA LENGTH
F956:	A4 3B	308	PCADJ3 LDY PCH
F958:	AA	309	TAX
F959:	10 01	310	BPL PCADJ4
F95B:	88	311	DEY
F95C:	65 3A	312	PCADJ4 ADC PCL
F95E:	90 01	313	BCC RTS2
F960:	C8	314	INY
F961:	60	315	RTS2 RTS
F962:	04	316	FMT1 DFB #04
F963:	20	317	DFB #20
F964:	54	318	DFB #54
F965:	30	319	DFB #30
F966:	0D	320	DFB #0D
F967:	80	321	DFB #80
F968:	04	322	DFB #04
F969:	90	323	DFB #90
F96A:	03	324	DFB #03
F96B:	22	325	DFB #22
F96C:	54	326	DFB #54
F96D:	33	327	DFB #33
F96E:	0D	328	DFB #0D
F96F:	80	329	DFB #80
F970:	04	330	DFB #04
F971:	90	331	DFB #90
F972:	04	332	DFB #04
F973:	20	333	DFB #20
F974:	54	334	DFB #54
F975:	33	335	DFB #33
F976:	0D	336	DFB #0D
F977:	80	337	DFB #80
F978:	04	338	DFB #04
F979:	90	339	DFB #90
F97A:	04	340	DFB #04
F97B:	20	341	DFB #20
F97C:	54	342	DFB #54
F97D:	3B	343	DFB #3B
F97E:	0D	344	DFB #0D
F97F:	80	345	DFB #80
F980:	04	346	DFB #04
F981:	90	347	DFB #90
F982:	00	348	DFB #00
F983:	22	349	DFB #22
F984:	44	350	DFB #44
F985:	33	351	DFB #33
F986:	0D	352	DFB #0D
F987:	C8	353	DFB #C8
F988:	44	354	DFB #44
F989:	00	355	DFB #00
F98A:	11	356	DFB #11
F98B:	22	357	DFB #22
F98C:	44	358	DFB #44
F98D:	33	359	DFB #33
F98E:	0D	360	DFB #0D

F98F:	CB	361	DFB	*CB	
F990:	44	362	DFB	*44	
F991:	A9	363	DFB	*A9	
F992:	01	364	DFB	*01	
F993:	22	365	DFB	*22	
F994:	44	366	DFB	*44	
F995:	33	367	DFB	*33	
F996:	0D	368	DFB	*0D	
F997:	80	369	DFB	*80	
F998:	04	370	DFB	*04	
F999:	90	371	DFB	*90	
F99A:	01	372	DFB	*01	
F99B:	22	373	DFB	*22	
F99C:	44	374	DFB	*44	
F99D:	33	375	DFB	*33	
F99E:	0D	376	DFB	*0D	
F99F:	80	377	DFB	*80	
F9A0:	04	378	DFB	*04	
F9A1:	90	379	DFB	*90	
F9A2:	26	380	DFB	*26	
F9A3:	31	381	DFB	*31	
F9A4:	87	382	DFB	*87	
F9A5:	9A	383	DFB	*9A	
F9A6:	00	384	FMT2	DFB	*00
F9A7:	21	385	DFB	*21	
F9A8:	81	386	DFB	*81	
F9A9:	82	387	DFB	*82	
F9AA:	00	388	DFB	*00	
F9AB:	00	389	DFB	*00	
F9AC:	59	390	DFB	*59	
F9AD:	4D	391	DFB	*4D	
F9AE:	91	392	DFB	*91	
F9AF:	92	393	DFB	*92	
F9B0:	86	394	DFB	*86	
F9B1:	4A	395	DFB	*4A	
F9B2:	85	396	DFB	*85	
F9B3:	9D	397	DFB	*9D	
F9B4:	AC	398	CHAR1	DFB	*AC
F9B5:	A9	399	DFB	*A9	
F9B6:	AC	400	DFB	*AC	
F9B7:	A3	401	DFB	*A3	
F9B8:	AB	402	DFB	*AB	
F9B9:	A4	403	DFB	*A4	
F9BA:	D9	404	CHAR2	DFB	*D9
F9BB:	00	405	DFB	*00	
F9BC:	DB	406	DFB	*DB	
F9BD:	A4	407	DFB	*A4	
F9BE:	A4	408	DFB	*A4	
F9BF:	00	409	DFB	*00	
F9C0:	1C	410	MNEPL	DFB	*1C
F9C1:	8A	411	DFB	*8A	
F9C2:	1C	412	DFB	*1C	
F9C3:	23	413	DFB	*23	
F9C4:	5D	414	DFB	*5D	
F9C5:	8B	415	DFB	*8B	
F9C6:	18	416	DFB	*18	
F9C7:	A1	417	DFB	*A1	
F9C8:	9D	418	DFB	*9D	
F9C9:	8A	419	DFB	*8A	
F9CA:	1D	420	DFB	*1D	
F9CB:	23	421	DFB	*23	
F9CC:	9D	422	DFB	*9D	
F9CD:	8B	423	DFB	*8B	
F9CE:	1D	424	DFB	*1D	
F9CF:	A1	425	DFB	*A1	
F9D0:	00	426	DFB	*00	
F9D1:	29	427	DFB	*29	
F9D2:	19	428	DFB	*19	
F9D3:	AE	429	DFB	*AE	
F9D4:	69	430	DFB	*69	
F9D5:	AE	431	DFB	*AE	
F9D6:	19	432	DFB	*19	
F9D7:	23	433	DFB	*23	

F9DB:	24	434	DFB	¶24
F9D9:	53	435	DFB	¶53
F9DA:	1B	436	DFB	¶1B
F9DB:	23	437	DFB	¶23
F9DC:	24	438	DFB	¶24
F9DD:	53	439	DFB	¶53
F9DE:	19	440	DFB	¶19
F9DF:	A1	441	DFB	¶A1
F9E0:	00	442	DFB	¶00
F9E1:	1A	443	DFB	¶1A
F9E2:	5B	444	DFB	¶5B
F9E3:	5B	445	DFB	¶5B
F9E4:	A5	446	DFB	¶A5
F9E5:	69	447	DFB	¶69
F9E6:	24	448	DFB	¶24
F9E7:	24	449	DFB	¶24
F9EB:	AE	450	DFB	¶AE
F9E9:	AE	451	DFB	¶AE
F9EA:	AB	452	DFB	¶AB
F9EB:	AD	453	DFB	¶AD
F9EC:	29	454	DFB	¶29
F9ED:	00	455	DFB	¶00
F9EE:	7C	456	DFB	¶7C
F9EF:	00	457	DFB	¶00
F9F0:	15	458	DFB	¶15
F9F1:	9C	459	DFB	¶9C
F9F2:	6D	460	DFB	¶6D
F9F3:	9C	461	DFB	¶9C
F9F4:	A5	462	DFB	¶A5
F9F5:	69	463	DFB	¶69
F9F6:	29	464	DFB	¶29
F9F7:	53	465	DFB	¶53
F9FB:	84	466	DFB	¶84
F9F9:	13	467	DFB	¶13
F9FA:	34	468	DFB	¶34
F9FB:	11	469	DFB	¶11
F9FC:	A5	470	DFB	¶A5
F9FD:	69	471	DFB	¶69
F9FE:	23	472	DFB	¶23
F9FF:	A0	473	DFB	¶A0
FA00:	DB	474	DFB	¶DB
FA01:	62	475	DFB	¶62
FA02:	5A	476	DFB	¶5A
FA03:	4B	477	DFB	¶4B
FA04:	26	478	DFB	¶26
FA05:	62	479	DFB	¶62
FA06:	94	480	DFB	¶94
FA07:	8B	481	DFB	¶8B
FA08:	54	482	DFB	¶54
FA09:	44	483	DFB	¶44
FA0A:	CB	484	DFB	¶CB
FA0B:	54	485	DFB	¶54
FA0C:	6B	486	DFB	¶6B
FA0D:	44	487	DFB	¶44
FA0E:	EB	488	DFB	¶EB
FA0F:	94	489	DFB	¶94
FA10:	00	490	DFB	¶00
FA11:	B4	491	DFB	¶B4
FA12:	0B	492	DFB	¶0B
FA13:	84	493	DFB	¶84
FA14:	74	494	DFB	¶74
FA15:	B4	495	DFB	¶B4
FA16:	2B	496	DFB	¶2B
FA17:	6E	497	DFB	¶6E
FA18:	74	498	DFB	¶74
FA19:	F4	499	DFB	¶F4
FA1A:	CC	500	DFB	¶CC
FA1B:	4A	501	DFB	¶4A
FA1C:	72	502	DFB	¶72
FA1D:	F2	503	DFB	¶F2
FA1E:	A4	504	DFB	¶A4
FA1F:	8A	505	DFB	¶8A
FA20:	00	506	DFB	¶00

MNEMR

FA21:	AA	507		DFB	9AA
FA22:	A2	508		DFB	9A2
FA23:	A2	509		DFB	9A2
FA24:	74	510		DFB	974
FA25:	74	511		DFB	974
FA26:	74	512		DFB	974
FA27:	72	513		DFB	972
FA28:	44	514		DFB	944
FA29:	68	515		DFB	968
FA2A:	B2	516		DFB	9B2
FA2B:	32	517		DFB	932
FA2C:	B2	518		DFB	9B2
FA2D:	00	519		DFB	900
FA2E:	22	520		DFB	922
FA2F:	00	521		DFB	900
FA30:	1A	522		DFB	91A
FA31:	1A	523		DFB	91A
FA32:	26	524		DFB	926
FA33:	26	525		DFB	926
FA34:	72	526		DFB	972
FA35:	72	527		DFB	972
FA36:	88	528		DFB	988
FA37:	CB	529		DFB	9CB
FA38:	C4	530		DFB	9C4
FA39:	CA	531		DFB	9CA
FA3A:	26	532		DFB	926
FA3B:	48	533		DFB	948
FA3C:	44	534		DFB	944
FA3D:	44	535		DFB	944
FA3E:	A2	536		DFB	9A2
FA3F:	CB	537		DFB	9CB
FA40:		538			PAGE
FA40:	B5 45	539	IRG	STA	ACC
FA42:	68	540		PLA	
FA43:	48	541		PHA	
FA44:	0A	542		ASL	A
FA45:	0A	543		ASL	A
FA46:	0A	544		ASL	A
FA47:	30 03	545		BMI	BREAK
FA49:	6C FE 03	546		JMP	(IRGLDC)
FA4C:	28	547	BREAK	PLP	
FA4D:	20 4C FF	548		JSR	SAV1
FA50:	68	549		PLA	
FA51:	B5 3A	550		STA	PCL
FA53:	68	551		PLA	
FA54:	B5 3B	552		STA	PCH
FA56:	6C F0 03	553		JMP	(BRKV) ; BRKV WRITTEN OVER BY DISK BOOT
FA59:	20 B2 FB	554	OLDBRK	JSR	INSDS1
FA5C:	20 DA FA	555		JSR	RGDSP1
FA5F:	4C 65 FF	556		JMP	MON
FA62:	D8	557	RESET	CLD	; DO THIS FIRST THIS TIME
FA63:	20 B4 FE	558		JSR	SETNORM
FA66:	20 2F FE	559		JSR	INIT
FA69:	20 93 FE	560		JSR	SETVID
FA6C:	20 B9 FE	561		JSR	SETKBD
FA6F:	AD 58 CO	562	INITAN	LDA	SETANO ; AN0 = TTL HI
FA72:	AD 5A CO	563		LDA	SETAN1 ; AN1 = TTL HI
FA75:	AD 5D CO	564		LDA	CLRAN2 ; AN2 = TTL LO
FA78:	AD 5F CO	565		LDA	CLRAN3 ; AN3 = TTL LO
FA7B:	AD FF CF	566		LDA	CLRRDM ; TURN OFF EXTNSN ROM
FA7E:	2C 10 CO	567		BIT	KBDSTRB ; CLEAR KEYBOARD
FAB1:	D8	568	NEWMON	CLD	
FAB2:	20 3A FF	569		JSR	BELL ; CAUSES DELAY IF KEY BOUNCES
FAB5:	AD F3 03	570		LDA	SOFTEV+1 ; IS RESET HI
FAB8:	49 A5	571		EDR	99A5 ; A FUNNY COMPLEMENT OF THE
FABA:	CD F4 03	572		CHP	PWREDUP ; PWR UP BYTE ???
FABD:	DO 17	573		BNE	PWRUP ; NO SO PWRUP
FABF:	AD F2 03	574		LDA	SOFTEV ; YES SEE IF COLD START
FA92:	DO E0	575		BNE	NOFIX ; HAS BEEN DONE YET?
FA94:	A9 E0	576		LDA	99E0 ; ??
FA96:	CD F3 03	577		CHP	SOFTEV+1 ; ??
FA99:	DO 08	578		BNE	NOFIX ; YES SO REENTER SYSTEM
FA9B:	A0 03	579	FIXSEV	LDY	93 ; NO SO POINT AT WARM START

FA9D:	8C F2 03	580		STY SOFTEV ; FOR NEXT RESET
FAA0:	4C 00 E0	581		JMP BASIC ; AND DO THE COLD START
FAA3:	6C F2 03	582	NOFIX	JMP (SOFTEV) ; SOFT ENTRY VECTOR
FAA6:	20 60 FB	583		*****
FAA9:	A2 05	584	PWRUP	JSR APPLEII
FAAB:	BD FC FA	585	SETPG3	EGU * ; SET PAGE 3 VECTORS
FAAE:	9D EF 03	586		LDX #3
FAB1:	CA	587	SETPLP	LDA PWRCON-1,X ; WITH CNTRL B ADRS
FAB2:	D0 F7	588		STA BRKV-1,X ; OF CURRENT BASIC
FAB4:	A9 C8	589		DEX
FAB6:	B6 00	590		BNE SETPLP
FAB8:	B5 01	591		LDA #*CB ; LOAD HI SLOT +1
FABA:	A0 07	592		STX LOCO ; SETPG3 MUST RETURN X=0
FABC:	C6 01	593		STA LOC1 ; SET PTR H
FABE:	A5 01	594	SLOOP	LDY #7 ; Y IS BYTE PTR
FAC0:	C9 C0	595		DEC LOC1
FAC2:	F0 D7	596		LDA LOC1
FAC4:	BD FB 07	597		CMF #*CO ; AT LAST SLOT YET?
FAC7:	B1 00	598		BEG FIXSEV ; YES AND IT CANT BE A DISK
FAC9:	D9 01 FB	599		STA MSL0T
FACC:	D0 EC	600	NXTBYT	LDA (LOCO),Y ; FETCH A SLOT BYTE
FACE:	B8	601		CMF DISKID-1,Y ; IS IT A DISK ??
FACF:	B6	602		BNE SLOOP ; NO SO NEXT SLOT DOWN
FAD0:	10 F5	603		DEY
FAD2:	6C 00 00	604		DEY ; YES SO CHECK NEXT BYTE
FAD5:	EA	605		BPL NXTBYT ; UNTIL 4 CHECKED
FAD6:	EA	606		JMP (LOCO)
FAD7:		607		NOP
FAD7:	20 BE FD	608		NOP
FADA:	A9 45	609	* REGDSP	MUST ORG #FAD7
FADC:	85 40	610	REGDSP	JSR CROUT
FADE:	A9 00	611	RGDSP1	LDA #*45
FAE0:	85 41	612		STA A3L
FAE2:	A2 FB	613		LDA #*00
FAE4:	A9 A0	614		STA A3H
FAE6:	20 ED FD	615		LDX #*FB
FAE9:	BD 1E FA	616	RDSP1	LDA #*A0
FAEC:	20 ED FD	617		JSR COUT
FAEF:	A9 BD	618		LDA RTBL-251,X
FAF1:	20 ED FD	619		JSR COUT
FAF4:		620		LDA #*BD
FAF4:	B5 4A	621		JSR COUT
FAF6:	20 DA FD	622	* LDA ACC+5,X	
FAF9:	E8	623		DFB #B5,#4A
FAFA:	30 EB	624		JSR PRBYTE
FAFC:	60	625		INX
FAFD:	59 FA	626		BMI RDSP1
FAFF:	00 E0 45	627		RTS
FBO2:	20 FF 00	628	PWRCON	DW GLDBRK
FBO5:	FF	629		DFB #00,#E0,#45
FBO6:	03 FF 3C	630	DISKID	DFB #20,#FF,#00,#FF
FBO9:	C1 D0 D0	631		DFB #03,#FF,#3C
FBOC:	CC C5 A0	632	TITLE	DFB #C1,#D0,#D0
FBOF:	DD DB	633		DFB #CC,#C5,#A0
FB11:		634		DFB #DD,#DB
FB11:	C4 C2 C1	635	XLTLB	EGU *
FB14:	FF C3	636		DFB #C4,#C2,#C1
FB16:	FF FF FF	637		DFB #FF,#C3
FB19:		638		DFB #FF,#FF,#FF
FB19:	C1 D8 D9	639	* MUST	ORG #FB19
FB1C:	D0 D3	640	RTBL	DFB #C1,#D8,#D9
FB1E:	AD 70 C0	641		DFB #D0,#D3
FB21:		642	PREAD	LDA PTRIG
FB21:	A0 00	643		LST ON
FB23:	EA	644		LDY #*00
FB24:	EA	645		NOP
FB25:	BD 64 C0	646		NOP
FB28:	10 04	647	PREAD2	LDA PADDLO,X
FB2A:	C8	648		BPL RTS2D
FB2B:	D0 FB	649		INY
FB2D:	B8	650		BNE PREAD2
		651		DEY

FB2E:	60	652	RTS2D	RTS
FB2F:	A9 00	2	INIT	LDA ##00
FB31:	B5 4B	3		STA STATUS
FB33:	AD 56 C0	4		LDA LORES
FB36:	AD 54 C0	5		LDA LOWSCR
FB39:	AD 51 C0	6	SETTXT	LDA TXTSET
FB3C:	A9 00	7		LDA ##00
FB3E:	F0 0B	8		BEG SETWND
FB40:	AD 50 C0	9	SETGR	LDA TXTCLR
FB43:	AD 53 C0	10		LDA MIXSET
FB46:	20 36 FB	11		JSR CLRTOP
FB49:	A9 14	12		LDA ##14
FB4B:	B5 22	13	SETWND	STA WNDTOP
FB4D:	A9 00	14		LDA ##00
FB4F:	B5 20	15		STA WNDLFT
FB51:	A9 2B	16		LDA ##2B
FB53:	B5 21	17		STA WNDWDTH
FB55:	A9 1B	18		LDA ##1B
FB57:	B5 23	19		STA WNDBTM
FB59:	A9 17	20		LDA ##17
FB5B:	B5 25	21	TABV	STA CV
FB5D:	4C 22 FC	22		JMP VTAB
FB60:	20 5B FC	23	APPLEII	JSR HOME ; CLEAR THE SCRN
FB63:	A0 0B	24		LDY #B
FB65:	B9 0B FB	25	STITLE	LDA TITLE-1,Y ; GET A CHAR
FB6B:	99 0E 04	26		STA LINE1+14,Y
FB6B:	B6	27		DEY
FB6C:	DO F7	28		BNE STITLE
FB6E:	60	29		RTS
FB6F:	AD F3 03	30	GETPHRC	LDA SOFTEV+1
FB72:	49 A5	31		EOR ##A5
FB74:	BD F4 03	32		STA PHREDUP
FB77:	60	33		RTS
FB7B:		34	VIDWAIT	EGU * ; CHECK FOR A PAUSE
FB7B:	C9 8D	35		CMF ##BD ; ONLY WHEN I HAVE A CR
FB7A:	DO 1B	36		BNE NOWAIT ; NOT SO, DO REGULAR
FB7C:	AC 00 C0	37		LDY KBD ; IS KEY PRESSED?
FB7F:	10 13	38		BPL NOWAIT ; NO
FB81:	C0 93	39		CPY ##93 ; IS IT CTL S ?
FB83:	DO OF	40		BNE NOWAIT ; NO SO IGNORE
FB85:	2C 10 C0	41		BIT KBDSTRB ; CLEAR STROBE
FB8B:	AC 00 C0	42	KBDWAIT	LDY KBD ; WAIT TILL NEXT KEY TO RESUME
FB8B:	10 FB	43		BPL KBDWAIT ; WAIT FOR KEYPRESS
FB8D:	C0 83	44		CPY ##83 ; IS IT CONTROL C ?
FB8F:	F0 03	45		BEG NOWAIT ; YES SO LEAVE IT
FB91:	2C 10 C0	46		BIT KBDSTRB ; CLR STROBE
FB94:	4C FD FB	47	NOWAIT	JMP VIDOUT ; DO AS BEFORE
FB97:		48		PAGE
FB97:	3B	49	ESCOLD	SEC ; INSURE CARRY SET
FB9B:	4C 2C FC	50		JMP ESC1
FB9B:	AB	51	ESCNOW	TAY ; USE CHAR AS INDEX
FB9C:	B9 4B FA	52		LDA XLTLB-#C9,Y ; XLATE IJKM TO CBAD
FB9F:	20 97 FB	53		JSR ESCOLD ; DO THIS CURSOR MOTION
FBAA:	20 0C FD	54		JSR RDKEY ; AND GET NEXT
FBAB:	C9 CE	55	ESBNEW	CMF ##CE ; IS THIS AN N ?
FBAB:	DO EE	56		BCS ESCOLD ; N OR GREATER DO IT
FBAB:	C9 C9	57		CMF ##C9 ; LESS THAN 1 ?
FBAD:	90 EA	58		BCC ESCOLD ; YES SO OLD WAY
FBAD:	C9 CC	59		CMF ##CC ; IS IT A L ?
FBAF:	F0 E6	60		BEG ESCOLD ; DO NORMAL
FB81:	DO EB	61		BNE ESCNOW ; GO DO IT
FB83:	EA	62		NOP
FB84:	EA	63		NOP
FB85:	EA	64		NOP
FB86:	EA	65		NOP
FB87:	EA	66		NOP
FB8B:	EA	67		NOP
FB89:	EA	68		NOP
FB8A:	EA	69		NOP

FBBB:	EA	70	NOP	
FBBC:	EA	71	NOP	
FBBD:	EA	72	NOP	
FBBE:	EA	73	NOP	
FBBF:	EA	74	NOP	
FBC0:	EA	75	NOP	
FBC1:		76	* MUST ORG #FBC1	
FBC1:	4B	77	BASCALC PHA	
FBC2:	4A	78	LSR A	
FBC3:	29 03	79	AND ##03	
FBC5:	09 04	80	ORA ##04	
FBC7:	85 29	81	STA BASH	
FBC9:	68	82	PLA	
FBCA:	29 18	83	AND ##18	
FBCB:	90 02	84	BCC BASCLC2	
FBCD:	69 7F	85	ADC ##7F	
FBD0:	85 2B	86	BASCLC2 STA BASL	
FBD2:	0A	87	ASL A	
FBD3:	0A	88	ASL A	
FBD4:	05 2B	89	ORA BASL	
FBD6:	85 2B	90	STA BASL	
FBD8:	60	91	RTS	
FBD9:	C9 87	92	BELL1 CMP ##87	
FBD8:	D0 12	93	BNE RTS2B	
FBD0:	A9 40	94	LDA ##40	
FBD0:	20 AB FC	95	JSR WAIT	
FBE2:	A0 C0	96	LDY ##C0	
FBE4:	A9 0C	97	BELL2 LDA ##0C	
FBE6:	20 AB FC	98	JSR WAIT	
FBE9:	AD 30 CO	99	LDA SPKR	
FBE0:	88	100	DEY	
FBE0:	D0 F5	101	BNE BELL2	
FBE0:	60	102	RTS2B RTS	
FBF0:		103	PAGE	
FBF0:	A4 24	104	STORADV LDY CH	
FBF2:	91 2B	105	STA (BASL), Y	
FBF4:	E6 24	106	ADVANCE INC CH	
FBF6:	A5 24	107	LDA CH	
FBF8:	C5 21	108	CMP WNDWTH	
FBF0:	80 66	109	BCS CR	
FBF0:	60	110	RTS3 RTS	
FBF0:	C9 A0	111	VIDOUT CMP ##A0	
FBF0:	80 EF	112	BCS STORADV	
FC01:	AB	113	TAY	
FC02:	10 EC	114	BPL STORADV	
FC04:	C9 BD	115	CMP ##BD	
FC06:	F0 5A	116	BEG CR	
FC08:	C9 8A	117	CMP ##8A	
FC0A:	F0 5A	118	BEG LF	
FC0C:	C9 8B	119	CMP ##8B	
FC0E:	D0 C9	120	BNE BELL1	
FC10:	C6 24	121	BS DEC CH	
FC12:	10 EB	122	BPL RTS3	
FC14:	A5 21	123	LDA WNDWTH	
FC16:	85 24	124	STA CH	
FC18:	C6 24	125	DEC CH	
FC1A:	A5 22	126	UP LDA WNDTOP	
FC1C:	C5 25	127	CMP CV	
FC1E:	80 0B	128	BCS RTS4	
FC20:	C6 25	129	DEC CV	
FC22:	A5 25	130	VTAB LDA CV	
FC24:	20 C1 FB	131	VTABZ JSR BASCALC	
FC27:	65 20	132	ADC WNDLFT	
FC29:	85 2B	133	STA BASL	
FC2B:	60	134	RTS4 RTS	
FC2C:	49 C0	135	ESC1 EOR ##C0 ; ESC @ ?	
FC2E:	F0 2B	136	BEG HOME ; IF SO DO HOME AND CLEAR	
FC30:	69 FD	137	ADC ##FD ; ESC-A OR B CHECK	
FC32:	90 C0	138	BCC ADVANCE ; A. ADVANCE	
FC34:	F0 DA	139	BEG BS ; B. BACKSPACE	
FC36:	69 FD	140	ADC ##FD ; ESC-C OR D CHECK	
FC38:	90 2C	141	BCC LF ; C. DOWN	
FC3A:	F0 DE	142	BEG UP ; D. GO UP	

FC3C:	69	FD	143	ADC	##FD	:	ESC-E OR F CHECK
FC3E:	90	5C	144	BCC	CLREOL	:	E. CLEAR TO END OF LINE
FC40:	D0	E9	145	BNE	RTS4	:	ELSE NOT F. RETURN
FC42:	A4	24	146	CLREOP	LDY CH	:	ESC F IS CLR TO END OF PAGE
FC44:	A5	25	147		LDA CV		
FC46:	4B		148	CLEOP1	PHA		
FC47:	20	24	149		JSR VTABZ		
FC4A:	20	9E	150		JSR CLEOLZ		
FC4D:	A0	00	151		LDY ##00		
FC4F:	68		152		PLA		
FC50:	69	00	153		ADC ##00		
FC52:	C5	23	154		CHP WNDBTM		
FC54:	90	F0	155		BCC CLEOP1		
FC56:	B0	CA	156		BCS VTAB		
FC58:	A5	22	157	HOME	LDA WNDTOP		
FC5A:	B5	25	158		STA CV		
FC5C:	A0	00	159		LDY ##00		
FC5E:	B4	24	160		STY CH		
FC60:	F0	E4	161		BEG CLEOP1		
FC62:			162		PAGE		
FC62:	A9	00	163	CR	LDA ##00		
FC64:	B5	24	164		STA CH		
FC66:	E6	25	165	LF	INC CV		
FC68:	A5	25	166		LDA CV		
FC6A:	C5	23	167		CHP WNDBTM		
FC6C:	90	B6	168		BCC VTABZ		
FC6E:	C6	25	169		DEC CV		
FC70:	A5	22	170	SCROLL	LDA WNDTOP		
FC72:	4B		171		PHA		
FC73:	20	24	172		JSR VTABZ		
FC76:	A5	28	173	SCRL1	LDA BASL		
FC78:	B5	2A	174		STA BAS2L		
FC7A:	A5	29	175		LDA BASH		
FC7C:	B5	2B	176		STA BAS2H		
FC7E:	A4	21	177		LDY WNDWDTH		
FC80:	8B		178		DEY		
FC81:	68		179		PLA		
FC82:	69	01	180		ADC ##01		
FC84:	C5	23	181		CHP WNDBTM		
FC86:	B0	0D	182		BCS SCRL3		
FC88:	4B		183		PHA		
FC89:	20	24	184		JSR VTABZ		
FC8C:	B1	2B	185	SCRL2	LDA (BASL), Y		
FC8E:	91	2A	186		STA (BAS2L), Y		
FC90:	8B		187		DEY		
FC91:	10	F9	188		BPL SCRL2		
FC93:	30	E1	189		BMI SCRL1		
FC95:	A0	00	190	SCRL3	LDY ##00		
FC97:	20	9E	191		JSR CLEOLZ		
FC9A:	B0	B6	192		BCS VTAB		
FC9C:	A4	24	193	CLREOL	LDY CH		
FC9E:	A9	A0	194	CLEOLZ	LDA ##A0		
FCA0:	91	2B	195	CLEOLZ	STA (BASL), Y		
FCA2:	CB		196		INY		
FCA3:	C4	21	197		CPY WNDWDTH		
FCA5:	90	F9	198		BCC CLEOLZ		
FCA7:	60		199		RTS		
FCA8:	3B		200	WAIT	SEC		
FCA9:	4B		201	WAIT2	PHA		
FCAA:	E9	01	202	WAIT3	SBC ##01		
FCAC:	D0	FC	203		BNE WAIT3		
FCAE:	68		204		PLA		
FCAF:	E9	01	205		SBC ##01		
FCB1:	D0	F6	206		BNE WAIT2		
FCB3:	60		207		RTS		
FCB4:	E6	42	208	NXTA4	INC A4L		
FCB6:	D0	02	209		BNE NXTA1		
FCBB:	E6	43	210		INC A4H		
FCBA:	A5	3C	211	NXTA1	LDA A1L		
FCBC:	C5	3E	212		CHP A2L		
FCBE:	A5	3D	213		LDA A1H		
FCC0:	E5	3F	214		SBC A2H		
FCC2:	E6	3C	215		INC A1L		

FCC4:	D0 02	216		BNE RTS4B
FCC6:	E6 3D	217		INC A1H
FCCB:	60	218	RTS4B	RTS
FCC9:		219		PAGE
FCC9:	A0 4B	220	HEADR	LDY ##4B
FCCB:	20 DB FC	221		JSR ZERDLY
FCCE:	D0 F9	222		BNE HEADR
FCDO:	69 FE	223		ADC ##FE
FCD2:	30 F5	224		BCS HEADR
FCD4:	A0 21	225		LDY ##21
FCD6:	20 DB FC	226	WRBIT	JSR ZERDLY
FCD9:	C8	227		INY
FCDA:	C8	228		INY
FCDB:	8B	229	ZERDLY	DEY
FCDC:	D0 FD	230		BNE ZERDLY
FCDE:	90 05	231		BCC WRTAPE
FCEO:	A0 32	232		LDY ##32
FCE2:	8B	233	ONEDLY	DEY
FCE3:	D0 FD	234		BNE ONEDLY
FCE5:	AC 20 CO	235	WRTAPE	LDY TAPEDUT
FCEB:	A0 2C	236		LDY ##2C
FCEA:	CA	237		DEX
FCEB:	60	238		RTS
FCEC:	A2 0B	239	RDBYTE	LDX ##0B
FCEE:	4B	240	RDBYT2	PHA
FCEF:	20 FA FC	241		JSR RD2BIT
FCF2:	6B	242		PLA
FCF3:	2A	243		RDL A
FCF4:	A0 3A	244		LDY ##3A
FCF6:	CA	245		DEX
FCF7:	D0 F5	246		BNE RDBYT2
FCF9:	60	247		RTS
FCFA:	20 FD FC	248	RD2BIT	JSR RDBIT
FCFD:	8B	249	RDBIT	DEY
FCFE:	AD 60 CO	250		LDA TAPEIN
FD01:	45 2F	251		EOR LASTIN
FD03:	10 FB	252		BPL RDBIT
FD05:	45 2F	253		EOR LASTIN
FD07:	85 2F	254		STA LASTIN
FD09:	C0 80	255		CPY ##80
FD0B:	60	256		RTS
FD0C:	A4 24	257	RDKEY	LDY CH
FD0E:	31 2B	258		LDA (BASL), Y
FD10:	4B	259		PHA
FD11:	29 3F	260		AND ##3F
FD13:	09 40	261		ORA ##40
FD15:	91 2B	262		STA (BASL), Y
FD17:	6B	263		PLA
FD18:	6C 3B 00	264		JMP (KSWL)
FD1B:	E6 4E	265	KEYIN	INC RNDL
FD1D:	D0 02	266		BNE KEYIN2
FD1F:	E6 4F	267		INC RNDH
FD21:	2C 00 CO	268	KEYIN2	BIT KBD ; READ KEYBOARD
FD24:	10 F5	269		BPL KEYIN
FD26:	91 2B	270		STA (BASL), Y
FD2B:	AD 00 CO	271		LDA KBD
FD2B:	2C 10 CO	272		BIT KBDSTRB
FD2E:	60	273		RTS
FD2F:	20 0C FD	274	ESC	JSR RDKEY
FD32:	20 A5 FB	275		JSR ESCNEW
FD35:	20 0C FD	276	RDCHAR	JSR RDKEY
FD3B:	C9 9B	277		CMP ##9B
FD3A:	F0 F3	278		BEG ESC
FD3C:	60	279		RTS
FD3D:		280		PAGE
FD3D:	A5 32	281	NOTCR	LDA INVFLG
FD3F:	4B	282		PHA
FD40:	A9 FF	283		LDA ##FF
FD42:	85 32	284		STA INVFLG
FD44:	3D 00 02	285		LDA IN, X
FD47:	20 ED FD	286		JSR COUT
FD4A:	6B	287		PLA
FD4B:	85 32	288		STA INVFLG

FD4D	8D 00 02	289	LDA IN. X
FD50	C9 88	290	CMF ##8B
FD52	F0 1D	291	BEG BCKSPC
FD54	C9 98	292	CMF ##9B
FD56	F0 0A	293	BEG CANCEL
FD58	E0 FB	294	CPX ##FB
FD5A	90 03	295	BCC NOTCR1
FD5C	20 3A FF	296	JSR BELL
FD5F	E8	297	NOTCR1 INX
FD60	D0 13	298	BNE NXTCHAR
FD62	A9 DC	299	CANCEL LDA ##DC
FD64	20 ED FD	300	JSR COUT
FD67	20 BE FD	301	GETLNZ JSR CROUT
FD6A	A5 33	302	GETLN LDA PROMPT
FD6C	20 ED FD	303	JSR COUT
FD6F	A2 01	304	LDX ##01
FD71	8A	305	BCKSPC TXA
FD72	F0 F3	306	BEG GETLNZ
FD74	CA	307	DEX
FD75	20 35 FD	308	NXTCHAR JSR RDCHAR
FD78	C9 95	309	CMF ##95
FD7A	D0 02	310	BNE CAPTST
FD7C	B1 28	311	LDA (BASL), Y
FD7E	C9 E0	312	CAPTST CMF ##E0
FD80	90 02	313	BCC ADDINP
FD82	29 BF	314	AND ##DF ; SHIFT TO UPPER CASE
FD84	9D 00 02	315	ADDINP STA IN. X
FD87	C9 8D	316	CMF ##8D
FD89	D0 B2	317	BNE NOTCR
FD8B	20 9C FC	318	JSR CLREOL
FD8E	A9 8D	319	CRDUT LDA ##8D
FD90	D0 58	320	BNE COUT
FD92	A4 3D	321	PRA1 LDY A1H
FD94	A6 3C	322	LDX A1L
FD96	20 BE FD	323	PRYX2 JSR CROUT
FD99	20 40 F9	324	JSR PRNTYX
FD9C	A0 00	325	LDY ##00
FD9E	A9 AD	326	LDA ##AD
FDA0	4C ED FD	327	JMP COUT
FDA3		328	PAGE
FDA3	A5 3C	329	XAMB LDA A1L
FDA5	09 07	330	ORA ##07
FDA7	85 3E	331	STA A2L
FDA9	A5 3D	332	LDA A1H
FDA8	85 3F	333	STA A2H
FDA0	A5 3C	334	MODBCHK LDA A1L
FDAF	29 07	335	AND ##07
FDB1	D0 03	336	BNE DATAOUT
FDB3	20 92 FD	337	XAM JSR PRA1
FDB6	A9 A0	338	DATAOUT LDA ##A0
FDB8	20 ED FD	339	JSR COUT
FDBB	B1 3C	340	LDA (A1L), Y
FDBD	20 DA FD	341	JSR PRBYTE
FDC0	20 BA FC	342	JSR NXTA1
FDC3	90 EB	343	BCC MODBCHK
FDC5	60	344	RTS4C RTS
FDC6	4A	345	XAMPM LSR A
FDC7	90 EA	346	BCC XAM
FDC9	4A	347	LSR A
FDCA	4A	348	LSR A
FDCB	A5 3E	349	LDA A2L
FDCD	90 02	350	BCC ADD
FDCF	49 FF	351	EDR ##FF
FDD1	65 3C	352	ADD ADC A1L
FDD3	48	353	PHA
FDD4	A9 BD	354	LDA ##BD
FDD6	20 ED FD	355	JSR COUT
FDD9	68	356	PLA
FDDA	48	357	PRBYTE PLA
FDD8	4A	358	LSR A
FDDC	4A	359	LSR A
FDDD	4A	360	LSR A
FDD E	4A	361	LSR A

FDDF:	20 E5 FD	362		JSR PRHEXZ
FDE2:	68	363		PLA
FDE3:	29 OF	364	PRHEX	AND ##0F
FDE5:	09 80	365	PRHEXZ	ORA ##80
FDE7:	C9 BA	366		CMR ##8A
FDE9:	90 02	367		BCC COUT
FDEB:	69 06	368		ADC ##06
FDED:	6C 36 00	369	COUT	JMP (CSWL)
FDF0:	C9 A0	370	COUT1	CMR ##A0
FDF2:	90 02	371		BCC COUTZ
FDF4:	25 32	372		AND INVFLG
FDF6:	B4 35	373	COUTZ	STY YSAV1
FDF8:	4B	374		PHA
FDF9:	20 7B FB	375		JSR VIDWAIT ; GO CHECK FOR PAUSE
FDFC:	68	376		PLA
FDFD:	A4 35	377		LDY YSAV1
FDFE:	60	378		RTS
FE00:		379		PAGE
FE00:	C6 3A	380	BL1	DEC YSAV
FE02:	F0 9F	381		BEG XAMB
FE04:	CA	382	BLANK	DEX
FE05:	00 16	383		BNE SETMDZ
FE07:	C9 BA	384		CMR ##8A
FE09:	D0 8B	385		BNE XAMPB
FE0B:	85 31	386	STOR	STA MODE
FE0D:	A5 3E	387		LDA A2L
FE0F:	91 40	388		STA (A3L), Y
FE11:	E6 40	389		INC A3L
FE13:	D0 02	390		BNE RTSS
FE15:	E6 41	391		INC A3H
FE17:	60	392	RTSS	RTS
FE18:	A4 3A	393	SETMODE	LDY YSAV
FE1A:	89 FF 01	394		LDA IN-1, Y
FE1D:	85 31	395	SETMDZ	STA MODE
FE1F:	60	396		RTS
FE20:	A2 01	397	LT	LDX ##01
FE22:	85 3E	398	LT2	LDA A2L, X
FE24:	95 42	399		STA A4L, X
FE26:	95 44	400		STA A5L, X
FE28:	CA	401		DEX
FE29:	10 F7	402		3PL LT2
FE2B:	60	403		RTS
FE2C:	31 3C	404	MOVE	LDA (A1L), Y
FE2E:	91 42	405		STA (A4L), Y
FE30:	20 B4 FC	406		JSR NXTA4
FE33:	90 F7	407		BCC MOVE
FE35:	60	408		RTS
FE36:	B1 3C	409	VFY	LDA (A1L), Y
FE38:	D1 42	410		CMR (A4L), Y
FE3A:	F0 1C	411		BEG VFYOK
FE3C:	20 92 FD	412		JSR PRA1
FE3F:	B1 3C	413		LDA (A1L), Y
FE41:	20 DA FD	414		JSR PRBYTE
FE44:	A9 A0	415		LDA ##A0
FE46:	20 ED FD	416		JSR COUT
FE49:	A9 AB	417		LDA ##AB
FE4B:	20 ED FD	418		JSR COUT
FE4E:	B1 42	419		LDA (A4L), Y
FE50:	20 DA FD	420		JSR PRBYTE
FE53:	A9 A9	421		LDA ##A9
FE55:	20 ED FD	422		JSR COUT
FE58:	20 B4 FC	423	VFYOK	JSR NXTA4
FE5B:	90 D9	424		BCC VFY
FE5D:	60	425		RTS
FE5E:	20 75 FE	426	LIST	JSR A1PC
FE61:	A9 14	427		LDA ##14
FE63:	4B	428	LIST2	PHA
FE64:	20 D0 FB	429		JSR INSTDSP
FE67:	20 53 F9	430		JSR PCADJ
FE6A:	85 3A	431		STA PCL
FE6C:	B4 3B	432		STY PCH
FE6E:	6B	433		PLA
FE6F:	3B	434		SEC

FE70	E9 01	435	SBC	##01
FE72	D0 EF	436	BNE	LIST2
FE74	60	437	RTS	
FE75		438	PAGE	
FE75	8A	439	A1PC	TXA
FE76	F0 07	440	BEG	A1PCRTS
FE78	B5 3C	441	A1PCLP	LDA A1L, X
FE7A	95 3A	442	STA	PCL, X
FE7C	CA	443	DEX	
FE7D	10 F9	444	BPL	A1PCLP
FE7F	60	445	A1PCRTS	RTS
FE80	A0 3F	446	SETINV	LDY ##3F
FE82	D0 02	447	BNE	SETIFLG
FE84	A0 FF	448	SETNDRM	LDY ##FF
FE86	84 32	449	SETIFLG	STY INVFLG
FE88	60	450	RTS	
FE89	A9 00	451	SETKBD	LDA ##00
FE8B	B5 3E	452	INPORT	STA A2L
FE8D	A2 3B	453	INPRT	LDX ##KSWL
FE8F	A0 1B	454	LDY	##KEYIN
FE91	D0 0B	455	BNE	IOPRT
FE93	A9 00	456	SETVID	LDA ##00
FE95	B5 3E	457	OUTPORT	STA A2L
FE97	A2 36	458	OUTPRT	LDX ##CSWL
FE99	A0 F0	459	LDY	##COUT1
FE9B	A5 3E	460	IOPRT	LDA A2L
FE9D	29 0F	461	AND	##0F
FE9F	F0 06	462	BEG	IOPRT1
FEA1	09 C0	463	ORA	##IQADR/256
FEA3	A0 00	464	LDY	##00
FEA5	F0 02	465	BEG	IOPRT2
FEA7	A9 FD	466	IOPRT1	LDA ##COUT1/256
FEA9		467	IOPRT2	EGU +
FEA9	94 00	468	STY	LOC0, X ; \$94, \$00
FEAB	95 01	469	STA	LOC1, X ; \$95, \$01
FEAD	60	470	RTS	
FEAE	EA	471	NOP	
FEAF	EA	472	NOP	
FEB0	4C 00 E0	473	XBASIC	JMP BASIC
FEB3	4C 03 E0	474	BASCONT	JMP BASIC2
FEB6	20 75 FE	475	GO	JSR A1PC
FEB9	20 3F FF	476		JSR RESTORE
FEBC	6C 3A 00	477		JMP (PCL)
FEBF	4C D7 FA	478	REGZ	JMP REGDSP
FEC2	60	479	TRACE	RTS
FEC3		480	+ TRACE	IS GONE
FEC3	EA	481	NOP	
FEC4	60	482	STEPZ	RTS ; STEP IS GONE
FEC5	EA	483	NOP	
FEC6	EA	484	NOP	
FEC7	EA	485	NOP	
FEC8	EA	486	NOP	
FEC9	EA	487	NOP	
FEDA	4C FB 03	488	USR	JMP USRADR
FEDC		489	PAGE	
FEDD	A9 40	490	WRITE	LDA ##40
FEDF	20 C9 FC	491		JSR HEADR
FED2	A0 27	492	LDY	##27
FED4	A2 00	493	WR1	LDX ##00
FED6	41 3C	494	EOR	(A1L, X)
FED8	4B	495	PHA	
FED9	A1 3C	496	LDA	(A1L, X)
FEDB	20 ED FE	497	JSR	WRBYTE
FEDE	20 BA FC	498	JSR	NXTA1
FEE1	A0 1D	499	LDY	##1D
FEE3	6B	500	PLA	
FEE4	90 EE	501	BCC	WR1
FEE6	A0 22	502	LDY	##22
FEEB	20 ED FE	503	JSR	WRBYTE
FEEB	F0 4D	504	BEG	BELL
FEED	A2 10	505	WRBYTE	LDX ##10
FEEF	0A	506	WRBYT2	ASL A
FEF0	20 D6 FC	507	JSR	WRBIT

FEF3:	D0 FA	508	BNE	WRBYT2
FEF5:	60	509	RTS	
FEF6:	20 00 FE	510	JSR	BL1
FEF9:	68	511	PLA	
FEFA:	68	512	PLA	
FEFB:	D0 6C	513	BNE	MONZ
FEFD:	20 FA FC	514	READ	JSR RD2BIT
FF00:	A9 16	515	LDA	**16
FF02:	20 C9 FC	516	JSR	HEADR
FF05:	85 2E	517	STA	CHKSUM
FF07:	20 FA FC	518	JSR	RD2BIT
FF0A:	A0 24	519	RD2	LDY **24
FF0C:	20 FD FC	520	JSR	RDBIT
FF0F:	B0 F9	521	BCS	RD2
FF11:	20 FD FC	522	JSR	RDBIT
FF14:	A0 3B	523	LDY	**3B
FF16:	20 EC FC	524	RD3	JSR RDBYTE
FF19:	B1 3C	525	STA	(A1L. X)
FF1B:	45 2E	526	EDR	CHKSUM
FF1D:	B5 2E	527	STA	CHKSUM
FF1F:	20 BA FC	528	JSR	NXTA1
FF22:	A0 35	529	LDY	**35
FF24:	90 F0	530	BCC	RD3
FF26:	20 EC FC	531	JSR	RDBYTE
FF29:	C5 2E	532	CMP	CHKSUM
FF2B:	F0 0D	533	BEG	BELL
FF2D:	A9 C5	534	PRERR	LDA **C5
FF2F:	20 ED FD	535	JSR	COUT
FF32:	A9 D2	536	LDA	**D2
FF34:	20 ED FD	537	JSR	COUT
FF37:	20 ED FD	538	JSR	COUT
FF3A:	A9 B7	539	BELL	LDA **B7
FF3C:	4C ED FD	540	JMP	COUT
FF3F:		541	PAGE	
FF3F:	A5 48	542	RESTORE	LDA STATUS
FF41:	48	543	PHA	
FF42:	A5 45	544	LDA	A5H
FF44:	A6 46	545	RESTRI	LDX XREG
FF46:	A4 47	546	LDY	YREG
FF48:	28	547	PLP	
FF49:	60	548	RTS	
FF4A:	85 45	549	SAVE	STA A5H
FF4C:	86 46	550	SAV1	STX XREG
FF4E:	B4 47	551	STY	YREG
FF50:	08	552	PHP	
FF51:	68	553	PLA	
FF52:	85 48	554	STA	STATUS
FF54:	8A	555	TSX	
FF55:	86 49	556	STX	SPNT
FF57:	D8	557	CLD	
FF58:	60	558	RTS	
FF59:	20 84 FE	559	OLDRST	JSR SETNDRM
FF5C:	20 2F FB	560	JSR	INIT
FF5F:	20 93 FE	561	JSR	SETVID
FF62:	20 89 FE	562	JSR	SETKBD
FF65:		563	PAGE	
FF65:	D8	564	MON	CLD
FF66:	20 3A FF	565	JSR	BELL
FF69:	A9 AA	566	MONZ	LDA **AA
FF6B:	85 33	567	STA	PROMPT
FF6D:	20 67 FD	568	JSR	GETLN2
FF70:	20 C7 FF	569	JSR	ZMODE
FF73:	20 A7 FF	570	NXTITM	JSR GETNUM
FF76:	84 34	571	STY	YSAV
FF78:	A0 17	572	LDY	**17
FF7A:	88	573	CHRSRCH	DEY
FF7B:	30 EB	574	BMI	MON
FF7D:	D9 CC FF	575	CMP	CHRTBL. Y
FF80:	D0 FB	576	BNE	CHRSRCH
FF82:	20 BE FF	577	JSR	TOSUB
FF85:	A4 34	578	LDY	YSAV
FF87:	4C 73 FF	579	JMP	NXTITM
FF8A:	A2 03	580	DIG	LDX **03

FF8C	0A	581	ASL A	
FF8D	0A	582	ASL A	
FF8E	0A	583	ASL A	
FF8F	0A	584	ASL A	
FF90	0A	585	NXTBIT	ASL A
FF91	26 3E	586	ROL A2L	
FF93	26 3F	587	ROL A2H	
FF95	CA	588	DEX	
FF96	10 FB	589	DPL NXTBIT	
FF98	A5 31	590	NXTBAS	LDA MODE
FF9A	D0 06	591	BNE NXTBS2	
FF9C		592	*	
FF9C	B5 3F	593		LDA A2H. X
FF9E		594	*	
FF9E	95 3D	595		STA A1H. X
FFA0		596	*	
FFA0	95 41	597		STA A3H. X
FFA2	EB	598	NXTBS2	INX
FFA3	F0 F3	599		BEG NXTBAS
FFA5	D0 06	600		BNE NXTCHR
FFA7	A2 00	601	GETNUM	LDX ##00
FFA9	86 3E	602		STX A2L
FFAB	86 3F	603		STX A2H
FFAD	89 00 02	604	NXTCHR	LDA IN. Y
FFB0	C8	605		INY
FFB1	49 B0	606		EOR ##B0
FFB3	C9 0A	607		CMR ##0A
FFB5	90 D3	608		BCC DIC
FFB7	69 8B	609		ADC ##8B
FFB9	C9 FA	610		CMR ##FA
FFBB	B0 CD	611		BCS DIC
FFBD	60	612		RTS
FFBE	A9 FE	613	TOSUB	LDA #GD/256
FFC0	48	614		PHA
FFC1	89 E3 FF	615		LDA SUBTBL. Y
FFC4	48	616		PHA
FFC5	A5 31	617		LDA MODE
FFC7	A0 00	618	ZMODE	LDY ##00
FFC9	B4 31	619		STY MODE
FFCB	60	620		RTS
FFCC		621		PAGE
FFCC	BC	622	CHRTBL	DFB #BC
FFCD	D2	623		DFB #B2
FFCE	DE	624		DFB #BE
FFCF	D2	625		DFB #B2
FFD0	EF	626		DFB #EF
FFD1	C4	627		DFB #C4
FFD2	D2	628		DFB #B2
FFD3	A9	629		DFB #A9
FFD4	BB	630		DFB #BB
FFD5	A6	631		DFB #A6
FFD6	A4	632		DFB #A4
FFD7	06	633		DFB #06
FFD8	95	634		DFB #95
FFD9	07	635		DFB #07
FFDA	02	636		DFB #02
FFDB	05	637		DFB #05
FFDC	F0	638		DFB #F0
FFDD	0C	639		DFB #0C
FFDE	E8	640		DFB #E8
FFDF	93	641		DFB #93
FFE0	A7	642		DFB #A7
FFE1	C6	643		DFB #C6
FFE2	99	644		DFB #99
FFE3	B2	645	SUBTBL	DFB #B2
FFE4	C9	646		DFB #C9
FFE5	BE	647		DFB #BE
FFE6	C1	648		DFB #C1
FFE7	35	649		DFB #35
FFEB	8C	650		DFB #8C
FFE9	C4	651		DFB #C4
FFEA	96	652		DFB #96
FFEB	AF	653		DFB #AF

FFEC:	17	654	DFB	117
FFED:	17	655	DFB	117
FFEE:	28	656	DFB	12B
FFEF:	1F	657	DFB	11F
FFF0:	83	658	DFB	183
FFF1:	7F	659	DFB	17F
FFF2:	5D	660	DFB	15D
FFF3:	CC	661	DFB	1CC
FFF4:	85	662	DFB	185
FFF5:	FC	663	DFB	1FC
FFF6:	17	664	DFB	117
FFF7:	17	665	DFB	117
FFF8:	F5	666	DFB	1F5
FFF9:	03	667	DFB	103
FFFA:	FB 03	668	DW	NMI
FFFC:	62 FA	669	DW	RESET
FFFE:	40 FA	670	DW	IRG

ENDASH

MONITOR ROM LISTING

```
1 *****
2 *
3 *      APPLE II
4 *      SYSTEM MONITOR
5 *
6 *      COPYRIGHT 1977 BY
7 *      APPLE COMPUTER, INC.
8 *
9 *      ALL RIGHTS RESERVED
10 *
11 *      S. WOENIAK
12 *      A. BAUM
13 *
14 *****
15
16          TITLE          "APPLE II SYSTEM MONITOR"
17 LOC0     EPZ  S00
18 LOC1     EPZ  S01
19 WNDLFT   EPZ  S20
20 WNDWDTM  EPZ  S21
21 WNDTOP   EPZ  S22
22 WNDBTM   EPZ  S23
23 CH       EPZ  S24
24 CV       EPZ  S25
25 GBASL    EPZ  S26
26 GBASH    EPZ  S27
27 BASL     EPZ  S28
28 BASH     EPZ  S29
29 BAS2L    EPZ  S2A
30 BAS2H    EPZ  S2B
31 H2       EPZ  S2C
32 LMNEM    EPZ  S2C
33 RTNL     EPZ  S2C
34 V2       EPZ  S2D
35 RMNEM    EPZ  S2D
36 RTNH     EPZ  S2D
37 NASK     EPZ  S2E
38 CHRSM    EPZ  S2E
39 FORMAT   EPZ  S2E
40 LASTIN   EPZ  S2F
41 LENGTH   EPZ  S2F
42 SIGN     EPZ  S2F
43 COLOR    EPZ  S30
44 MODE     EPZ  S31
45 INVFLG   EPZ  S32
46 PROMPT   EPZ  S33
47 YSAV     EPZ  S34
48 YSAVL    EPZ  S35
49 CSWL     EPZ  S36
50 CSWH     EPZ  S37
51 XSWL     EPZ  S38
52 XSWH     EPZ  S39
53 PCL      EPZ  S3A
54 PCH      EPZ  S3B
55 XQT      EPZ  S3C
56 A1L      EPZ  S3D
57 A2L      EPZ  S3E
58 A2H      EPZ  S3F
59 A3L      EPZ  S40
60 A3H      EPZ  S41
61 A4L      EPZ  S42
62 A4H      EPZ  S43
63 A5L      EPZ  S44
64 A5H      EPZ  S45
65 ACC      EPZ  S45
66 XREG     EPZ  S46
67 YREG     EPZ  S47
68 STATUS   EPZ  S48
```

	69	SPNT	EPZ	549	
	70	RNDL	EPZ	54E	
	71	RNDH	EPZ	54F	
	72	ACL	EPZ	550	
	73	ACH	EPZ	551	
	74	XTNGL	EPZ	552	
	75	XTNDH	EPZ	553	
	76	AUXL	EPZ	554	
	77	AUXH	EPZ	555	
	78	PICK	EPZ	595	
	79	IN	ECU	50200	
	80	USRADR	ECU	503F0	
	81	NMI	ECU	503FB	
	82	IRQLC	ECU	503FE	
	83	IOADR	ECU	5C000	
	84	KBD	ECU	5C000	
	85	KBEGTRB	ECU	5C010	
	86	TAFEOUT	ECU	5C020	
	87	SPKR	ECU	5C030	
	88	TXTCLR	ECU	5C050	
	89	TXTSET	ECU	5C051	
	90	MIXCLR	ECU	5C052	
	91	MIXSET	ECU	5C053	
	92	LOWSCR	ECU	5C054	
	93	HISCR	ECU	5C055	
	94	LCRES	ECU	5C056	
	95	HIREC	ECU	5C057	
	96	TAPEIN	ECU	5C060	
	97	PADDL0	ECU	5C064	
	98	PTRIG	ECU	5C070	
	99	BASIC	ECU	5E000	
	100	BASIC2	ECU	5E003	
	101		ORG	5F000	
	102	PLOT	LSR	A	ROM START ADDRESS
F000:	4A		PHP		Y-COORD/2
F001:	0d		JSR	GBASCALC	SAVE LSB IN CARRY
F002:	20 47 F8	104	PLP		CALC BASE ADR IN COORD, H
F005:	26	105	LDA	#50F	RESTORE LSB FROM CARRY
F006:	A9 0F	106	BCC	ATMASK	MASK S0F IF EVEN
F008:	90 02	107	ADC	#5E0	
F00A:	69 E6	108	STA	MASK	MASK SFO IF ODD
F00C:	85 2E	109	LDA	(GBASL),Y	DATA
F00E:	81 26	110	EOH	COLOR	XOR COLOR
F010:	45 30	111	AND	MASK	AND MASK
F012:	25 2E	112	EOR	(GBASL),Y	XOR DATA
F014:	51 26	113	STA	(GBASL),Y	TO DATA
F016:	91 26	114	RTS		
F018:	60	115	JSR	PLOT	PLOT SQUARE
F019:	20 00 F8	116	CPY	H2	DONE?
F01C:	C4 2C	117	BCS	RTS1	YES, RETURN
F01E:	80 11	118	INY		NO, INCR INDEX (X-COORD)
F020:	C8	119	JSR	PLOT1	PLOT NEXT SQUARE
F021:	20 0E F8	120	BCC	HLINE1	ALWAYS TAKEN
F024:	90 F6	121	ADC	#501	NEXT Y-COORD
F026:	69 01	122	PHA		SAVE ON STACK
F028:	48	123	JSR	PLOT	PLOT SQUARE
F029:	20 00 F8	124	PLA		
F02C:	68	125	CMP	V2	DONE?
F02D:	C5 2D	126	BCC	VLINEZ	NO, LOOP.
F02F:	90 F5	127	RTS		
F031:	60	128	LDY	#52F	MAX Y, FULL SCRNR CLR
F032:	A0 2P	129	BNE	CLRSC2	ALWAYS TAKEN
F034:	D0 02	130	LDY	#527	MAX Y, TOP SCRNR CLR
F036:	A0 27	131	STY	V2	STORE AS BOTTOM COORD
F038:	84 2D	132	*		FOR VLINE CALLS
F03A:	A0 27	134	LDY	#527	RIGHTMOST X-COORD (COLUMN)
F03C:	A9 00	135	LDA	#50	TOP COORD FOR VLINE CALLS
F03E:	85 30	136	STA	COLOR	CLEAR COLOR (BLACK)
F040:	20 28 F8	137	JSR	VLINE	DRAW VLINE
F043:	88	138	DEY		NEXT LEFTMOST X-COORD
F044:	10 F6	139	BPL	CLRSC3	LOOP UNTIL DONE.
F046:	60	140	RTS		
F047:	48	141	PHA		FOR INPUT 000DEFGH
F048:	4A	142	LSR	A	

F049:	29 03	143	AND	#503	
F048:	09 04	144	ORA	#504	GENERATE GBASH=000001PG
F040:	05 27	145	STA	GBASH	
F04F:	08	146	PLA		AND GBASL=HDEDE000
F050:	29 18	147	AND	#518	
F052:	90 02	148	BCC	GBCALC	
F054:	69 7F	149	ADC	#57F	
F056:	05 26	150	STA	GBASL	
F058:	0A	151	ASL	A	
F059:	0A	152	ASL	A	
F05A:	05 26	153	ORA	GBASL	
F05C:	05 26	154	STA	GBASL	
F05E:	60	155	RTS		
F05F:	A5 30	156	LDA	COLOR	INCREMENT COLOR BY 3
F061:	18	157	CLC		
F062:	69 03	158	ADC	#503	
F064:	29 0F	159	AND	#50F	SETS COLOR=17*A MOD 16
F066:	05 30	160	STA	COLOR	
F068:	0A	161	ASL	A	BOTH HALF BYTES OF COLOR EQUAL
F069:	0A	162	ASL	A	
F06A:	0A	163	ASL	A	
F06B:	0A	164	ASL	A	
F06C:	05 30	165	ORA	COLOR	
F06E:	05 30	166	STA	COLOR	
F070:	60	167	RTS		
F071:	4A	168	LSR	A	READ SCREEN Y-COORD/2
F072:	08	169	PHP		SAVE LSB (CARRY)
F073:	20 47 P8	170	JSR	GBASCALC	CALC BASE ADDRESS
F076:	B1 26	171	LDA	(GBASL),Y	GET BYTE
F078:	26	172	PLP		RESTORE LSB FROM CARRY
F079:	90 04	173	BCC	RTMSKZ	IF EVEN, USE LO H
F07B:	4A	174	LSR	A	
F07C:	4A	175	LSR	A	
F07D:	4A	176	LSR	A	SHIFT HIGH HALF BYTE DOWN
F07E:	4A	177	LSR	A	
F07F:	29 0F	178	AND	#50F	MASK 4-BITS
F0d1:	60	179	RTS		
F0d2:	A6 3A	180	LDX	PCL	PRINT PCL,H
F0d4:	A4 38	181	LDY	PCH	
F0d6:	20 96 PD	182	JSR	PRYX2	
F0d9:	20 48 P9	183	JSR	PRBLNK	FOLLOWED BY A BLANK
F0dC:	A1 3A	184	LDA	(PCL,X)	GET OP CGDE
F0dE:	A6	185	TAY		
F0dF:	4A	186	LSR	A	EVEN/ODD TEST
F090:	90 09	187	BCC	IEVEN	
F092:	6A	188	ROR	A	SIT I TEST
F093:	80 10	189	BCS	ERR	XXXXXX11 INVALID OP
F095:	C5 A2	190	CMP	45A2	
F097:	F0 0C	191	BEQ	ERR	OPCODE 599 INVALID
F099:	29 0F	192	AND	#58F	MASK BITS
F09B:	4A	193	LSR	A	LSB INTO CARRY FOR L/R TEST
F09C:	AA	194	TAX		
F09D:	BD 62 P9	195	LDA	FMT1,X	GET FORMAT INDEX BYTE
F0A0:	20 79 P8	196	JSR	SCRAN2	R/L H-BYTE ON CARRY
F0A1:	00 04	197	BNE	GETFMT	
F0A5:	A0 80	198	LDY	#580	SUBSTITUTE #80 FOR INVALID OPS
F0A7:	A9 00	199	LDA	#80	SET PRINT FORMAT INDEX TO 0
F0A9:	AA	200	TAX		
F0AA:	8D A6 P9	201	LDA	FMT2,X	INDEX INTO PRINT FORMAT TABLE
F0AD:	85 2E	202	STA	FORMAT	SAVE FOR ADR FIELD FORMATTING
F0AF:	29 03	203	AND	#503	MASK FOR 2-BIT LENGTH
F0B1:	85 2F	204	*	(P=1 BYTE, 1=2	BYTE, 2=3 BYTE)
F0B3:	98	205	STA	LENGTH	
F0B4:	29 8F	207	TYA		OPCODE
F0B6:	AA	208	AND	#58F	MASK FOR 1XXX1010 TEST
F0B7:	98	209	TAX		SAVE IT
F0B8:	A0 03	210	TYA		OPCODE TO A AGAIN
F0BA:	50 0A	211	LDY	#503	
F0BC:	F0 0D	212	CFX	#58A	
F0BE:	4A	213	BEC	MNNDX3	
F0BF:	90 08	214	LSR	A	
F0C1:	4A	215	BCC	MNNDX3	FORM INDEX INTO MNEMONIC TABLE
			LSR	A	

F8C2:	4A	216	MNNDX2	LSR	A	1) 1XXXX1G10=>00101XXX
F8C3:	09 20	217		ORA	#S20	2) XXXYYYU1=>00111XXX
F8C5:	88	218		DEY		3) XXXYYY10=>00110XXX
F8C6:	DU FA	219		BNE	MNNDX2	4) XXXYY100=>00100XXX
F8C8:	C6	220		INY		5) XXXXX00J=>000XXXXX
F8C9:	88	221	MNNDX1	DEY		
F8CA:	DU F2	222		BNE	MNNDX1	
F8CC:	60	223		RTS		
F8CD:	FF FF FF	224		DFB	\$FF,\$FF,\$FF	
F8D0:	20 82 F8	225	INSTDSP	JSR	INSD31	GEN FMT, LEN BYTES
F8D3:	40	226		PHA		SAVE MNEMONIC TABLE INDEX
F8D4:	B1 JA	227	PRNTOP	LDA	(PCL),Y	
F8D6:	20 DA FD	228		JSR	PRBYTE	
F8D9:	A2 01	229		LDX	#S01	PRINT 2 BLANKS
F8DB:	20 4A F9	230	PRNTBL	JSR	PRBL2	
F8DE:	C4 2F	231		CFY	LENGTH	PRINT INST (1-3 BYTES)
F8E0:	C8	232		INY		IN A 12 CHR FIELD
F8E1:	90 F1	233		BCC	PRNTOP	
F8E3:	A2 03	234		LDX	#S03	CHAR COUNT FOR MNEMONIC PRINT
F8E5:	C0 04	235		CFY	#S04	
F8E7:	90 F2	236		BCC	PRNTBL	
F8E9:	68	237		PLA		RECOVER MNEMONIC INDEX
F8EA:	A6	238		TAY		
F8EB:	B9 CU F9	239		LDA	MNEHL,Y	
F8EE:	85 2C	240		STA	LNMEM	FETCH 3-CHAR MNEMONIC
F8F0:	B9 00 FA	241		LDA	MNEML,Y	(PACKED IN 2-BYTES)
F8F3:	85 2D	242		STA	RNMEM	
F8F5:	A9 00	243	PRMN1	LDA	#S00	
F8F7:	A0 05	244		LDY	#S05	
F8F9:	06 2D	245	PRMN2	ASL	RMNEM	SHIFT 5 BITS OF
F8FB:	26 2C	246		ROL	LNMEM	CHARACTER INTO A
F8FD:	2A	247		ROL	A	(CLEARS CARRY)
F8FE:	88	248		DEY		
F8FF:	DU F8	249		BNE	PRMN2	
F901:	69 3F	250		ADC	#S8F	ADD "?" OFFSET
F903:	20 ED FD	251		JSR	COUT	OUTPUT A CHAR OF MNEM
F906:	CA	252		DEX		
F907:	D0 EC	253		BNE	PRMN1	
F909:	20 46 F9	254		JSR	PRBLNK	OUTPUT 3 BLANKS
F90C:	A4 2F	255		LDY	LENGTH	
F90E:	A2 06	256		LDX	#S06	CNT FOR 6 FORMAT BITS
F910:	Ev 03	257	PRADR1	CPX	#S03	
F912:	F0 1C	258		BEQ	PRADR5	IF X=3 THEN ADDR.
F914:	06 2E	259	PRADR2	ASL	FORMAT	
F916:	90 0E	260		BCC	PRADR3	
F918:	BE 03 F1	261		LDA	CHAR1-1,X	
F91B:	20 ED FD	262		JSR	COUT	
F91E:	BD 99 F9	263		LDA	CHAR2-1,X	
F921:	F0 03	264		BEQ	PRADR3	
F923:	20 ED FD	265		JSR	COUT	
F926:	CA	266	PRADR3	DEX		
F927:	D0 E7	267		BNE	PRADR1	
F929:	00	268		RTS		
F92A:	88	269	PRADR4	DEY		
F92B:	30 E7	270		BMI	FRADR2	
F92D:	20 DA FD	271		JSR	PRBYTE	
F930:	A5 2E	272	PRADR5	LDA	FORMAT	
F932:	C5 E8	273		CRP	#SE8	HANDLE REL ADR MODE
F934:	B1 JA	274		LDA	(PCL),Y	SPECIAL (PRINT TARGET,
F936:	90 F2	275		BCC	PRADR4	NOT OFFSET)
F938:	20 56 F9	276	RELADR	JSR	PCADJ3	
F93B:	AA	277		TAX		PCL,PCH+OFFSET+1 TO A,Y
F93C:	E6	278		INX		
F93D:	D0 01	279		BNE	PRNTYX	+1 TO Y,X
F93F:	C6	280		INY		
F940:	98	281	PRNTYX	TYA		
F941:	20 DA FD	282	PRNTAX	JSR	PRBYTE	OUTPUT TARGET ADR
F944:	8A	283	PRNTX	TXA		OF BRANCH AND RETURN
F945:	4C DA FD	284		JMP	PRBYTE	
F948:	A2 03	285	PRBLNK	LDX	#S03	BLANK COUNT
F94A:	A9 A0	286	PRBL2	LDA	#SA0	LOAD A SPACE
F94C:	20 ED FD	287	PRBL3	JSR	COUT	OUTPUT A BLANK
F94F:	CA	288		DEX		

F950:	D0 F8	289		BNE	PRBL2	LOOP UNTIL COUNT=0
F952:	60	290		RTS		
F953:	38	291	PCADJ	SEC		
F954:	A5 2F	292	PCADJ2	LDA	LENGTH	0=1-BYTE,1=2-BYTE,
F956:	A4 3B	293	PCADJ3	LDY	PCB	2=1-BYTE
F958:	AA	294		TAX		
F959:	10 01	295		BPL	PCADJ4	TEST DISPLACEMENT SIGN
F95B:	88	296		DEY		(FOR REL BRANCH)
F95C:	65 3A	297	PCADJ4	ADC	PCL	EXTEND NEG BY DECR PCB
F95E:	90 01	298		BCC	RTS2	PCL+LENGTH(OR DISPL)+1 TO A
F960:	C6	299		INY		CARRY INTO Y (PCB)
F961:	60	300		RTS		
		301		*	FMT1 BYTES:	XXXXXXXXY0 INSTRS
		302		*	IF Y=0	THEN LEFT HALF BYTE
		303		*	IF Y=1	THEN RIGHT HALF BYTE
		304		*		(X=INDEX)
F962:	04 20 54					
F965:	30 0D	305	FMT1	DFB	\$04,\$20,\$54,\$	
F967:	80 04 90					
F96A:	03 22	306		DFB	\$80,\$04,\$90,\$	
F96C:	54 33 0D					
F96F:	80 04	307		DFB	\$54,\$33,\$0D,\$	
F971:	90 04 20					
F974:	54 33	308		DFB	\$90,\$04,\$20,\$	
F976:	0D 80 04					
F979:	90 04	309		DFB	\$0D,\$80,\$04,\$	
F97B:	20 54 3B					
F97D:	0C 80	310		DFB	\$20,\$54,\$3B,\$	
F980:	04 90 00					
F983:	22 44	311		DFB	\$0C,\$80,\$04,\$	
F985:	33 0D C8					
F988:	44 00	312		DFB	\$22,\$44,\$	
F98A:	11 22 44					
F98D:	33 0D	313		DFB	\$33,\$0D,\$C8,\$	
F98F:	C8 44 59					
F992:	01 22	314		DFB	\$11,\$22,\$44,\$	
F994:	44 33 0D					
F997:	80 04	315		DFB	\$C8,\$44,\$59,\$	
F999:	90 01 22					
F99C:	44 33	316		DFB	\$44,\$33,\$0D,\$	
F99E:	0D 80 04					
F9A1:	90	317		DFB	\$90,\$01,\$22,\$	
F9A2:	26 31 87					
F9A5:	9A	318		DFB	\$0D,\$80,\$04,\$	
F9A6:	00	319	FMT2	DFB	\$26,\$31,\$87,\$	XXXXXXXXY01 INSTR'S
F9A7:	21	320		DFB	\$00	ERR
F9A8:	81	321		DFB	\$21	IMM
F9A9:	82	322		DFB	\$81	Z-PAGE
F9AA:	00	323		DFB	\$82	ABS
F9AB:	00	324		DFB	\$00	IMPLIED
F9AC:	59	325		DFB	\$00	ACCUMULATOR
F9AD:	4D	326		DFB	\$59	(ZPAG,X)
F9AE:	91	327		DFB	\$4D	(ZPAG),Y
F9AF:	92	328		DFB	\$91	ZPAG,X
F9B0:	86	329		DFB	\$92	ABS,X
F9B1:	4A	330		DFB	\$86	ABS,Y
F9B2:	85	331		DFB	\$4A	(ABS)
F9B3:	9D	332		DFB	\$85	ZPAG,Y
F9B4:	AC A9 AC			DFB	\$9D	RELATIVE
F9B7:	A3 A6 A4	333	CHAR1	ASC	" ,) , * (\$"	
F9BA:	D9 00 D8					
F9BD:	A4 A4 00	334	CHAR2	DFB	\$D9,\$00,\$D8,\$	
		335	*CHAR2:	"Y",0,"X\$"\$,0		
		336	*	MNEM	IS OF FORM:	
		337	*	(A)	XXXXXXXX00	
		338	*	(B)	XXYY100	
		339	*	(C)	IXXX1010	
		340	*	(D)	XXYYYY10	
		341	*	(E)	XXXXXXXX01	
		342	*		(X=INDEX)	
F9C0:	1C 8A 1C					
F9C3:	23 5D 8B	343	MNEM	DFB	\$1C,\$8A,\$1C,\$	
F9C6:	1B A1 9D					

F9C9:	8A 1D 23 344		DFB	\$1B,\$A1,\$9D,\$	
F9CC:	9D 2B 1D				
F9CF:	A1 00 29 345		DFB	\$9D,\$8B,\$1D,\$	
F9D2:	19 AE 69				
F9D5:	A8 19 23 346		DFB	\$19,\$AE,\$69,\$	
F9D8:	24 53 1B				
F9DB:	23 24 53 347		DFB	\$24,\$53,\$1B,\$	
F9DE:	19 A1 348		DFB	\$19,\$A1	(A) FORMAT ABOVE
F9E0:	00 1A 5B				
F9E3:	5B A5 69 349		DFB	\$00,\$1A,\$5B,\$	
F9E6:	24 24 350		DFB	\$24,\$24	(B) FORMAT
F9E8:	AE AE A8				
F9EB:	AD 29 00 351		DFB	\$AE,\$AE,\$A8,\$	
F9EE:	7C 00 352		DFB	\$7C,\$00	(C) FORMAT
F9F0:	15 9C 6D				
F9F3:	9C A5 69 353		DFB	\$15,\$9C,\$6D,\$	
F9F6:	29 53 354		DFB	\$29,\$53	(D) FORMAT
F9F8:	84 13 34				
F9FB:	11 A5 69 355		DFB	\$84,\$13,\$34,\$	
F9FE:	23 A0 356		DFB	\$23,\$A0	(E) FORMAT
FA00:	D8 62 5A				
FA03:	48 26 62 357	MNEMR	DFB	\$D8,\$62,\$5A,\$	
FA06:	54 86 54				
FA09:	44 C8 54 358		DFB	\$94,\$88,\$54,\$	
FA0C:	68 44 E6				
FA0F:	94 00 B4 359		DFB	\$68,\$44,\$E6,\$	
FA12:	08 84 74				
FA15:	B4 28 6E 360		DFB	\$08,\$84,\$74,\$	
FA18:	74 F4 CC				
FA1B:	4A 72 F2 361		DFB	\$74,\$F4,\$CC,\$	
FA1E:	A4 8A 362		DFB	\$A4,\$8A	(A) FORMAT
FA20:	00 AA A2				
FA23:	A2 74 74 363		DFB	\$00,\$AA,\$A2,\$	
FA26:	74 72 364		DFB	\$74,\$72	(B) FORMAT
FA28:	44 68 B2				
FA2B:	32 B2 00 365		DFB	\$44,\$68,\$B2,\$	
FA2E:	22 00 366		DFB	\$22,\$00	(C) FORMAT
FA30:	1A 1A 26				
FA33:	26 72 72 367		DFB	\$1A,\$1A,\$26,\$	
FA36:	88 C8 368		DFB	\$88,\$C8	(D) FORMAT
FA38:	C4 CA 26				
FA3B:	48 44 44 369		DFB	\$C4,\$CA,\$26,\$	
FA3E:	A2 C8 370		DFB	\$A2,\$C8	(E) FORMAT
FA40:	FF FF FF 371		DFB	\$FF,\$FF,\$FF	
FA43:	20 00 F8 372	STEP	JSR	INSTDISP	DISASSEMBLE ONE INST
FA46:	68 373		PLA		AT (PCL,H)
FA47:	85 2C 374		STA	RTHL	ADJUST TO USER
FA49:	66 375		PLA		STACK. SAVE
FA4A:	85 2D 376		STA	RTHH	RTH ADR.
FA4C:	A2 06 377		LDX	#006	
FA4E:	8D 10 PB 378	XQINIT	LDA	INITBL-1,X	INIT XEQ AREA
FA51:	95 3C 379		STA	XQT,X	
FA53:	CA 380		DEX		
FA54:	D0 F8 381		BNE	XQINIT	
FA56:	A1 3A 382		LDA	(PCL,X)	USER OPCODE BYTE
FA58:	F0 42 383		BEQ	XBRK	SPECIAL IF BREAK
FA5A:	A4 2F 384		LDY	LENGTH	LEN FROM DISASSEMBLY
FA5C:	C9 20 385		CMP	#520	
FA5E:	F0 59 386		BEQ	XJSR	HANDLE JSR, RTS, JMP,
FA60:	C9 60 387		CMP	#560	JMP (), RTI SPECIAL
FA62:	F0 45 388		BEQ	XRTS	
FA64:	C9 4C 389		CMP	#54C	
FA66:	F0 5C 390		BEQ	XJMP	
FA68:	C9 6C 391		CMP	#56C	
FA6A:	F0 59 392		BEQ	XJMPAT	
FA6C:	C9 40 393		CMP	#540	
FA6E:	F0 35 394		BEQ	XRTI	
FA70:	29 1F 395		AND	#51F	
FA72:	49 14 396		OR	#514	
FA74:	C9 04 397		CMP	#504	COPY USER INST TO XEQ AREA
FA76:	F0 02 398		BEQ	XQ2	WITH TRAILING NOPS
FA78:	B1 3A 399	XQ1	LDA	(PCL),Y	CHANGE REL BRANCH
FA7A:	99 3C 00 400	XQ2	STA	XQIN2,Y	DISP TO 4 FOR

FA7D:	86	401	DEY		JMP TO BRANCH ON
FA7E:	10 F8	402	BPL	XQ1	NBRANCH FROM XEQ.
FA80:	20 JF FF	403	JSR	RESTORE	RESTORE USER REG CONTENTS.
FA81:	4C 3C 00	404	JMP	XQTNZ	XEQ USER OP FROM RAM
FA86:	85 45	405	STA	ACC	(RETURN TO NBRANCH)
FA8d:	98	406	PLA		
FA89:	48	407	PHA		**IRQ HANDLER
FA8A:	0A	408	ASL	A	
FA8B:	0A	409	ASL	A	
FA8C:	0A	410	ASL	A	
FA8D:	30 03	411	BMI	BREAK	TEST FOR BREAK
FA8F:	6C PE 03	412	JMP	(IRQLOC)	USER ROUTINE VECTOR IN RAM
FA92:	28	413	PLP		
FA93:	20 4C PF	414	JSR	SAV1	SAVE REG'S ON BREAK
FA9e:	98	415	PLA		INCLUDING PC
FA97:	85 3A	416	STA	PCL	
FA99:	98	417	PLA		
FA9A:	05 JB	418	STA	PCH	
FA9C:	20 82 F6	419	JSR	INSDS1	PRINT USER PC.
FA9F:	20 DA FA	420	JSR	RGDSP1	AND REG'S
FAA2:	4C 65 PF	421	JMP	MON	GO TO MONITOR
FAA5:	18	422	XRTI	CLC	
FAA6:	98	423	PLA		SIMULATE RTI BY EXPECTING
FAA7:	85 48	424	STA	STATUS	STATUS FROM STACK, THEN RTS
FAA9:	98	425	XRTS	PLA	RTS SIMULATION
FAAA:	85 3A	426	STA	PCL	EXTRACT PC FROM STACK
FAAC:	98	427	PLA		AND UPDATE PC BY 1 (LEN+G)
FAAD:	05 JB	428	PCINC2	STA	PCH
FAAF:	A5 2F	429	PCINC3	LDA	LENGTH
FAB1:	20 56 F9	430	JSR	PCADJ3	UPDATE PC BY LEN
FAB4:	84 3B	431	STY	PCH	
FAB6:	18	432	CLC		
FAB7:	90 14	433	BCC	NEWPCL	
FAB9:	18	434	XJSR	CLC	
FABA:	20 54 P9	435	JSR	PCADJ2	UPDATE PC AND PUSH
FABD:	AA	436	TAX		GN2C STACK FOR
FABE:	98	437	TYA		JSR SIMULATE
FABF:	48	438	PHA		
FAC0:	0A	439	TXA		
FAC1:	48	440	PHA		
FAC2:	A0 02	441	LDY	#S02	
FAC4:	18	442	XJMP	CLC	
FAC5:	81 3A	443	XJMPAT	LDA	(PCL),Y
FAC7:	AA	444	TAX		LOAD PC FOR JMP,
FAC8:	98	445	DEY		(JMP) SIMULATE.
FAC9:	81 3A	446	LDA	(PCL),Y	
FACB:	86 3B	447	STX	PCH	
FACC:	05 3A	448	STX	PCL	
FACP:	80 P3	449	BCC	XJMP	
FAD1:	A5 2D	450	RTNJMP	LDA	RTNH
FAD3:	48	451	PHA		
FAD4:	A5 2C	452	LDA	RTNL	
FAD6:	48	453	PHA		
FAD7:	20 8E FD	454	REGDSP	JSR	CROUT
FADA:	A9 45	455	RGDSP1	LDA	#ACC
FADC:	05 40	456		STA	A3L
FADe:	A9 00	457		LDA	#ACC/256
FAE0:	85 41	458		STA	A3H
FAE2:	A2 FB	459		LDX	#SFB
FAE4:	A9 A0	460	RDSP1	LDA	#SA0
FAE6:	20 ED FD	461		JSR	COUT
FAE9:	8D 1E FA	462		LDA	RTBL-SFB,X
FAEc:	20 ED FD	463		JSR	COUT
FAEP:	A9 BD	464		LDA	#SBD
FAF1:	20 ED FD	465		JSR	COUT
FAF4:	B5 4A	466		LDA	ACC+S,X
FAF6:	20 DA FD	467		JSR	PRBYTE
FAF9:	E8	468		INX	
FAFA:	30 E8	469		BMI	RDSP1
FAFC:	60	470		RTS	
FAFD:	18	471	BRANCH	CLC	BRANCH TAKEN,
FAFE:	A0 01	472		LDY	#S01
FBO0:	B1 3A	473		LDA	(PCL),Y
					ADD LEN+2 TO PC

FB02:	20	56	F9	474		JSR	PCADJ3	
FB03:	85	JA		475		STA	PCL	
FB07:	98			476		TYA		
FB08:	3a			477		SEC		
FB09:	80	A2		478		BCS	PCINC2	
FB0B:	20	4A	FF	479	NBRNCH	JSR	SAVE	NORMAL RETURN AFTER
FB0E:	38			480		SEC		REQ USER OP
FB0F:	80	9E		481		BCS	PCINC3	GO UPDATE FC
FB11:	EA			482	INITBL	NOP		
FB12:	EA			483		NOP		DUMMY FILL FOR
FB13:	4C	0B	FB	484		JMP	NBRNCH	REQ AREA
FB16:	4C	FD	FA	485		JMP	BRANCH	
FB19:	C1			486	RTBL	DFB	SC1	
FB1A:	D8			487		DFB	SD8	
FB1B:	D9			488		DFB	SD9	
FB1C:	D0			489		DFB	SD0	
FB1D:	D3			490		DFB	SD3	
FB1E:	AD	70	C0	491	PREAD	LDA	PTIRIG	TRIGGER PADDLES
FB21:	A0	00		492		LDY	#000	INIT COUNT
FB23:	EA			493		NOP		COMPENSATE FOR 1ST COUNT
FB24:	EA			494		NOP		
FB25:	8C	04	C0	495	PREAD2	LDA	PADDL0,X	COUNT Y-REG EVERY
FB26:	10	04		496		BPL	RTS2D	12 USEC
FB2A:	C8			497		INY		
FB2B:	00	F8		498		BNE	PREAD2	EXIT AT 255 MAX
FB2D:	88			499		DEY		
FB2E:	00			500	RTS2D	RTS		
FB2F:	A9	00		501	INIT	LDA	#000	CLR STATUS FOR DEBUG
FB31:	85	48		502		STA	STATUS	SOFTWARE
FB33:	AD	56	C0	503		LDA	LORES	
FB36:	AD	54	C0	504		LDA	LOWSCR	INIT VIDEO MODE
FB39:	AD	51	C0	505	SETTXT	LDA	TXTSET	SET FOR TEXT MODE
FB3C:	A9	00		506		LDA	#000	FULL SCREEN WINDOW
FB3E:	F0	0B		507		3EQ	SETWND	
FB40:	AD	50	C0	508	SETGR	LDA	TXTCLR	SET FOR GRAPHICS MODE
FB43:	AD	53	C0	509		LDA	MIXSET	LOWER 4 LINES AS
FB46:	20	36	F8	510		JSR	CLRTCP	TEXT WINDOW
FB49:	A9	14		511		LDA	#514	
FB4B:	85	22		512	SETWND	STA	WNDTOP	SET FOR 40 COL WINDOW
FB4D:	A9	00		513		LDA	#000	TOP IN A-REG,
FB4F:	85	20		514		STA	WNDLFT	BTM AT LINE 24
FB51:	A9	28		515		LDA	#528	
FB53:	85	21		516		STA	WNDWDTH	
FB55:	A9	18		517		LDA	#518	
FB57:	85	23		518		STA	WNBDM	VTAB TO ROW 23
FB59:	A9	17		519		LDA	#517	
FB5B:	85	25		520	TABV	STA	CV	VTABS TO ROW IN A-REG
FB5D:	4C	22	FC	521		JMP	VTAB	
FB60:	20	34	FB	522	MULPM	JSR	MD1	ABS VAL OF AC AUX
FB63:	A0	10		523	MUL	LDY	#510	INDEX FOR 16 BITS
FB65:	A5	50		524	MUL2	LDA	ACL	ACX * AUX * XTND
FB67:	4A			525		LSR	A	TO AC, XTND
FB68:	90	0C		526		BCC	MUL4	IF NO CARRY,
FB6A:	18			527		CLC		NO PARTIAL PROD.
FB6B:	A2	FE		528		LDX	#5FE	
FB6D:	B5	54		529	MUL3	LDA	XTNDL+2,X	ADD MPLCND (AUX)
FB6F:	75	56		530		ADC	AUXL+2,X	TO PARTIAL PROD
FB71:	95	54		531		STA	XTNDL+2,X	(XTND).
FB73:	E8			532		INX		
FB74:	C0	F7		533		BNE	MUL3	
FB76:	A2	03		534	MUL4	LDX	#503	
FB78:	76			535	MUL5	DFB	#576	
FB79:	50			536		DFB	#550	
FB7A:	CA			537		DEX		
FB7B:	10	FB		538		BPL	MUL5	
FB7D:	88			539		DEY		
FB7E:	C0	C5		540		BNE	MUL2	
FB80:	60			541		RTS		
FB81:	20	A4	FB	542	DIVPM	JSR	MD1	ABS VAL OF AC, AUX.
FB84:	A0	10		543	DIV	LDY	#510	INDEX FOR 16 BITS
FB86:	06	50		544	DIV2	ASL	ACL	
FB88:	26	51		545		ROL	ACH	
FB8A:	26	52		546		ROL	XTNDL	XTNC/AUX

FB8C:	26 53	547	ROL	XTNDH	TO AC.
FB8E:	38	548	SEC		
FB8F:	A5 52	549	LDA	XTNDL	
FB91:	E5 54	550	SBC	AUXL	NO TO XTND.
FB93:	AA	551	TAX		
FB94:	A5 53	552	LDA	XTNDH	
FB96:	E5 55	553	SBC	AUXH	
FB98:	90 06	554	BCC	DIVJ	
FB9A:	86 52	555	STX	XTNDL	
FB9C:	85 53	556	STA	XTNDH	
FB9E:	E6 50	557	INC	ACL	
FBA0:	84	558	DEY		
FBA1:	D6 E3	559	BNE	DIV2	
FBA3:	66	560	RTS		
FBA4:	A0 00	561	LDY	#S00	ABS VAL OF AC, AUX
FBA6:	84 2F	562	STY	SIGN	WITH RESULT SIGN
FBA8:	A2 54	563	LDX	#AUXL	IN LSB OF SIGN.
FBAA:	20 AF	564	JSR	MD2	
FBAD:	A2 50	565	LDX	#ACL	
FBAF:	B5 01	566	MD2	LDA	LOC1,X
FBB1:	10 0D	567	BPL	MDRTS	X SPECIFIES AC OR AUX
FBB3:	38	568	SEC		
FBB4:	98	569	MD3	TYA	
FBB5:	F5 00	570	SBC	LOC0,X	COMPL SPECIFIED REG
FBB7:	95 00	571	STA	LOC0,X	IF NEG.
FBB9:	98	572	TYA		
FBBA:	F5 01	573	SBC	LOC1,X	
FBBC:	95 01	574	STA	LOC1,X	
FBBE:	E6 2F	575	INC	SIGN	
FBC0:	60	576	MDRTS	RTS	
FBC1:	48	577	BASCALC	PHA	CALC BASE ADR IN BASL,H
FBC2:	4A	578	LSR	A	FOR GIVEN LINE NO.
FBC3:	29 03	579	AND	#S03	0<=LINE NO.<=517
FBC5:	09 04	580	ORA	#S04	ARG=000ABCDE, GENERATE
FBC7:	05 29	581	STA	BASH	BASH=0000100
FBC9:	68	582	PLA		AND
FBCA:	29 18	583	AND	#S18	BASL=EABAB000
FBCB:	90 02	584	BCC	BSCLC2	
FBCD:	69 7F	585	ADC	#S7F	
FBD0:	85 26	586	MD3	STA	BASL
FBD2:	0A	587	ASL	A	
FBD4:	0A	588	ASL	A	
FBD4:	05 28	589	ORA	BASL	
FDE6:	85 28	590	STA	BASL	
FDE8:	60	591	RTS		
FDD9:	C9 87	592	BELL1	CMP	#S87
FDEB:	D0 12	593	BNE	RTS2B	BELL CHAR? (CNTRL-G)
FDED:	A9 40	594	LDA	#S40	NO,RETURN
FDF1:	20 A8	595	JSR	WAIT	DELAY .01 SECONDS
FDF2:	A0 C0	596	LDY	#S0C	
FDF4:	A9 0C	597	LDA	#S0C	TOGGLE SPEAKER AT
FDF6:	20 A8	598	JSR	WAIT	1 KHZ FOR .1 SEC.
FDF9:	AD 30	599	LDA	SPRR	
FDEC:	68	600	DEY		
FDEE:	D0 F5	601	BNE	BELL2	
FDF1:	60	602	MD3	RTS2B	
FDF0:	A4 24	603	STOADV	LDY	CH
FDF2:	91 26	604	STA	(BASL),Y	CURSER H INDEX TO Y-REG
FDF4:	E6 24	605	ADVANCE	INC	CH
FDF6:	A5 24	606	LDA	CH	STOR CHAR IN LINE
FDF8:	C5 21	607	CMP	WINDWTH	INCREMENT CURSER H INDEX
FDFA:	B0 66	608	BCS	CR	(MOVE RIGHT)
FDFC:	60	609	RTS3	RTS	BEYOND WINDOW WIDTH?
FDFD:	C9 A0	610	VIDOUT	CMP	YES CR TO NEXT LINE
FDFE:	B0 EF	611	CMP	#SAU	NO,RETURN
FC01:	A6	612	BCS	STOADV	CONTROL CHAR?
FC02:	10 8C	613	TAY		NO,OUTPUT IT.
FC04:	C9 8D	614	BPL	STOADV	INVERSE VIDEO?
FC06:	F0 5A	615	CMP	#S8D	YES, OUTPUT IT.
FC08:	C9 8A	616	BCR	CR	CR?
FC0A:	F0 5A	617	CMP	#S8A	YES.
FC0C:	C9 88	618	BEQ	LF	LINE FEED?
FC0E:	D0 C9	619	CMP	#S88	IF SO, DO IT.
			BNE	BELL1	BACK SPACE? (CNTRL-H)
					NO, CHECK FOR BELL.

FC10:	C6 24	620	BS	DEC	CH	DECREMENT CURSER H INDEX
FC12:	10 58	621		BFL	RTS3	IF POS, OK. ELSE MOVE UP
FC14:	A5 21	622		LDA	WINDWTH	SET CH TO WINDWTH-1
FC16:	65 24	623		STA	CH	
FC18:	C6 24	624		DEC	CH	(RIGHTMOST SCREEN POS)
FC1A:	A5 22	625	UP	LDA	WINDTOP	CURSER V INDEX
FC1C:	C5 25	626		CMP	CV	
FC1E:	B0 08	627		BCS	RTS4	IF TOP LINE THEN RETURN
FC20:	C6 25	628		DEC	CV	DECR CURSER V-INDEX
FC22:	A5 25	629	VTAB	LDA	CV	GET CURSER V-INDEX
FC24:	20 C1	630	VTABZ	JSR	BASCALC	GENERATE BASE ADDR
FC27:	65 20	631		ADC	WINDLFT	ADD WINDOW LEFT INDEX
FC29:	85 28	632		STA	BASL	TO BASL
FC2B:	66	633		RTS		
FC2C:	49 C0	634		EOR	#90	ESC?
FC2E:	F0 28	635		BEQ	HOME	IF SO, DO MORE AND CLEAR
FC30:	69 FD	636		ADC	#5FD	ESC-A OR B CHECK
FC32:	90 C0	637		BCC	ADVANCE	A, ADVANCE
FC34:	F0 DA	638		BEQ	BS	B, BACKSPACE
FC36:	69 FD	639		ADC	#5FD	ESC-C OR D CHECK
FC38:	90 2C	640		BCC	LF	C, DOWN
FC3A:	F0 DE	641		BEQ	UP	D, GO UP
FC3C:	69 FD	642		ADC	#5FD	ESC-E OR F CHECK
FC3E:	90 5C	643		BCC	CLREOL	E, CLEAR TO END OF LINE
FC40:	D0 59	644		BNE	RTS4	NOT F, RETURN
FC42:	A4 24	645	CLREOP	LDY	CH	CURSOR H TO Y INDEX
FC44:	A5 25	646		LDA	CV	CURSOR V TO A-REGISTER
FC46:	48	647	CLEOP1	PHA		SAVE CURRENT LINE ON STK
FC47:	20 24	648	PC	JSR	VTABZ	CALC BASE ADDRESS
FC4A:	20 9E	649	PC	JSR	CLEOLZ	CLEAR TO EOL, SET CARRY
FC4D:	A0 00	650		LDY	#500	CLEAR FROM H INDEX=0 FOR REST
FC4F:	66	651		PLA		INCREMENT CURRENT LINE
FC50:	69 00	652		ADC	#500	(CARRY IS SET)
FC52:	C5 23	653		CMP	WINDBTM	DONE TO BOTTOM OF WINDOW?
FC54:	90 F0	654		BCC	CLEOP1	NO, KEEP CLEARING LINES
FC56:	B0 CA	655		BCS	VTAB	YES, TAB TO CURRENT LINE
FC58:	A5 22	656	HOME	LDA	WINDTOP	INIT CURSOR V
FC5A:	65 25	657		STA	CV	AND H-INDICES
FC5C:	A0 00	658		LDY	#500	
FC5E:	04 24	659		STY	CH	THEN CLEAR TO END OF PAGE
FC60:	F0 E4	660		BEQ	CLEOP1	
FC62:	A9 00	661	CR	LDA	#500	CURSOR TO LEFT OF INDEX
FC64:	65 24	662		STA	CH	(RET CURSOR (#=))
FC66:	E6 25	663	LF	INC	CV	INCR CURSOR V(DOWN 1 LINE)
FC68:	A5 25	664		LDA	CV	
FC6A:	C5 23	665		CMP	WINDBTM	OFF SCREEN?
FC6C:	70 86	666		BCC	VTABZ	NO, SET BASE ADDR
FC6E:	C6 25	667		DEC	CV	DECR CURSOR V(BACK TO BOTTOM)
FC70:	A5 22	668	SCROLL	LDA	WINDTOP	START AT TOP OF SCRL WNDW
FC72:	48	669		PHA		
FC73:	20 24	670	PC	JSR	VTABZ	GENERATE BASE ADDRESS
FC76:	A5 26	671	SCRL1	LDA	BASL	COPY BASL,H
FC78:	85 2A	672		STA	BAS2L	TO BAS2L,H
FC7A:	A5 29	673		LDA	BASH	
FC7C:	85 2B	674		STA	BAS2H	
FC7E:	A4 21	675		LDY	WINDWTH	INIT Y TO RIGHTMOST INDEX
FC80:	48	676		DEY		OF SCROLLING WINDOW
FC81:	66	677		PLA		
FC82:	69 01	678		ADC	#901	INCR LINE NUMBER
FC84:	C5 23	679		CMP	WINDBTM	DONE?
FC86:	80 0D	680		BCS	SCRL3	YES, FINISH
FC88:	48	681		PHA		
FC89:	20 24	682	PC	JSR	VTABZ	FORM BASL,H (BASE ADDR)
FC8C:	81 28	683	SCRL2	LDA	(BASL),Y	MOVE A CHR UP ON LINE
FC8E:	91 2A	684		STA	(BAS2L),Y	
FC90:	66	685		DEY		NEXT CHAR OF LINE
FC91:	10 P9	686		BPL	SCRL2	
FC93:	30 E1	687		BMI	SCRL1	NEXT LINE
FC95:	A0 00	688	SCRL3	LDY	#500	CLEAR BOTTOM LINE
FC97:	20 9E	689	PC	JSR	CLEOLZ	GET BASE ADDR FOR BOTTOM LINE
FC9A:	B0 66	690		BCS	VTAB	CARRY IS SET
FC9C:	A4 24	691	CLREOL	LDY	CH	CURSOR H INDEX
FC9E:	A9 A0	692	CLEOLZ	LDA	#9A0	

PCA0:	91 26	693	CLEOL2	STA (BASL),Y	STORE BLANKS FROM 'HERE'
PCA2:	C6	694		INY	TO END OF LINES (WNDWDTH)
PCA3:	C4 21	695		CPY WNDWDTH	
PCA5:	90 F9	696		BCC CLEOL2	
PCA7:	60	697		RTS	
PCA8:	38	698	WAIT	SEC	
PCA9:	48	699	WAIT2	PHA	
PCAA:	E9 01	700	WAIT3	SBC #901	
PCAC:	D0 FC	701		BNE WAIT3	1.0204 USEC
PCAE:	68	702		PLA	(13+2712*A+512*A*A)
PCAF:	E9 01	703		SBC #901	
PCB1:	D0 F6	704		BNE WAIT2	
PCB3:	60	705		RTS	
PCB4:	E6 42	706	NXTA4	INC A4L	INCR 2-BYTE A4
PCB6:	D0 02	707		BNE NXTA1	AND A1
PCB8:	E6 43	708		INC A4H	
PCBA:	A5 3C	709	NXTA1	LDA A1L	INCR 2-BYTE A1.
PCBC:	C5 3E	710		CMP A2L	
PCBE:	A5 3D	711		LDA A1H	AND COMPARE TO A2
PCCF:	E5 3F	712		SBC A2H	
PCC2:	E6 3C	713		INC A1L	(CARRY SET IF >=)
PCC4:	D0 02	714		BNE RTS48	
PCC6:	E6 3D	715		INC A1H	
PCC8:	60	716	RTS48	RTS	
PCC9:	A0 48	717	HEADR	LDY #548	WRITE A*256 'LONG 1'
PCCB:	D0 DB FC	718		JSR ZERDLY	HALF CYCLES
PCCF:	D0 F9	719		BNE HEADR	(650 USEC EACH)
PCG0:	69 FE	720		ADC #9FE	
PCD2:	80 F5	721		BCC HEADR	THEN A 'SHORT 0'
PCD4:	A0 21	722		LDY #921	(400 USEC)
PCD6:	20 DB FC	723	WRBIT	JSR ZERDLY	WRITE TWO HALF CYCLES
PCD9:	C8	724		INY	OF 250 USEC ('0')
PCDA:	C8	725		INY	OR 500 USEC ('0')
PCDB:	88	726	ZERDLY	DEY	
PCDC:	D0 FD	727		BNE ZERDLY	
PCDE:	90 05	728		BCC WRTAPE	Y IS COUNT FOR
PCDF:	A0 32	729		LDY #532	TIMING LOOP
PCE2:	88	730	ONEDLY	DEY	
PCE3:	C0 FD	731		BNE ONEDLY	
PCE5:	AC 20 C0	732	WRTAPE	LDY TAPEOUT	
PCE8:	A0 2C	733		LDY #92C	
PCEA:	CA	734		DEX	
PCEB:	60	735		RTS	
PCEC:	A2 68	736	RDBYTE	LDX #906	8 BITS TO READ
PCEE:	48	737	RDBYT2	PHA	READ TWO TRANSITIONS
PCEF:	20 FA FC	738		JSR RD2BIT	(FIND EDGE)
PCF2:	68	739		PLA	
PCF3:	2A	740		ROL A	NEXT BIT
PCF4:	A0 3A	741		LDY #53A	COUNT FOR SAMPLES
PCF6:	CA	742		DEX	
PCF7:	D0 F5	743		BNE RDBYT2	
PCF9:	60	744		RTS	
PCFA:	20 FD FC	745	RD2BIT	JSR RDBIT	
PCFD:	88	746	RDBIT	DEY	DECR Y UNTIL
PCFE:	AD 60 C0	747		LDA TAPEIN	TAPE TRANSITION
FD01:	45 2F	748		EOR LASTIN	
FD03:	10 F6	749		BPL RCBIT	
FD05:	45 2F	750		EOR LASTIN	
FD07:	85 2F	751		STA LASTIN	
FD09:	C0 80	752		CPY #880	SET CARRY ON Y-REG.
FD0B:	60	753		RTS	
FD0C:	A4 24	754	RDKEY	LDY CH	
FD0E:	B1 26	755		LDA (BASL),Y	SET SCREEN TO FLASH
FD10:	48	756		PHA	
FD11:	29 3F	757		AND #53F	
FD13:	09 10	758		ORA #540	
FD15:	91 26	759		STA (BASL),Y	
FD17:	68	760		PLA	
FD18:	6C 38 00	761		JMP (KSWL)	GO TO USER KEY-IN
FD1B:	E6 4E	762	KEYIN	INC RNDL	
FD1D:	C0 02	763		BNE KEYIN2	INCR RND NUMBER
FD1F:	E6 4F	764		INC RNDH	
FD21:	2C 00 C0	765	KEYIN2	BIT R8D	KEY DOWN?

FD24:	10 F5	766	BFL	KEYIN	LOOP
FD26:	91 26	767	STA	(BASL),Y	REPLACE FLASHING SCREEN
FD28:	AD 00 C0	768	LDA	R0D	GET KEYCODE
FD29:	2C 10 C0	769	BIT	#RDSTRB	CLR KEY STROBE
FD2E:	60	770	RTS		
FD2F:	20 0C FD	771	JSR	R0KEY	GET KEYCODE
FD32:	20 2C FC	772	JSR	ESC1	HANDLE ESC FUNC.
FD35:	20 0C FD	773	JSR	R0KEY	READ KEY
FD38:	C9 98	774	CMP	#S9B	ESC?
FD3A:	F0 F3	775	BEC	ESC	YES, DON'T RETURN
FD3C:	60	776	RTS		
FD3D:	A5 32	777	LDA	INVPLG	
FD3F:	48	778	PHA		
FD40:	A9 FF	779	LDA	#SFF	
FD42:	85 32	780	STA	INVPLG	ECHO USER LINE
FD44:	BD 00 02	781	LDA	IN,X	NON INVERSE
FD47:	20 ED FC	782	JSR	COUT	
FD4A:	68	783	PLA		
FD4B:	85 32	784	STA	INVPLG	
FD4D:	BD 00 02	785	LDA	IN,X	
FD :	C9 88	786	CMP	#S88	CHECK FOR EDIT KEYS
FD52:	F0 1D	787	BEC	BCKSPC	BS, CTRL-X.
FD54:	C9 98	788	CMP	#S98	
FD56:	F0 0A	789	BEC	CANCEL	
FD58:	E0 F8	790	CFX	#SF8	MARGIN?
FD5A:	90 03	791	BCC	NOTCRI	
FD5C:	20 3A FF	792	JSR	BELL	YES, SOUND BELL
FD5F:	E6	793	INX		ADVANCE INPUT INDEX
FD60:	D0 13	794	BNE	NXTCHAR	
FD62:	A9 DC	795	LDA	#SDC	BACKSLASH AFTER CANCELLED LTN
FD64:	20 ED FD	796	JSR	COUT	
FD67:	20 8E FD	797	JSR	CROUT	OUTPUT CR
FD6A:	A5 33	798	LDA	PROMPT	
FD6C:	20 ED FD	799	JSR	COUT	OUTPUT PROMPT CHAR
FD6F:	A2 01	800	LDX	#S01	INIT INPUT INDEX
FD71:	8A	801	TXA		WILL BACKSPACE TO 0
FD72:	F0 F3	802	BEC	GETLN2	
FD74:	CA	803	DEX		
FD75:	20 35 FD	804	JSR	R0CHAR	
FD78:	C9 95	805	CMP	#PICK	USE SCREEN CHAR
FD7A:	D0 02	806	BNE	CAPTST	FOR CTRL-U
FD7C:	B1 28	807	LDA	(BASL),Y	
FD7E:	C9 E0	808	CMP	#SE0	
FD80:	90 02	809	BCC	ADDINP	CONVERT TO CAPS
FD82:	29 DF	810	AND	#SDF	
FD84:	90 00 02	811	STA	IN,X	ADD TO INPUT BUF
FD87:	C9 8D	812	CMP	#S8D	
FD89:	D0 02	813	BNE	NOTCR	
FD8D:	20 9C FC	814	JSR	CLREOL	CLR TO EOL IF CR
FD8E:	A9 8D	815	LDA	#S8D	
FD90:	D0 5B	816	BNE	COUT	
FD92:	A4 3D	817	LDY	A1H	PRINT CR,A1 IN HEX
FD94:	A6 3C	818	LDX	A1L	
FD96:	20 8E FD	819	JSR	CROUT	
FD99:	20 40 F9	820	JSR	PRNTYX	
FD9C:	A0 00	821	LDY	#S00	
FD9E:	A9 AD	822	LDA	#SAD	PRINT '-'
FDA0:	4C ED FD	823	JMP	COUT	
FDA3:	A5 3C	824	LDA	A1L	
FDA5:	09 07	825	ORA	#S07	SET TO FINISH AT
FDA7:	85 3E	826	STA	A2L	MOD 8=)
FDA9:	A5 3D	827	LDA	A1H	
FDA8:	85 3F	828	STA	A2H	
FDA0:	A5 3C	829	LDA	A1L	
FDAF:	29 07	830	AND	#S07	
FDB1:	D0 03	831	BNE	DATAOUT	
FDB3:	20 92 FD	832	JSR	PRA1	
FDB6:	A9 A0	833	LDA	#SA0	
FDB8:	20 ED FD	834	JSR	COUT	OUTPUT BLANK
FDBB:	B1 3C	835	LDA	(A1L),Y	
FDBD:	20 DA FD	836	JSR	FRBYTE	OUTPUT BYTE IN HEX
FDC0:	20 BA FC	837	JSR	hKTA1	

FDC3:	90 E5	838		BCC	MOD8CHK	CHECK IF TIME TO,
FDC5:	60	839	RTS4C	RTS		PRINT ADDR
FDC6:	4A	840	XANPM	LSR	A	DETERMINE IF MCN
FDC7:	90 EA	841		BCC	XAM	MODE IS XAM
FDC9:	4A	842		LSR	A	ADD, OR SUB
FDCA:	4A	843		LSR	A	
FDCB:	A5 3E	844		LDA	A2L	
FDCD:	90 02	845		BCC	ADD	
FDCF:	49 FF	846		EOR	#5FF	SUB: FORM 2'S COMPLEMENT
FDD1:	65 3C	847	ADD	ADC	ALL	
FDD3:	46	848		PHA		
FDD4:	A9 BD	849		LDA	#5BD	
FDD6:	20 ED FD	850		JSR	COUT	PRINT '=', THEN RESULT
FDD9:	66	851		PLA		
FDDA:	46	852	PRBYTE	PHA		PRINT BYTE AS 2 HEX
FDDB:	4A	853		LSR	A	DIGITS, DESTROYS A-REG
FDDC:	4A	854		LSR	A	
FDDD:	4A	855		LSR	A	
FDEE:	4A	856		LSR	A	
FDEF:	20 E5 FD	857		JSR	PRHEX2	
FDE2:	68	858		PLA		
FDE3:	29 0F	859	PRHEX	AND	#50F	PRINT HEX DIG IN A-REG
FDE5:	09 30	860	PRHEX2	CRA	#5B0	LSB'S
FDE7:	C9 3A	861		CMF	#5BA	
FDE9:	90 02	862		BCC	COUT	
FDEB:	69 06	863		ADC	#506	
FDED:	6C 36 00	864	CGUT	JMP	(CSWL)	VECTOR TO USER OUTPUT ROUTINE
FDF0:	C9 A0	865	COUT1	CMF	#5A0	
FDF2:	70 02	866		DCC	COUT2	DON'T OUTPUT CTRL'S INVERSE
FDF4:	25 32	867		AND	INVLG	MASK WITH INVERSE FLAG
FDF6:	84 35	868	COUT2	STY	YSAV1	SAV Y-REG
FDF8:	48	869		PHA		SAV A-REG
FDF9:	20 FD FB	870		JSR	VIDOUT	OUTPUT A-REG AS ASCII
FDFC:	66	871		PLA		RESTORE A-REG
FDFE:	A4 35	872		LDY	YSAV1	AND Y-REG
FDF7:	60	873		RTS		THEN RETURN
FE00:	C6 34	874	BL1	DEC	YSAV	
FE02:	F0 0F	875		SEQ	XAM8	
FE04:	CA	876	BLANK	DEX		BLANK TO MON
FE05:	D0 16	877		BNE	SETMD2	AFTER BLANK
FE07:	C9 3A	878		CMF	#5BA	DATA STORE MODE?
FE09:	D0 0B	879		BNE	XANPM	NO, XAM, ADD OR SUB
FE0B:	85 31	880	STOR	STA	MODE	KEEP IN STORE MODE
FE0D:	A5 3E	881		LDA	A2L	
FE0F:	91 40	882		STA	(A3L),Y	STORE AS LOW BYTE AS (A3)
FE11:	E6 40	883		INC	A3L	
FE13:	D0 02	884		BNE	RTS5	INCR A3, RETURN
FE15:	E6 41	885		INC	A3H	
FE17:	60	886	RTS5	RTS		
FE18:	A4 34	887	SETMODE	LDY	YSAV	SAVE CONVERTED ':', '+',
FE1A:	D9 FF 01	888		LDA	IN-1,Y	'-', '.' AS MODE.
FE1D:	85 31	889	SETMD2	STA	MODE	
FE1F:	60	890		RTS		
FE20:	A2 01	891	LT	LDX	#501	
FE22:	B5 3E	892	LT2	LDA	A2L,X	COPY A2 (2 BYTES) TO
FE24:	95 42	893		STA	A4L,X	A4 AND A5
FE26:	95 44	894		STA	A5L,X	
FE28:	CA	895		DEX		
FE29:	10 F7	896		BPL	LT2	
FE2B:	60	897		RTS		
FE2C:	B1 3C	898	MOVE	LDA	(A1L),Y	MOVE (A1 TO A2) TO
FE2E:	91 42	899		STA	(A4L),Y	(A4)
FE30:	20 B4 FC	900		JSR	NXIA4	
FE33:	90 F7	901		BCC	MOVE	
FE35:	60	902		RTS		
FE36:	B1 3C	903	VFY	LDA	(A1L),Y	VERIFY (A1 TO A2) WITH
FE38:	D1 42	904		CMF	(A4L),Y	(A4)
FE3A:	F0 1C	905		BEC	VFYOK	
FE3C:	20 92 FD	906		JSR	PRA1	
FE3F:	B1 3C	907		LDA	(A1L),Y	
FE41:	20 DA FD	908		JSR	PRBYTE	
FE44:	A9 A0	909		LDA	#5A0	
FE46:	20 ED FD	910		JSR	COUT	

FE49:	A9 A8	911		LDA	#SA6	
FE4B:	20 ED	912		JSR	COUT	
FE4E:	B1 42	913		LDA	(A4L),Y	
FE50:	20 DA	914		JSR	PHBYTE	
FE53:	A9 A9	915		LDA	#SA9	
FE55:	20 8D	916		JSR	COUT	
FE58:	20 34	917	VFYOK	JSR	NXTA4	
FE5B:	90 D9	918		BCC	VFY	
FE5D:	60	919		RTS		
FE5E:	20 75	920	LIST	JSR	A1PC	MOVE A1 (2 BYTES) TO
FE61:	A9 14	921		LDA	#S14	PC IF SPEC'D AND
FE63:	48	922	LIST2	PHA		DISSEMBLE 20 INSTR
FE64:	20 D0	923		JSR	INSTDSP	
FE67:	20 53	924		JSR	PCADJ	ADJUST PC EACH INSTR
FE6A:	45 JA	925		STA	PCL	
FE6C:	84 JB	926		STY	PCB	
FE6E:	68	927		PLA		
FE6F:	38	928		SEC		
FE70:	E9 01	929		SBC	#S01	NEXT OF 20 INSTAL
FE72:	D0 EF	930		BNE	LIST2	
FE74:	60	931		RTS		
FE75:	8A	932	A1PC	TXA		IF USER SPEC'D ADR
FE76:	F0 07	933		BEQ	A1PCRTS	COPY FROM A1 TO PC
FE78:	85 3C	934	A1PCLP	LDA	A1L,X	
FE7A:	95 JA	935		STA	PCL,X	
FE7C:	CA	936		DEX		
FE7D:	10 F9	937		BFL	A1PCLP	
FE7F:	60	938	A1PCRTS	RTS		
FE80:	A0 3F	939	SETINV	LDY	#S3F	SET FOR INVERSE VID
FE82:	D0 02	940		BNE	SETIFLG	VIA COUT1
FE84:	A0 FF	941	SETNORM	LDY	#SFF	SET FOR NORMAL VID
FE86:	84 32	942	SETIFLG	STY	INVFLG	
FE88:	60	943		RTS		
FE89:	A9 00	944	SETKBD	LDA	#S00	SIMULATE PORT #0 INPUT
FE8B:	85 3E	945	INPORT	STA	A2L	SPECIFIED (KEYIN ROUTINE)
FE8D:	A2 38	946	INPRT	LDX	#KSWL	
FE8F:	A0 1B	947		LDY	#KEYIN	
FE91:	D0 08	948		BNE	IOPRT	
FE93:	A9 00	949	SETVID	LDA	#S00	SIMULATE PORT #0 OUTPUT
FE95:	85 3E	950	OUTPORT	STA	A2L	SPECIFIED (COUT1 ROUTINE)
FE97:	A2 36	951	OUTPRT	LDX	#CSWL	
FE99:	A0 F0	952		LDY	#COUT1	
FE9B:	A5 3E	953	IOPRT	LDA	A2L	SET RAM IN/OUT VECTORS
FE9D:	29 0F	954		AND	#S0F	
FE9F:	F0 06	955		BEQ	IOPRT1	
FEA1:	09 C0	956		ORA	#IOADR/256	
FEA3:	A0 00	957		LDY	#S00	
FEA5:	F0 02	958		BEQ	IOPRT2	
FEA7:	A9 FD	959	IOPRT1	LDA	#COUT1/256	
FEA9:	94 00	960	IOPRT2	STY	LCC0,X	
FEAB:	95 01	961		STA	LOC1,X	
FEAD:	60	962		RTS		
FEAE:	EA	963		NOP		
FEAF:	EA	964		NOP		
FEB0:	4C 00	965	XBASIC	JMP	BASIC	TO BASIC WITH SCRATCH
FEB1:	4C 03	966	BASCONT	JMP	BASIC2	CONTINUE BASIC
FEB6:	20 75	967	GO	JSR	A1PC	ADR TO PC IF SPEC'D
FEB9:	20 3F	968		JSR	RESTORE	RESTORE META REGS
FEBC:	6C 3A	969		JMP	(PCL)	GO TO USER SUBR
FEBF:	4C 07	970	REGZ	JMP	REGDSP	TO REG DISPLAY
FEC2:	C6 34	971	TRACE	DEC	YSAV	
FEC4:	20 75	972	STEPZ	JSR	A1PC	ADR TO PC IF SPEC'D
FEC7:	4C 03	973		JMP	STEP	TAKE ONE STEP
FECA:	4C F8	974	USR	JMP	USRADR	TO USR SUBR AT USRADR
FECD:	A9 40	975	WRITE	LDA	#S40	
FECF:	20 C9	976		JSR	HEADER	WRITE 10-SEC HEADER
FED2:	A0 27	977		LDY	#S27	
FED4:	A2 00	978	#R1	LDX	#S00	
FED6:	41 3C	979		SHR	(A1L,X)	
FED8:	48	980		PHA		
FED9:	A1 3C	981		LDA	(A1L,X)	

FE0B:	20	ED	FC	982		JSR	WRBYTE	
FE0E:	20	BA	FC	983		JSR	NXTA1	
FE11:	A0	1D		984		LDY	#S1D	
FE13:	60			985		PLA		
FE14:	90	EE		986		BCC	WR1	
FE16:	A0	22		987		LDY	#S22	
FE18:	20	ED	FE	988		JSR	WRBYTE	
FE1B:	F0	4D		989		BEQ	BELL	
FE1D:	A2	10		990	WRBYTE	LDX	#S10	
FE1F:	0A			991	WRBYT2	ASL	A	
FE20:	20	D6	FC	992		JSR	WRBIT	
FE23:	00	FA		993		BNE	WRBYT2	
FE25:	60			994		RTS		
FE26:	20	00	FE	995	CRMON	JSR	BL1	HANDLE CR AS BLANK
FE29:	68			996		PLA		THEN POP STACK
FE2A:	68			997		PLA		AND RIN TO MCN
FE2B:	00	6C		998		BNE	MONZ	
FE2D:	20	FA	FC	999	READ	JSR	RD2BIT	FIND TAPEIN EDGE
FE2E:	A9	16		1000		LDA	#S16	
FE2F:	20	C9	FC	1001		JSR	HEADR	DELAY 3.5 SECONDS
FE30:	85	2E		1002		STA	CHKSUM	INIT CHKSUM=FFF
FE31:	20	FA	FC	1003		JSR	RD2BIT	FIND TAPEIN EDGE
FE32:	A0	24		1004	RD2	LDY	#S24	LOOK FOR SYNC BIT
FE33:	20	FD	FC	1005		JSR	RDBIT	(SHORT 0)
FE34:	B0	F9		1006		BCC	RD2	LOOP UNTIL FOUND
FE35:	20	FD	FC	1007		JSR	RDBIT	SKIP SECOND SYNC H-CYCLE
FE36:	A0	3B		1008		LDY	#S3B	INDEX FOR 0/1 TEST
FE37:	20	EC	FC	1009	RD3	JSR	RDBYTE	READ A BYTE
FE38:	81	3C		1010		STA	(A1L,X)	STORE AT (A1)
FE39:	45	2E		1011		EOR	CHKSUM	
FE3A:	85	2E		1012		STA	CHKSUM	UPDATE RUNNING CHKSUM
FE3B:	20	BA	FC	1013		JSR	NXTA1	INCR A1, COMPARE TO A2
FE3C:	A0	35		1014		LDY	#S35	COMPENSATE 0/1 INDEX
FE3D:	90	F0		1015		BCC	RD3	LOOP UNTIL DONE
FE3E:	20	EC	FC	1016		JSR	RDBYTE	READ CHKSUM BYTE
FE3F:	C5	2E		1017		CMP	CHKSUM	
FE40:	F0	0D		1018		BEQ	BELL	GOOD, SOUND BELL AND RETURN
FE41:	A9	C5		1019	PRERR	LDA	#SC5	
FE42:	20	ED	FD	1020		JSR	COUT	PRINT "ERR", THEN BELL
FE43:	A9	D2		1021		LDA	#SD2	
FE44:	20	ED	FD	1022		JSR	COUT	
FE45:	20	ED	FD	1023		JSR	COUT	
FE46:	A9	47		1024	BELL	LDA	#S47	OUTPUT BELL AND RETURN
FE47:	4C	ED	FD	1025		JMP	COUT	
FE48:	A5	48		1026	RESTORE	LDA	STATUS	RESTORE 6502 REG CONTENTS
FE49:	48			1027		PHA		USED BY DEBUG SOFTWARE
FE4A:	A5	45		1028		LDA	ACC	
FE4B:	A6	46		1029	RESTRI	LDX	XREG	
FE4C:	A4	47		1030		LDY	YREG	
FE4D:	26			1031		PLP		
FE4E:	60			1032		RTS		
FE4F:	85	45		1033	SAVE	STA	ACC	SAVE 6502 REG CONTENTS
FE50:	86	46		1034	SAV1	STX	XREG	
FE51:	84	47		1035		STY	YREG	
FE52:	08			1036		PHF		
FE53:	68			1037		PLA		
FE54:	85	48		1038		STA	STATUS	
FE55:	BA			1039		TBX		
FE56:	86	49		1040		STX	SPNT	
FE57:	D8			1041		CLD		
FE58:	60			1042		RTS		
FE59:	20	84	FE	1043	RESET	JSR	SETNORM	SET SCREEN MODE
FE5A:	20	2F	FB	1044		JSR	INIT	AND INIT KBD/SCREEN
FE5B:	20	93	FE	1045		JSR	SETVID	AS I/O DEV'S
FE5C:	20	89	FE	1046		JSR	SETKBD	
FE5D:	D8			1047	MCN	CLD		MUST SET HEX MODE!
FE5E:	20	3A	FF	1048		JSR	BELL	
FE5F:	A9	AA		1049	MONZ	LDA	#SAA	** PROMPT FOR MCN
FE60:	85	33		1050		STA	PROMPT	
FE61:	20	57	FD	1051		JSR	GETLN2	READ A LINE
FE62:	20	C7	FF	1052		JSR	ZMODE	CLEAR MCN MODE, SCAN IDX
FE63:	20	A7	FF	1053	NXTITH	JSR	GETNUM	GET ITEM, NON-HEX
FE64:	84	34		1054		STY	YSAV	CHAR IN A-REG

FF78:	A6 17	1055	LDY #S17	X-REG=0 IF NO HEX INPUT
FF7A:	88	1056	DEY	
FF7B:	30 E8	1057	BMI MON	NOT FOUND, GO TO MON
FF7D:	D9 CC FF	1058	CMP CHRTBL,Y	FIND CMND CHAR IN TEL
FF80:	D0 F8	1059	BNE CHRSRCH	
FF82:	20 BE FF	1060	JSR TCSUB	FOUND, CALL CORRESPONDING
FF85:	A4 34	1061	LDY YSAV	SUBROUTINE
FF87:	4C 73 FF	1062	JMP NXTITM	
FF8A:	A2 03	1063	LDX #S03	
FF8C:	0A	1064	ASL A	
FF8D:	0A	1065	ASL A	GET HEX DIG,
FF8E:	0A	1066	ASL A	SHIFT INTO A2
FF8F:	0A	1067	ASL A	
FF90:	0A	1068	ASL A	
FF91:	26 3E	1069	ROL A2L	
FF93:	26 3F	1070	ROL A2H	
FF95:	CA	1071	DEX	LEAVE X=SFF IF DIG
FF96:	10 F6	1072	3PL NXTBIT	
FF98:	A5 31	1073	LDA MODE	
FF9A:	D0 06	1074	BNE NXTBS2	IF MODE IS ZERO
FF9C:	B5 3F	1075	LDA A2H,X	THEN COPY A2 TO
FF9E:	95 3D	1076	STA A1H,X	A1 AND A1
FFA0:	95 41	1077	STA A3H,X	
FFA2:	E8	1078	INX	
FFA3:	F0 F3	1079	BEQ NXTBAS	
FFA5:	D0 06	1080	BNE NXTCHR	
FFA7:	A2 00	1081	LDX #S00	CLEAR A2
FFA9:	86 3E	1082	STX A2L	
FFAB:	86 3F	1083	STX A2H	
FFAD:	80 00 02	1084	LDA 1N,Y	GET CHAR
FFB0:	C8	1085	1NY	
FFB1:	49 B0	1086	EOR #S00	
FFB3:	C9 0A	1087	CMP #S0A	
FFB5:	90 03	1088	BCC DIG	IF HEX DIG, THEN
FFB7:	69 38	1089	ADC #S88	
FFB9:	C9 FA	1090	CMF #SFA	
FFBB:	B0 CC	1091	BCS DIG	
FFBD:	60	1092	RTS	
FFBE:	A9 FE	1093	LEA #GO/256	PUSH HIGH-ORDER
FFC0:	46	1094	PHA	SUBR ADR ON SIX
FFC1:	39 E3 FF	1095	LEA SUBTBL,Y	PUSH LOW ORDER
FFC4:	48	1096	PHA	SUBR ADR ON STX
FFC5:	A5 31	1097	LDA MODE	
FFC7:	A0 00	1098	LDY #S00	CLR MODE, OLD MODE
FFC9:	64 31	1099	STY MODE	TO A-REG
FFCB:	60	1100	RTS	GO TO SUBR VIA RTS
FFCC:	8C	1101	DFB SBC	F("CTRL-C")
FFCD:	B2	1102	DFB SB2	F("CTRL-Y")
FFCE:	BE	1103	DFB SBE	F("CTRL-E")
FFCF:	ED	1104	DFB SED	F("T")
FFD0:	EF	1105	DFB SEF	F("V")
FFD1:	C4	1106	DFB SC4	F("CTRL-K")
FFD2:	EC	1107	DFB SEC	F("S")
FFD3:	A9	1108	DFB SA9	F("CTRL-P")
FFD4:	BB	1109	DFB SB8	F("CTRL-B")
FFD5:	A6	1110	DFB SA6	F("-")
FFD6:	A4	1111	DFB SA4	F("+")
FFD7:	06	1112	DFB S06	F("N") (F=EX-OR S00+S89)
FFD8:	95	1113	DFB S95	F("<")
FFD9:	07	1114	DFB S07	F("N")
FFDA:	02	1115	DFB S02	F("I")
FFDB:	F5	1116	DFB S05	F("L")
FFDC:	70	1117	DFB SF0	F("B")
FFDD:	00	1118	DFB S00	F("G")
FFDE:	EB	1119	DFB SEB	F("R")
FFDF:	93	1120	DFB S93	F(".")
FFE0:	A7	1121	DFB SA7	F(" ")
FFE1:	C6	1122	DFB SC6	F("CR")
FFE2:	99	1123	DFB S99	F(BLANK)
FFE3:	B2	1124	DFB #BASCONT-1	
FFE4:	C9	1125	DFB #USR-1	
FFE5:	BE	1126	DFB #REG2-1	

FFE0:	C1	1127	DFB	#TRACE-1	
FFE1:	35	1128	DFB	#VFY-1	
FFE2:	6C	1129	DFB	#INPRT-1	
FFE3:	C3	1130	DFB	#STEP2-1	
FFE4:	96	1131	DFB	#OUTPRT-1	
FFE5:	AF	1132	DFB	#XBASIC-1	
FFE6:	17	1133	DFB	#SETMODE-1	
FFE7:	17	1134	DFB	#SETMODE-1	
FFE8:	2B	1135	DFB	#MOVE-1	
FFE9:	1P	1136	DFB	#LT-1	
FFF0:	63	1137	DFB	#SETNORM-1	
FFF1:	7F	1138	DFB	#SETINV-1	
FFF2:	5D	1139	DFB	#LIST-1	
FFF3:	CC	1140	DFB	#WRITE-1	
FFF4:	85	1141	DFB	#GO-1	
FFF5:	FC	1142	DFB	#READ-1	
FFF6:	17	1143	DFB	#SETMODE-1	
FFF7:	17	1144	DFB	#SETMODE-1	
FFF8:	F5	1145	DFB	#CRMON-1	
FFF9:	63	1146	DFB	#BLANK-1	
FFFA:	FB	1147	DFB	#NMI	NMI VECTOR
FFFB:	63	1148	DFB	#NMI/256	
FFFC:	59	1149	DFB	#RESET	RESET VECTOR
FFFD:	FF	1150	DFB	#RESET/256	
FFFE:	86	1151	DFB	#IRO	IRO VECTOR
FFFF:	FA	1152	DFB	#IRO/256	
		1153	KQTNZ	EQU	SJC

SYMBOL TABLE (NUMERICAL ORDER)

0000	LOCO	FC76	SCRL1	FB58	TABV
0022	WNDTOP	FC9E	CLEDLZ	FB78	VIDWAIT
0026	GBASL	FCAA	WAIT3	FB9B	ESCNDW
002A	BAS2L	FCC9	HEADR	FBD9	BELL1
002D	V2	FCE5	WRTAPE	FBF4	ADVANCE
002E	FORMAT	FCFD	RDBIT	FC1A	UP
0030	COLOR	FD2F	ESC	FC2C	ESC1
0034	YSAV	FD62	CANCEL	FC62	CR
003B	KSWL	0001	LOC1	FC8C	SCRL2
003C	A1L	0023	WNCBTM	FCA0	CLEDL2
0040	A3L	0027	QBASH	FCB4	NXTA4
0044	A5L	002B	BAS2H	FCD6	WRBIT
0047	YREG	002D	RMNEM	FCEC	RDBYTE
004F	RNDH	002F	LASTIN	FDOC	RDKEY
03F2	SOFTEV	0031	MODE	FD35	RDCHAR
03FB	NMI	0035	YSAV1	FD67	GETLNZ
C000	IQADR	0039	KSWH	0020	WNDLFT
C030	SPKR	003D	A1H	0024	CH
C053	MIXSET	0041	A3H	002B	BASL
C057	HIRES	0045	A5H	002C	H2
C05B	CLRAN1	0048	STATUS	002E	MASK
C05F	CLRAN3	0095	PICK	002F	LENGTH
CFFF	CLRROM	03F4	PWREDUP	0032	INVFLG
FB0C	RTMASK	03FE	IRGL0C	0036	CSWL
FB26	VLINEZ	C000	KBD	003A	PCL
FB36	CLRTOP	C050	TXTCLR	003E	A2L
FB56	GBCALC	C054	LOWSCR	0042	A4L
FB7F	RTMSKZ	C058	SETANO	0045	ACC
FBA5	ERR	C05C	SETAN2	0049	SPNT
FBC9	MNNDX3	C060	TAPEIN	0200	IN
FBF5	NXTCOL	E000	BASIC	03F5	AMPERV
F926	PRADR3	FB0E	PLOT1	0400	LINE1
F940	PRNTYX	FB2B	VLINE	C010	KBDSTRB
F94A	PRBL2	FB38	CLRSC2	C051	TXTSET
F956	PCADJ3	FB64	SETCOL	C055	HISCR
F9A6	FMT2	F8B2	INSDS1	C059	CLRAN0
FA00	MNEMR	F8A9	GETFMT	C05D	CLRAN2
FA62	RESET	F8D0	INSTDSP	C064	PADDL0
FAA3	NOFIX	F8F9	PRMN2	E003	BASIC2
FABA	SLOOP	F92A	PRADR4	FB19	HLINE
FAE4	XDSP1	F941	PRNTAX	FB31	RTS1
FB11	XLTBL	F94C	PRBL3	FB3C	CLRSC3
FB2E	RTS2D	F95C	PCADJ4	FB71	SCRN
FB4B	SETWND	F9B4	CHAR1	F88C	INSDS2
FB6F	SETPWRC	FA40	IRG	F8BE	MNNDX1
FB97	ESCOLD	FA6F	INITAN	FBD4	PRNTOP
FBD0	BASCLC2	FAA6	PWRUP	F910	PRADR1
FBF0	STORADV	FAC7	NXTBYT	F930	PRADR5
FC10	BS	FAFD	PWRCON	F944	PRNTX
FC2B	RTS4	FB19	RTBL	F953	PCADJ
FC5B	HOME	FB2F	INIT	F961	RTS2

F9BA	CHAR2	F914	PRADR2	DFD0	COU1
FA4C	BREAK	F93B	RELADR	FE08	STOR
FA81	NEWMON	F94B	PRBLNK	FE20	LT
FAA9	SETPG3	F954	PCADJ2	FE58	VFYOK
FAD7	REGDSP	F962	FMT1	FE78	A1PCLP
FB02	DISKID	F9C0	MNEML	FE86	SETIFLG
FB1E	PREAD	FA59	OLDBRK	FE93	SETVID
FB39	SETTXT	FA9B	FIXSEV	FEA7	IOPRT1
FB60	APPLEII	FAAB	SETPLP	FEB6	GO
FB88	KBDWAIT	FADA	RGDSP1	FECA	USR
FBA5	ESCNEW	FB09	TITLE	FEF6	WRBYT2
FBE4	BELL2	FB25	PREAD2	FF16	RD3
FBFC	RTS3	FB40	SETGR	FF44	RESTR1
FC22	VTAB	FB65	STITLE	FF65	MON
FC42	CLREOP	FB94	NOWAIT	FF8A	DIG
FC66	LF	FBC1	BASCALC	FFA7	GETNUM
FC95	SCRL3	FBEF	RTS2B	FFCC	CHRTBL
FCAB	WAIT	FBFD	VIDOUT	FDB4	ADDINP
FCBA	NXTA1	FC24	VTABZ	FDA3	XAMB
FCDB	ZERDLY	FC46	CLEOP1	FDC5	RTS4C
FCEE	RDBYT2	FC70	SCROLL	FDE3	PRHEX
FD13	KEYIN	FC9C	CLREOL	DFE6	COUZ
FD3D	NOTCR	FCA9	WAIT2	FE17	RTS5
FD6A	GETLN	FCCB	RTS4B	FE22	LT2
0021	WWDWTH	FCE2	QNEPLY	FE5E	LIST
0025	CV	FCFA	RD2BIT	FE7F	A1PCRTS
0029	BASH	FD21	KEYIN2	FE89	SETK8D
002C	LMNEM	FD5F	NOTCR1	FE95	OUTPORT
002E	CHKSUM	FD71	BCKSPC	FEA9	IOPRT2
002F	SIGN	FD75	NXTCHAR	FEBF	REQZ
0033	PROMPT	FD92	PRA1	FECD	WRITE
0037	CSWH	FDB3	XAM	FEF6	CRMON
003B	PCH	FDD1	ADD	FF2D	PRERR
003F	A2H	FDED	COU	FF4A	SAVE
0043	A4H	FE04	BLANK	FF69	MONZ
0046	XREG	FE1D	SETMDZ	FF90	NXTBIT
004E	RNDL	FE36	VFY	FFAD	NXTCHR
03F0	BRKV	FE75	A1PC	FFE3	SUBTBL
03FB	USRADR	FE84	SETNORM	FD8E	CROUT
07FB	MSLOT	FE8D	INPRT	FDAD	MODBCHK
C020	TAPEOUT	FE9B	IOPRT	FDC6	XAMPM
C052	MIXCLR	FEB3	BASCQNT	FDE5	PRHEXZ
C056	LORES	FEC4	STEPZ	FE00	BL1
C05A	SETAN1	FEED	WRBYTE	FE18	SETMODE
C05E	SETAN3	FF0A	RD2	FE2C	MOVE
C070	PTRIG	FF3F	RESTORE	FE63	LIST2
FB00	PLOT	FF59	OLDRST	FE80	SETINV
FB1C	HLIN1	FF7A	CHRSRCH	FE8B	INPORT
FB32	CLRSCR	FFA2	NXTBS2	FE97	OUTPRT
FB47	GBASCALC	FFC7	ZMODE	FEB0	XBASIC
FB79	SCRN2	FD7E	CAPTST	FEC2	TRACE
FB9B	IEVEN	FD96	PRYX2	FED4	WR1
F8C2	MNNDX2	FDB6	DATAOUT	FEFD	READ
F8DB	PRNTBL	FDDA	PRBYTE	FF3A	BELL

FF4C SAV1
FF73 NXTITM
FF9B NXTBAS
FFBE TOSUB

SYMBOL TABLE (ALPHABETICAL ORDER)

003D A1H	F956 PCADJ3	FEA7 IOPRT1
FE7F A1PCRTS	0095 PICK	FA40 IRG
0040 A3L	F910 PRADR1	FD1B KEYIN
0044 A5L	F930 PRADR5	002F LASTIN
FBF4 ADVANCE	FDDA PRBYTE	FE5E LIST
002A BAS2L	FDE3 PRHEX	0001 LOC1
0029 BASH	F8DB PRNTBL	FE20 LT
FD71 BCKSPC	0033 PROMPT	F9C0 MNEML
FE00 BL1	03F4 PWREDUP	F8C9 MNNDX3
FC10 BS	FF16 RD3	FF65 MON
F9BA CHAR2	FD35 RDCHAR	03FB NMI
0024 CH	FAD7 REGDSP	FB94 NOWAIT
C059 CLRANO	FF3F RESTORE	FF90 NXT31T
FC9C CLREQOL	004F RNDH	FFAD NXTCHR
FB3C CLRSC3	F87F RTMSKZ	FF59 OLDRST
FD4D COUT	F961 RTS2	C064 PADDLO
FC62 CR	003C A1L	F95C PCADJ4
0025 CV	003F A2H	F80E PLOT1
FBA5 ERR	0043 A4H	F914 PRADR2
FB97 ESCOLD	0045 ACC	F94A PRDL2
F9A6 FMT2	03F5 AMPERV	FB1E PREAD
0026 GBASL	FBC1 BASCALC	FDE5 PRHEXZ
FD6A GETLN	E000 BASIC	FBD4 PRNTCP
FCC9 HEADR	FBD9 BELL1	FD96 PRYX2
FB19 HLINE	FE04 BLANK	FAA6 PWRUP
0200 IN	FD62 CANCEL	FCFD RDBIT
FBB2 INSDS1	002E CHKSUM	FDOC RDKEY
C000 IOADR	FCA0 CLEOL2	FEBF REGZ
03FE IRGLOC	C05B CLRAN1	FF44 RESTR1
C000 KBD	FC42 CLREOP	004E RNDL
003B KSWL	F832 CLRSCR	F831 RTS1
0400 LINE1	FDFO COUT1	F8FC RTS3
0000 LOCO	FEF6 CRMON	FE78 A1PCLP
FE22 LT2	FDB6 DATAOUT	003E A2L
C053 MIXSET	FC2C ESC1	0042 A4L
F8C2 MNNDX2	FD2F ESC	FD84 ADDINP
FF69 MONZ	002E FORMAT	FB60 APPLEII
FAB1 NEWMON	F856 GBCALC	FBD0 BASCLC2
FD5F NOTCR1	FFA7 GETNUM	E003 BASIC2
FF9B NXTBAS	C057 HIRES	FBE4 BELL2
FD75 NXTCHAR	FC5B HOME	FA4C BREAK
FA59 OLDBRK	FB2F INIT	FD7E CAPTST
FE97 OUTPRT	F88C INSDS2	FF7A CHRSRCH

FC9E	CLEDLZ	FF3A	BELL	C05C	SETAN2
C05D	CLRAN2	03F0	BRKV	FEB6	SETIFLG
CFFF	CLRR0M	F9B4	CHAR1	FE18	SETMODE
FB36	CLRTOP	FFCC	CHRTBL	FB6F	SETPWRC
FDF6	CLOUTZ	FC46	CLEOP1	002F	SIGN
0037	CSWH	C05F	CLRAN3	0049	SPNT
FFBA	DIG	F838	CLRSC2	FE0B	STOR
FBA5	ESCNEW	0030	COLOR	C060	TAPEIN
FA9B	FIXSEV	FDBE	CROUT	FE22	TRACE
FB47	GBASCALC	0036	CSWL	FECA	USR
FBA9	GETFMT	FB02	DISKID	FE5B	VFYOK
FEB6	GO	FB9B	ESCNOW	FB2B	VLINE
C055	HISCR	F962	FMT1	FCAB	WAIT
F89B	IEVEN	0027	GBASH	0022	WNDTOP
FE8B	INPORT	FD67	GETLNZ	FEFF	WRBYT2
FBD0	INSTDSP	002C	H2	FDA3	XAMB
FEA9	IOPRT2	FB1C	HLINE1	FB11	XLTBL
C010	KBDSTRB	FA6F	INITAN	0034	YSAV
FD21	KEYIN2	FE8D	INPRT	FC8C	SCRL2
002F	LENGTH	0032	INVFLG	FC70	SCROLL
FE63	LIST2	FE9B	IOPRT	C05E	SETAN3
C056	LORES	FB88	KBDWAIT	FE80	SETINV
002E	MASK	0039	KSWH	FE84	SETNORM
FA00	MNEMR	FC66	LF	FB39	SETTXT
FDAD	MODBCHK	002C	LMNEM	FABA	SETT
FE2C	MOVE	C054	LOWSCR	004B	STATUS
FAA3	NOFIX	C052	MIXCLR	FBF0	STORADV
FCBA	NXTA1	FB8E	MNNDX1	C020	TAPEOUT
FFA2	NXTBS2	0031	MODE	C050	TXTCLR
F8F5	NXTCOL	07FB	MSLOT	03FB	USRADR
FCE2	ONEDLY	FD3D	NOTCR	FBFD	VIDOUT
F954	PCADJ2	FCB4	NXTA4	FC24	VTABZ
003B	PCH	FAC7	NXTBYT	FCAA	WAIT3
F800	PLOT	FF73	NXTITM	0021	WNDWDTH
F926	PRADR3	FE95	OUTPORT	FEED	WRBYTE
F94C	PRBL3	F953	PCADJ	FDC6	XAMP1
FB25	PREAD2	003A	PCL	0046	XREQ
F8F9	PRMN2	FD92	PRA1	FCDB	ZERDLY
F944	PRNTX	F92A	PRADR4	FF4C	SAV1
C070	PTRIG	F948	PRBLNK	FC95	SCRL3
FCFA	RD2BIT	FF2D	PRERR	C058	SETANO
FCEE	RDBYT2	F941	PRNTAX	FB64	SETCOL
FAE4	RDSP1	F940	PRNTYX	FE89	SETKBD
F938	RELADR	FAFD	PWRCON	FAA9	SETPG3
FADA	RGDSP1	FF0A	RD2	FE93	SETVID
FB19	RTBL	FCEC	RDBYTE	03F2	SOFTEV
FBEF	RTS2B	FEFD	READ	FEC4	STEPZ
FCC8	RTS4B	FA62	RESET	FFE3	SUBTBL
FE75	A1PC	002D	RMNEM	FB09	TITLE
0041	A3H	FB0C	RTMASK	C051	TXTSET
0045	A5H	FB2E	RTS2D	002D	V2
FDD1	ADD	FDC5	RTS4C	FB7B	VIDWAIT
002B	BAS2H	FE17	RTS5	FC22	VTAB
FEB3	BASCONT	FC2B	RTS4	0023	WNOBTM
002B	BASL	FC76	SCRL1	FED4	WR1
		FB79	SCRN2		

FECD WRITE
FDB3 XAM
0047 YREG
FFC7 ZMODE
FF4A SAVE
FB71 SCRN
C05A SETAN1
FB40 SETGR
FE1D SETMDZ
FAAB SETPLP
FB4B SETWND
C030 SPKR
FB65 STITLE
FB5B TABV
FFBE TOSUB
FC1A UP
FE36 VFY
FB26 VLINEZ
FCA9 WAIT2
0020 WNDLFT
FCD6 WRBIT
FCE5 WRTAPE
FEBO XBASIC
0035 YSAV1

SYMBOL TABLE SIZE
2589 BYTES USED
2531 BYTES REMAINING

SLIST 4A

GLOSSARY

6502: The manufacturer's name for the microprocessor at the heart of your Apple.

Address: As a noun: the particular number associated with each memory location. On the Apple, an address is a number between 0 and 65535 (or \$0000 and \$FFFF hexadecimal). As a verb: to refer to a particular memory location.

Address Bus: The set of wires, or the signal on those wires, which carry the binary-encoded address from the microprocessor to the rest of the computer.

Addressing mode: The Apple's 6502 microprocessor has thirteen distinct ways of referring to most locations in memory. These thirteen methods of forming addresses are called **addressing modes**.

Analog: Analog measurements, as opposed to digital measurements, use an continuously variable physical quantity (such as length, voltage, or resistance) to represent values. Digital measurements use precise, limited quantities (such as presence or absence of voltages or magnetic fields) to represent values.

AND: A binary function which is "on" if and only if all of its inputs are "on".

Apple: 1. The round fleshy fruit of a Rosaceous tree (*Pyrus Malus*). 2. A brand of personal computer. 3) Apple Computer, Inc., manufacturer of home and personal computers.

ASCII: An acronym for the American Standard Code for Information Interchange (often called "USASCII" or misinterpreted as "ASC-II"). This standard *code* assigns a unique value from 0 to 127 to each of 128 numbers, letters, special characters, and control characters.

Assembler: 1) One who assembles electronic or mechanical equipment. 2) A program which converts the *mnemonics* and *symbols* of assembly language into the *opcodes* and *operands* of machine language.

Assembly language: A language similar in structure to machine language, but made up of *mnemonics* and *symbols*. Programs written in assembly language are slightly less difficult to write and understand than programs in machine language.

BASIC: Acronym for "Beginner's All-Purpose Symbolic Instruction Code". BASIC is a *higher-level language*, similar in structure to FORTRAN but somewhat easier to learn. It was invented by Kemeny and Kurtz at Dartmouth College in 1963 and has proved to be the most popular language for personal computers.

Binary: A number system with two digits, "0" and "1", with each digit in a binary number representing a power of two. Most digital computers are binary, deep down inside. A binary signal is easily expressed by the presence or absence of something, such as an electrical potential or a magnetic field.

Binary Function: An operation performed by an electronic circuit which has one or more inputs and only one output. All inputs and outputs are binary signals. See *AND OR*, and *Exclusive-OR*.

Bit: A *Binary digit*. The smallest amount of information which a computer can hold. A single bit specifies a single value: "0" or "1". Bits can be grouped to form larger values (see *Byte* and *Nybble*).

Board: See *Printed Circuit Board*.

Bootstrap ("boot"): To get a system running from a *cold-start*. The name comes from the machine's attempts to "pull itself off the ground by tugging on its own bootstraps."

Buffer: A device or area of memory which is used to hold something temporarily. The "picture buffer" contains graphic information to be displayed on the video screen; the "input buffer" holds a partially formed input line.

Bug: An error. A *hardware bug* is a physical or electrical malfunction or design error. A *software bug* is an error in programming, either in the logic of the program or typographical in nature. See "feature".

Bus: A set of wires or *traces* in a computer which carry a related set of data from one place to another, or the data which is on such a bus.

Byte: A basic unit of measure of a computer's memory. A byte usually comprises eight *bits*. Thus, it can have a value from 0 to 255. Each character in the *ASCII* can be represented in one byte. The Apple's memory locations are all one byte, and the Apple's addresses of these locations consist of two bytes.

Call: As a verb: to leave the program or subroutine which is currently executing and to begin another, usually with the intent to return to the original program or subroutine. As a noun: an instruction which calls a subroutine.

Character: Any *graphic* symbol which has a specific meaning to people. Letters (both upper- and lower-case), numbers, and various symbols (such as punctuation marks) are all characters.

Chip: See *Integrated Circuit*.

Code: A method of representing something in terms of something else. The *ASCII* code represents characters as binary numbers, the *BASIC* language represents algorithms in terms of program statements. **Code** is also used to refer to programs, usually in *low-level languages*.

Cold-start: To begin to operate a computer which has just been turned on.

Color burst: A signal which color television sets recognize and convert to the colored dots you see on a color TV screen. Without the color burst signal, all pictures would be black-and-white.

Computer: Any device which can receive and store a set of *instructions*, and then act upon those instructions in a predetermined and predictable fashion. The definition implies that both the instruction and the *data* upon which the instructions act can be changed. A device whose instructions cannot be changed is not a computer.

Control (CTRL) character: Characters in the *ASCII* character set which usually have no graphic representation, but are used to control various functions. For example, the RETURN control character is a signal to the Apple that you have finished typing an *input line* and you wish the computer to act upon it.

CRT: Acronym for "Cathode-Ray Tube", meaning any television screen, or a device containing such a screen.

Cursor: A special symbol which reminds you of a certain position on something. The cursor on a slide rule lets you line up numbers; the cursor on the Apple's screen reminds you of where you are when you are typing.

Data (datum): Information of any type.

Debug: To find *bugs* and eliminate them.

DIP: Acronym for "Dual In-line Package", the most common container for an Integrated Circuit. DIPs have two parallel rows of *pins*, spaced on one-tenth of an inch centers. DIPs usually come in 14-, 16-, 18-, 20-, 24-, and 40-pin configurations.

Disassembler: A program which converts the *opcodes* of *machine language* to the *mnemonics* of *assembly language*. The opposite of an *assembler*.

Display: As a noun: any sort of output device for a computer, usually a *video* screen. As a noun: to place information on such a screen.

Edge connector: A socket which mates with the edge of a *printed circuit board* in order to exchange electrical signals.

Entry point: The location used by a machine-language subroutine which contains the first executable instruction in that subroutine; consequently, often the beginning of the subroutine.

Exclusive-OR: A binary function whose value is "off" only if all of its inputs are "off", or all of its inputs are "on".

Execute: To perform the intention of a command or instruction. Also, to run a program or a portion of a program.

Feature: A *bug* as described by the marketing department.

Format: As a noun: the physical form in which something appears. As a verb: to specify such a form.

Graphic: Visible as a distinct, recognizable shape or color.

Graphics: A system to display graphic items or a collection of such items.

Hardware: The physical parts of a computer.

Hexadecimal: A number system which uses the ten digits 0 through 9 and the six letters A through F to represent values in base 16. Each hexadecimal digit in a hexadecimal number represents a power of 16. In this manual, all hexadecimal numbers are preceded by a dollar sign (\$).

High-level Language: A *language* which is more intelligible to humans than it is to machines.

High-order: The most important, or item with the highest value, of a set of similar items. The high-order bit of a byte is that which has the highest place value.

High part: The *high-order* byte of a two-byte address. In decimal, the high part of an address is the quotient of the address divided by 256. In the 6502, as in many other microprocessors, the high part of an address comes last when that address is stored in memory.

Hz (Hertz): Cycles per second. A bicycle wheel which makes two revolutions in one second is running at 2Hz. The Apple's microprocessor runs at 1,023,000Hz.

I/O: See *Input/Output*.

IC: See *Integrated Circuit*.

Input: As a noun: data which flows from the outside world into the computer. As a verb: to obtain data from the outside world.

Input/Output (I/O): The software or hardware which exchanges data with the outside world.

Instruction: The smallest portion of a program that a computer can execute. In 6502 machine language, an instruction comprises one, two, or three bytes; in a higher-level language, instructions may be many characters long.

Integrated circuit: A small (less than the size of a fingernail and about as thin) wafer of a glassy material (usually silicon) into which has been etched an electronic circuit. A single IC can contain from ten to ten thousand discrete electronic components. ICs are usually housed in *DIPs* (see above), and the term IC is sometimes used to refer to both the circuit and its package.

Interface: An exchange of information between one thing and another, or the mechanisms which make such an exchange possible.

Interpreter: A program, usually written in machine language, which understands and executes a higher-level language.

Interrupt: A physical effect which causes the computer to jump to a special interrupt-handling subroutine. When the interrupt has been taken care of, the computer resumes execution of the interrupted program with no noticeable change. Interrupts are used to signal the computer that a particular device wants attention.

K: Stands for the greek prefix "Kilo", meaning one thousand. In common computer-related usage, "K" usually represents the quantity 2^{10} , or 1024 (hexadecimal \$400).

Kilobyte: 1,024 bytes.

Language: A computer language is a code which (hopefully!) both a programmer and his computer understand. The programmer expresses what he wants to do in this code, and the computer understands the code and performs the desired actions.

Line: On a video screen, a "line" is a horizontal sequence of graphic symbols extending from one edge of the screen to the other. To the Apple, an *input line* is a sequence of up to 254 characters, terminated by the control character RETURN. In most places which do not have personal computers, a line is something you wait in to use the computer.

Low-level Language: A *language* which is more intelligible to machines than it is to humans.

Low-order: The least important, or item with the least value, of a set of items. The low-order bit in a byte is the bit with the least place value.

Low part: The *low-order* byte of a two-byte address. In decimal, the low part of an address is the remainder of the address divided by 256, also called the "address modulo 256." In the 6502, as in many other microprocessors, the low part of an address comes first when that address is stored in memory.

Machine language: The lowest level language which a computer understands. Machine

languages are usually binary in nature. Instructions in machine language are single-byte *opcodes* sometimes followed by various *operands*.

Memory address: A memory address is a two-byte value which selects a single memory location out of the *memory map*. Memory addresses in the Apple are stored with their low-order bytes first, followed by their high-order bytes.

Memory location: The smallest subdivision of the memory map to which the computer can refer. Each memory location has associated with it a unique *address* and a certain *value*. Memory locations on the Apple comprise one byte each.

Memory Map: This term is used to refer to the set of all memory locations which the microprocessor can address directly. It is also used to describe a graphic representation of a system's memory.

Microcomputer: A term used to describe a computer which is based upon a microprocessor.

Microprocessor: An integrated circuit which understands and executes machine language programs.

Mnemonic: An acronym (or any other symbol) used in the place of something more difficult to remember. In *Assembly Language*, each machine language opcode is given a three letter mnemonic (for example, the opcode \$60 is given the mnemonic RTS, meaning "ReTurn from Subroutine").

Mode: A condition or set of conditions under which a certain set of rules apply.

Modulo: An arithmetic function with two operands. *Modulo* takes the first operand, divides it by the second, and returns the remainder of the division.

Monitor: 1) A closed-circuit television receiver. 2) A program which allows you to use your computer at a very low level, often with the values and addresses of individual memory locations.

Multiplexer: An electronic circuit which has many data inputs, a few selector inputs, and one output. A multiplexer connects one of its many data inputs to its output. The data input it chooses to connect to the output is determined by the selector inputs.

Mux: See *Multiplexer*.

Nybble: Colloquial term for half of a byte, or four bits.

Opcod: A machine language instruction, numerical (often binary) in nature.

OR: A binary function whose value is "on" if at least one of its inputs are "on".

Output: As a noun, data generated by the computer whose destination is the real world. As a verb, the process of generating or transmitting such data.

Page: 1) A screenfull of information on a video display. 2) A quantity of memory locations, addressible with one byte. On the Apple, a "page" of memory contains 256 locations.

Pascal: A noted French scientist.

PC board: See *Printed Circuit Board*.

Peripheral: Something attached to the computer which is not part of the computer itself. Most peripherals are input and/or output devices.

Personal Computer: A computer with *memory*, *languages*, and *peripherals* which are well-suited for use in a home, office, or school.

Pinout: A description of the function of each pin on an IC, often presented in the form of a diagram.

Potentiometer: An electronic component whose resistance to the flow of electrons is proportional to the setting of a dial or knob. Also known as a "pot" or "variable resistor".

Printed Circuit Board: A sheet of fiberglass or epoxy onto which a thin layer of metal has been applied, then etched away to form *traces*. Electronic components can then be attached to the board with molten solder, and they can exchange electronic signals via the etched traces on the board. Small printed circuit boards are often called "cards", especially if they are meant to connect with *edge connectors*.

Program: A sequence of instructions which describes a process.

PROM: Acronym for "Programmable Read-Only Memory". A PROM is a ROM whose contents can be altered by electrical means. Information in PROMs does not disappear when the power is turned off. Some PROMs can be erased by ultraviolet light and be reprogrammed.

RAM: See *Random-Access Memory*.

Random-Access Memory (RAM): This is the main memory of a computer. The acronym RAM can be used to refer either to the integrated circuits which make up this type of memory or the memory itself. The computer can store values in distinct locations in RAM and recall them again, or alter and re-store them if it wishes. On the Apple, as with most small computers, the values which are in RAM memory are lost when the power to the computer is turned off.

Read-Only Memory (ROM): This type of memory is usually used to hold important programs or data which must be available to the computer when the power is first turned on. Information in ROMs is placed there in the process of manufacturing the ROMs and is unalterable. Information stored in ROMs does not disappear when the power is turned off.

Reference: 1) A source of information, such as this manual. 2) As a verb, the action of examining or altering the contents of a memory location. As a noun, such an action.

Return: To exit a subroutine and go back to the program which called it.

ROM: See *Read-Only Memory*.

Run: To follow the sequence of instructions which comprise a program, and to complete the process outlined by the instructions.

Scan line: A single sweep of a cathode beam across the face of a *cathode-ray tube*.

Schematic: A diagram which represents the electrical interconnections and circuitry of an electronic device.

Scroll: To move all the text on a display (usually upwards) to make room for more (usually at the bottom).

Soft switch: A two-position switch which can be "thrown" either way by the software of a computer.

Software: The *programs* which give the hardware something to do.

Stack: A reserved area in memory which can be used to store information temporarily. The information in a stack is referenced not by address, but in the order in which it was placed on the stack. The last datum which was "pushed" onto the stack will be the first one to be "popped" off it.

Strobe: A momentary signal which indicates the occurrence of a specific event.

Subroutine: A segment of a program which can be executed by a single *call*. Subroutines are used to perform the same sequence of instructions at many different places in one program.

Syntax: The structure of instructions in a given *language*. If you make a mistake in entering an instruction and garble the syntax, the computer sometimes calls this a "SYNTAX ERROR."

Text: Characters, usually letters and numbers. "Text" usually refers to large chunks of English, rather than computer, language.

Toggle switch: A two-position switch which can only flip from one position to the other and back again, and cannot be directly set either way.

Trace: An etched conductive path on a *Printed-Circuit Board* which serves to electronically connect components.

Video: 1) Anything visual. 2) Information presented on the face of a *cathode-ray tube*.

Warm-start: To restart the operation of a computer after you have lost control of its language or operating system.

Window: Something out of which you jump when the power fails and you lose a large program. Really: a reserved area on a *display* which is dedicated to some special purpose.

BIBLIOGRAPHY

- Alford, R. (1997) *Principles of International Law* (Oxford: Oxford University Press).
- Alford, R. (2001) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2002) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2003) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2004) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2005) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2006) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2007) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2008) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2009) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2010) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2011) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2012) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2013) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2014) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2015) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2016) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2017) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2018) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2019) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2020) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2021) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2022) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2023) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2024) *International Law: A Practical Approach* (Oxford: Oxford University Press).
- Alford, R. (2025) *International Law: A Practical Approach* (Oxford: Oxford University Press).

Here are some other publications which you might enjoy:

Synertek/MOS Technology 6500 Programming Manual

This manual is an introduction to machine language programming for the MC6502 microprocessor. It describes the machine language operation of the Apple's microprocessor in meticulous detail. However, it contains no specific information about the Apple.

This book is available from Apple. Order part number A2L0003.

Synertek/MOS Technology 6500 Hardware Manual

This manual contains a detailed description of the internal operations of the Apple's 6502 microprocessor. It also has much information regarding interfacing the microprocessor to external devices, some of which is pertinent to the Apple.

This book is also available from Apple. Order part number A2L0002.

The Apple II Monitor Peeled

This book contains a thorough, well-done description of the operating subroutines within the Apple's original Monitor ROM.

This is available from the author:

William E. Dougherty
14349 San Jose Street
Los Angeles, CA 91345

Programming the 6502

This book, written by Rodney Zaks, is an excellent tutorial manual on machine and assembly-language programming for the Apple's 6502 microprocessor.

This manual is available from Sybex Incorporated, 2020 Milvia, Berkeley, CA 94704. It should also be available at your local computer retailer or bookstore. Order book number C202.

6502 Applications

This book, also written by Rodney Zaks, describes many applications of the Apple's 6502 microprocessor.

This is also available from Sybex. Order book number D302.

System Description: The Apple II

Written by Steve Wozniak, the designer of the Apple computers, this article describes the basic construction and operation of the Apple II.

This article was originally published in the May, 1977 issue of BYTE magazine, and is available from BYTE Publications, Inc. Peterborough, NH 30458.

SWEET16: The 6502 Dream Machine

Also written by Steve Wozniak, this article describes the SWEET16® interpretive machine language enclosed in the Apple's Integer BASIC ROMs.

This article appeared in the October, 1977 issue of BYTE magazine, and is available from BYTE Publications, Inc. Peterborough, NH 30458.

More Colors for your Apple

This article, written by Allen Watson III, describes in detail the Apple High-Resolution Graphics mode. Also included is a reply by Steve Wozniak, the designer of the Apple, describing a modification you can make to update your Revision 0 Apple to add the two extra colors available on the Revision 1 board.

This article appeared in the June, 1979 issue of BYTE magazine, and is available from BYTE Publications, Inc. Peterborough, NH 30458.

Call APPLE (Apple Puget Sound Program Library Exchange)

This is one of the largest Apple user group newsletters. For information, write:

Apple Puget Sound Program Library Exchange
6708 39th Ave. Southwest
Seattle, Wash., 98136

The Cider Press

This is another large club newsletter. For information, write:

The Cider Press
c/o The Apple Core of San Francisco
Box 4816
San Francisco, CA 94101



INDEX

- 190 GENERAL INDEX
- 194 INDEX OF FIGURES
- 195 INDEX OF PHOTOS
- 195 INDEX OF TABLES
- 195 CAST OF CHARACTERS

GENERAL INDEX

0 boards, Revision.....	3, 26
1 board, Revision.....	3, 26
2716 type PROMs.....	94
50Hz modification, Eurapple.....	10
6502 instruction set.....	Appendix A
6502 internal registers.....	53, 81
6502 microprocessor.....	3, 88

-- A --

Access Memory (RAM), Random.....	3
address and data buses.....	88, 90
address multiplexer, RAM.....	96
addresses and data.....	40
addressing modes.....	66
analog inputs.....	24
annunciator outputs.....	23, 36, 100
annunciator special locations.....	24
Apple Firmware card.....	73
Apple Language card.....	3
Apple main board, the.....	3, 89
Apple Mini-assembler.....	49
Apple, photo of the.....	2
Apple power supply, the.....	2, 92
Apple, setting up the.....	2
Apples, varieties of.....	25
ASCII character code.....	5, 6, 7, 8, 15
ASCII codes, keys and.....	7
Autostart ROM listing.....	Appendix C
Autostart ROM Reset.....	36
Autostart ROM special locations.....	37
Autostart ROM.....	25
auxiliary video connector.....	9

-- B --

backspace character.....	30
backspace key.....	34
BASIC, entering.....	34, 54
BASIC, reentering.....	34, 54
bell character.....	31
block pinout, configuration.....	71
blocks, RAM configuration.....	70
board I/O, peripheral.....	79
board, Revision 0.....	3, 26
board, Revision 1.....	3, 26
board, the Apple main.....	3, 89
board schematic, main.....	110
buffer, picture.....	12
buffer, input.....	33
built-in I/O.....	78, 98

buses, address and data.....	88, 90
byte, power-up.....	37, 65

-- C --

card, Apple Language.....	3
card, Apple Firmware.....	73
cassette interface jacks.....	22, 103
cassette interface.....	22
cassette tape, saving to.....	46
cassette tape, reading from.....	47
changing memory.....	43
character code, ASCII.....	5, 6, 7, 8, 15
character, backspace.....	30
character, line-feed.....	30
character, RETURN.....	30
character, bell.....	31
characters, prompting.....	33
characters, keyboard.....	7, 8
characters, control.....	7
clearing the keyboard strobe.....	6
code, ASCII character.....	5, 6, 7, 8, 15
codes, escape.....	34
codes, keys and ASCII.....	7
cold start.....	36
colors, Low-Res.....	11, 17
colors, High-Res.....	11, 19, 26
colors, European High-Res.....	20
command loops, Monitor.....	56
commands, creating your own.....	57
commands, summary of Monitor.....	59
comparing memory.....	46
configuration block pinout.....	71
configuration blocks, RAM.....	70
configuration, RAM memory.....	70
connector pinout, peripheral.....	106
connector, keyboard.....	5, 102
connector, power.....	104
connector, speaker.....	105
connector, Game I/O.....	23, 100
connector, auxiliary video.....	9
connector, video.....	9
connectors, peripheral.....	3, 105
connector pinouts, keyboard.....	103
control characters.....	7
control values, Normal/Inverse.....	32
Controllers, Game.....	24, 100
COUT, KEYIN switches.....	83
COUT standard output subroutine.....	30
creating your own commands.....	57
CSW/KSW switches.....	83

cursor.....	30
cursor, output.....	30
cycle, the RESET.....	36

-- D --

data buses, address and.....	90
data, addresses and.....	40
debugging programs.....	51
display special locations, video.....	13
display, video.....	9

-- E --

editing an input line.....	33
editing features.....	25
entering BASIC.....	34, 54
entering the Monitor.....	40
entry vector, soft.....	37
escape (ESC) codes.....	34
Eurapple 50Hz modification.....	10
European High-Res colors.....	20
examining memory.....	41
expansion ROM.....	84

-- F --

feature, the Stop-List.....	26, 30
features, input/output.....	20
features, editing.....	25
features, keyboard.....	5
features, microprocessor.....	88
features, power supply.....	92
Firmware card, Apple.....	73
("flag") inputs, one-bit.....	24, 78
format, Text screen.....	16
format, Low-Res screen.....	18
format, High-Res screen.....	21
from cassette tape, reading.....	47

-- G --

Game Controllers.....	24
Game I/O connector.....	23, 100
generator, the video.....	96
GETLN and input lines.....	33
graphics modes.....	11
graphics, High-Res.....	19
graphics, Low-Res.....	17

-- H --

hexadecimal notation.....	40
High-Res colors, European.....	20

High-Res graphics.....	19
High-Res screen, the.....	21
High-Res video mode, the.....	19
High-Res colors.....	19, 26

-- I --

input buffer.....	33
input line, editing an.....	33
input lines, GETLN and.....	33
input prompting.....	32
input subroutine, RDKEY standard.....	32
input/output features.....	20
input/output special locations.....	25
input/output.....	78
inputs, data.....	78
inputs, one-bit ("flag").....	24, 78
inputs, analog.....	24
inputs, single-bit pushbutton.....	78
instruction set, 6502.....	Appendix A
instructions, Mini-Assembler.....	66
interface jacks, cassette.....	22, 103
interface, cassette.....	22
internal registers, 6502.....	53, 81
interrupts.....	65, 107, 108
inverse text mode.....	32, 54
I/O connector, Game.....	23, 100
I/O programming suggestions.....	80
I/O special locations.....	79
I/O, built-in.....	78, 98
I/O, peripheral board.....	79
I/O, peripheral slot.....	79

-- J --

jacks, cassette interface.....	22, 103
jacks, video output.....	97
jumper, "USER 1".....	99

-- K --

key, backspace.....	34
key, retype.....	34
keyboard characters.....	7, 8
keyboard connector.....	5, 102
keyboard connector pinouts.....	103
keyboard features.....	5
keyboard schematic.....	101
keyboard special locations.....	6
keyboard strobe.....	6, 78, 79, 98, 102
keyboard strobe, clearing the.....	6
keyboard, review of the.....	4, 100
keyboard, reading the.....	6
KEYIN switches, COUT.....	83

keys and ASCII codes.....	7
-- L --	
Language card, Apple.....	3, 69
leaving the Mini-Assembler.....	50
line, editing an input.....	33
line-feed character.....	30
lines, GETLN and input.....	33
listing, Autostart ROM.....	Appendix C
listing, Monitor ROM.....	Appendix C
listing machine language programs.....	49
list of special locations.....	Appendix B
locations, list of special.....	Appendix B
locations, annunciator special.....	24
locations, video display special.....	13
locations, input/output special.....	25
locations, text window special.....	31
locations, Autostart ROM special.....	37
locations, Monitor special.....	65
locations, keyboard special.....	6
locations, I/O special.....	79
loops, Monitor command.....	56
Low-Res colors.....	17
Low-Res screen, the.....	18
Low-Res video mode, the.....	17
lukewarm start.....	36
-- M --	
machine language programs, listing.....	49
main board, the Apple.....	3, 89
main board schematic.....	110
map, system memory.....	68
maps, zero page memory.....	74
Memory (RAM), Random Access.....	3
Memory (ROM), Read-Only.....	3
memory configuration, RAM.....	70
memory map, system.....	68
memory maps, zero page.....	74
memory pages.....	68
memory, examining.....	41
memory, changing.....	43
memory, moving.....	44
memory, comparing.....	46
memory, RAM.....	68, 95
memory, ROM.....	72, 94
microprocessor features.....	88
microprocessor, 6502.....	3, 88
Mini-Assembler instructions.....	66
Mini-Assembler prompt (!).....	50
Mini-Assembler, Apple.....	49
Mini-Assembler, leaving the.....	50
mode, the text video.....	14
mode, the Low-Res video.....	17
mode, the High-Res video.....	19
mode, inverse text.....	32
mode, normal text.....	32
modes, addressing.....	66
modes, graphics.....	11
modification, Eurapple 50Hz.....	10
Monitor command loops.....	56
Monitor commands, summary of.....	59
Monitor prompt (*).....	40
Monitor ROM RESET.....	38
Monitor ROM listing.....	Appendix C
Monitor ROM.....	25
Monitor special locations.....	65
Monitor subroutines, some useful.....	61
Monitor, entering the.....	40
moving memory.....	44
multiplexer, RAM address.....	96
-- N --	
normal text mode.....	32
Normal/Inverse control values.....	32
notation, hexadecimal.....	40
number, random.....	33
-- O --	
one (system stack), page.....	69
one-bit ('flag') inputs.....	24, 25, 78
output cursor.....	30
output jacks, video.....	97
output subroutine, COUT standard.....	30
output, utility strobe.....	25
outputs, annunciator.....	23
outputs, strobe.....	78
own commands, creating your.....	57
-- P --	
page memory maps, zero.....	74
page one (system stack).....	69
page zero.....	69, 74
pages, screen.....	12
pages, memory.....	68
peripheral board I/O.....	79
peripheral connector pinout.....	106
peripheral connectors.....	3, 105
peripheral slot I/O.....	79
peripheral slot RAM.....	82
peripheral slot ROM.....	80
photo of the Apple.....	2
picture buffer.....	12
pinout, peripheral connector.....	106

pinout, configuration block.....	71
pinout, ROM.....	95
pinout, RAM.....	96
pinouts, keyboard connector.....	103
power connector.....	104
power supply features.....	92
power supply schematic.....	93
power supply, the Apple.....	2, 28, 92
power-up byte.....	37, 65
programming suggestions, I/O.....	80
programs, running machine language.....	48
programs, listing machine language.....	48
programs, debugging.....	51
PROM, peripheral card.....	80
PROM, expansion ROM or.....	84
PROMs, 2716 type.....	94
prompt (*), Monitor.....	40
prompt (!), Mini-Assembler.....	50
prompting characters.....	33
prompting, input.....	32
pushbutton inputs, single-bit.....	78

-- R --

RAM address multiplexer.....	96
RAM configuration blocks.....	70
RAM memory configuration.....	70
RAM memory.....	68, 95
RAM pinout.....	96
RAM, peripheral slot.....	82
random access memory (RAM).....	3
random number.....	33
RDKEY standard input subroutine.....	32
reading from cassette tape.....	47
reading the keyboard.....	6
read-only memory (ROM).....	3
reentering BASIC.....	34, 54
registers, 6502 internal.....	53, 81
relationships, timing signals and.....	91
RESET cycle, the.....	36
RESET, Autostart ROM.....	36
RESET, Monitor ROM.....	38
return character.....	30
retype key.....	34
review of the keyboard.....	4, 100
Revision 0 boards.....	3, 26
Revision 1 board.....	26
ROM listing, Autostart.....	Appendix C
ROM listing, Monitor.....	Appendix C
ROM memory.....	72, 94
ROM pinout.....	95
ROM RESET, Autostart.....	36
ROM RESET, Monitor.....	38
ROM special locations, Autostart.....	37

ROM, Autostart.....	25
ROM, Monitor.....	25
ROM, peripheral slot.....	80
ROM or PROM, expansion.....	84
running machine language programs.....	48

-- S --

saving to cassette tape.....	46
schematic, keyboard.....	101
schematic, power supply.....	93
schematic, main board.....	110
screen format.....	11
screen format, Text.....	16
screen format, High-Res.....	21
screen format, Low-Res.....	18
screen pages.....	12
screen soft switches.....	12
screen, the text.....	16
screen, the Low-Res.....	18
screen, the High-Res.....	21
set, 6502 instruction.....	Appendix A
setting up the Apple.....	2
signals and relationships, timing.....	91
single-bit pushbutton inputs.....	78
slot I/O, peripheral.....	79
slot RAM, peripheral.....	82
slot ROM, peripheral.....	80
soft entry vector.....	37
soft switches.....	12, 79, 98
soft switches, screen.....	12
speaker connector.....	105
special locations, list of.....	Appendix B
special locations, video display.....	13
special locations, input/output.....	25
special locations, text window.....	31
special locations, Autostart ROM.....	37
special locations, Monitor.....	65
special locations, keyboard.....	6
special locations, I/O.....	79
stack, page one (system.....	69
standard input subroutine, RDKEY.....	32
standard output subroutine, COUT.....	30
start, cold.....	36
start, lukewarm.....	36
start, warm.....	36
STEP and TRACE.....	26, 51
Stop-List feature, the.....	26, 30
strobe output, utility.....	25
strobe outputs.....	78
strobe, clearing the keyboard.....	6
subroutine, COUT standard output.....	30
subroutine, RDKEY standard input.....	32
subroutines, some useful Monitor.....	61

suggestions, I/O programming	80
summary of Monitor commands	59
supply features, power	92
supply schematic, power	93
supply, the Apple power	2, 28, 92
switches, soft	12, 79, 98
switches, screen soft	12
switches, toggle	79
switches, COUT, KEYIN	83
switches, CSW/KSW	83
system memory map	68
(system stack), page one	69
system timing	90

-- T --

tape, saving to cassette	46
tape, reading from cassette	47
text mode, inverse	32
text mode, normal	32
text screen, the	11, 16
text video mode, the	14
text window special locations	31
text window, the	31
timing signals and relationships	91
timing, system	90
toggle switches	79
TRACE, STEP and	26, 51

-- U --

"USER 1" jumper	99
useful Monitor subroutines, some	61
utility strobe output	25

-- V --

values, Normal/Inverse control	32
varieties of Apples	25
vector, soft entry	37
video connector	9
video connector, auxiliary	9
video display	9
video display special locations	13
video generator, the	96
video mode, the text	14
video mode, the Low-Res	17
video mode, the High-Res	19
video output jacks	97

-- W --

warm start	36
window special locations, text	31

window, the text	31
------------------------	----

-- Y --

your own commands, creating	57
-----------------------------------	----

-- Z --

zero page memory maps	74
zero, page	69, 74

INDEX OF FIGURES

Figure 1. Map of the Text screen	16
Figure 2. Map of the Low-Res mode	18
Figure 3. Map of the High-Res screen	21
Figure 4. Cursor-moving escape codes	35
Figure 5. System Memory Map	68
Figure 6. Memory Configurations	71
Figure 7. Configuration Block Pinouts	71
Figure 8. Expansion ROM Enable circuit	85
Figure 9. SCFXX decoding	85
Figure 10. The Apple Main Board	89
Figure 11. Timing Signals	91
Figure 12. Power Supply Schematic	93
Figure 13. ROM Pinout	95
Figure 14. RAM Pinouts	96
Figure 15. Auxiliary Video Connector	98
Figure 16. Game I/O Connector Pinout	100
Figure 17. Keyboard Schematic Drawing	101
Figure 18. Keyboard connector Pinout	103
Figure 19. Power Connector	104
Figure 20. Speaker Connector	105
Figure 21. Peripheral Connector Pinout	106
Figure 22. Main Board Schematic	110-115

INDEX OF PHOTOS

Photo 1. The Apple II	2
Photo 2. The Apple Power Supply	3
Photo 3. The Apple Keyboard	6
Photo 4. The Video Connectors	10
Photo 5. Eurapple jumper pads	11
Photo 6. The Apple Character Set	14
Photo 7. The Game I/O Connector	23
Photo 8. The USER 1 Jumper	99


INDEX OF TABLES

Table 1. Keyboard Special Locations	6
Table 2. Keys and their ASCII codes	7
Table 3. The ASCII Character Set	8
Table 4. Video Display Memory Ranges	12
Table 5. Screen Soft Switches	13
Table 6. Screen Mode Combinations	13
Table 7. ASCII Screen Character Set	15
Table 8. Low-Resolution Colors	17
Table 9. Annunciator Special Locations	24
Table 10. Input/Output Special Locations	25
Table 11. Text Window Special Locations	31
Table 12. Normal/Inverse Control Values	32
Table 13. Autostart ROM Special Locations	37
Table 14. Page Three Monitor Locations	65
Table 15. Mini-Assembler Address Formats	66
Table 16. RAM Organization and Usage	69
Table 17. ROM Organization and Usage	72
Table 18. Monitor Zero Page Usage	74
Table 19. Applesoft II Zero Page Usage	74
Table 20. DOS 3.2 Zero Page Usage	75
Table 21. Integer BASIC Zero Page Usage	75
Table 22. Built-In I/O Locations	79
Table 23. Peripheral Card I/O Locations	80
Table 24. Peripheral Card PROM Locations	81
Table 25. I/O Location Base Addresses	82
Table 26. I/O Scratchpad RAM Addresses	83
Signal Descriptions:	
Table 27. Timing	90
Table 28. Auxiliary Video Output	97
Table 29. Game I/O Connector	100
Table 30. Keyboard Connector	102
Table 31. Power Connector	104
Table 32. Speaker Connector	105
Table 33. Peripheral Connector	107ff

CAST OF CHARACTERS

!	33
#	66
\$	50, 66
&	65
*	33, 38, 40
+	55
-	55
: (colon)	43
. (period)	41
<	45, 46
>	33
?	33
@	35
A	34
B	34
C	35
D	35
E	35
F	35
G	48
I	25, 35, 54
J	25, 35
K	25, 35
L	49
M	25, 35, 45
N	54, 55
R	47
S	52
T	52
V	46
W	47
CTRL B	54
CTRL C	30, 40, 54
CTRL E	53
CTRL G (bell)	30
CTRL H (←)	30, 33, 34
CTRL J (line feed)	30
CTRL K	55
CTRL P	54
CTRL S	26, 30
CTRL U (→)	33, 34
CTRL X	33
CTRL Y	57, 58
ESC	25, 34
RETURN	30, 33, 43
[8
\	8, 33
]	33
^	50
_	8



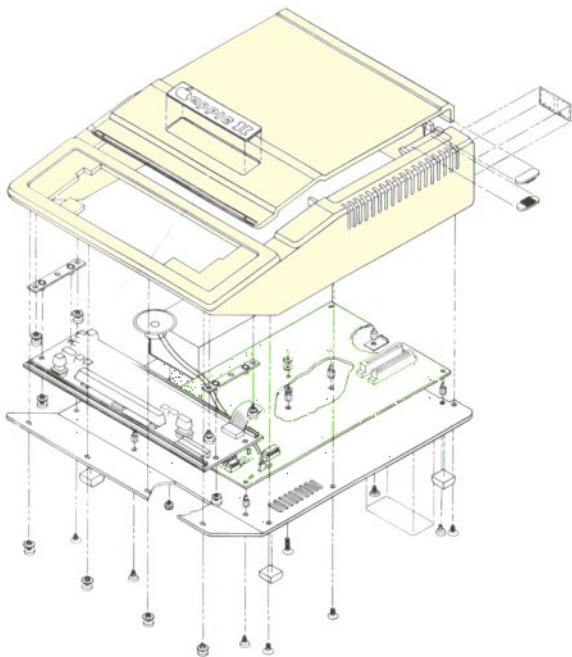



apple computer inc.

10260 Bandley Drive
Cupertino, California 95014

030-0004-C