

thompson1314@gmail.com

### PARTS LIST AND DESCRIPTIONS (Continued)

#### COILS (RF-IF)

| ITEM No. | USE       | DC RES. |      | REPLACEMENT DATA |                   |                |                 | NOTES<br>radiomuseum.org |
|----------|-----------|---------|------|------------------|-------------------|----------------|-----------------|--------------------------|
|          |           | PRI.    | SEC. | SONORA PART No.  | MEISSNER PART No. | MERIT PART No. | MILLER PART No. |                          |
| L1       | Loop Ant. | .2Ω     | 2.1Ω | N-8002           |                   |                |                 | Pri. tapped @ .2Ω        |
| L2       | Osc. Coil | 4.8Ω    | 7Ω   | N-7982           |                   |                |                 |                          |
| L3       | Input IF  | .7Ω     | 15Ω  | N-7981           | 16-8758           | BC-352         | 69-Osc. †       |                          |
| L4       | Output IF | 13Ω     | 13Ω  | N-7981           | 16-8758           | BC-353         | 12-C1<br>12-C2  |                          |


† Drill mounting hole.

#### SPEAKER

| ITEM No. | RATINGS |       |            | REPLACEMENT DATA   |                     |               | NOTES                  |
|----------|---------|-------|------------|--------------------|---------------------|---------------|------------------------|
|          | SIZE    | FIELD | V. C. IMP. | SONORA PART No.    | JENSEN PART No.     | QUAM PART No. |                        |
| SP1      | 5"      | PM    | 3.4Ω       | N-7980<br>N-7981 ① | ST-105<br>Mod. P5-X | 5A1           | ① Alternate PM speaker |

#### MISCELLANEOUS

| ITEM No. | PART NAME   | SONORA PART No. | NOTES                  |
|----------|-------------|-----------------|------------------------|
| M1       | Tuning Cap. | N-7983          | (17-370MMF, 19-127MMF) |
|          | Cabinet     | 314             | Model 314              |
|          | Cabinet     | 315             | Model 315              |
|          | Cabinet     | 379             | Model 379              |
|          | Cabinet     | 441             | Model 441              |
|          | Cabinet     | 442             | Model 442              |
|          | Cabinet     | 477             | Model 477              |
|          | Cabinet     | 478             | Model 478              |
|          | Knob        | N-8003          | Ivory - 2 used         |
|          | Knob        | N-8004          | Walnut - 2 used        |
|          | Screen      | N-8005          | Flocked dial           |

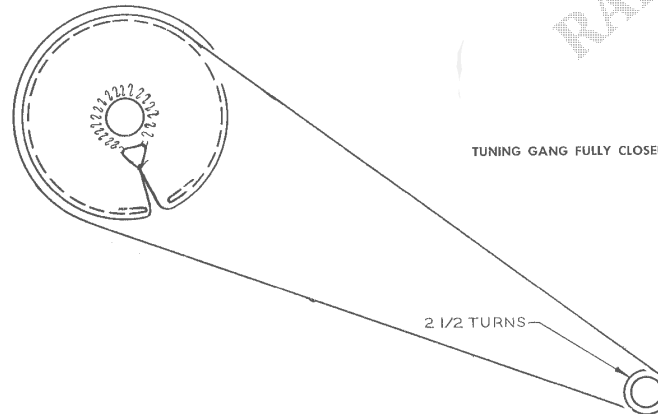

SET 253 FOLDER 13

#### DRIVE CORD STRINGING

SONORA MODEL 314

### CHASSIS—BOTTOM VIEW

