MANUAL OF 1948 MOST-OFTEN-NEEDED RADIO DIAGRAMS

the hallicrafters co. MODEL S-38

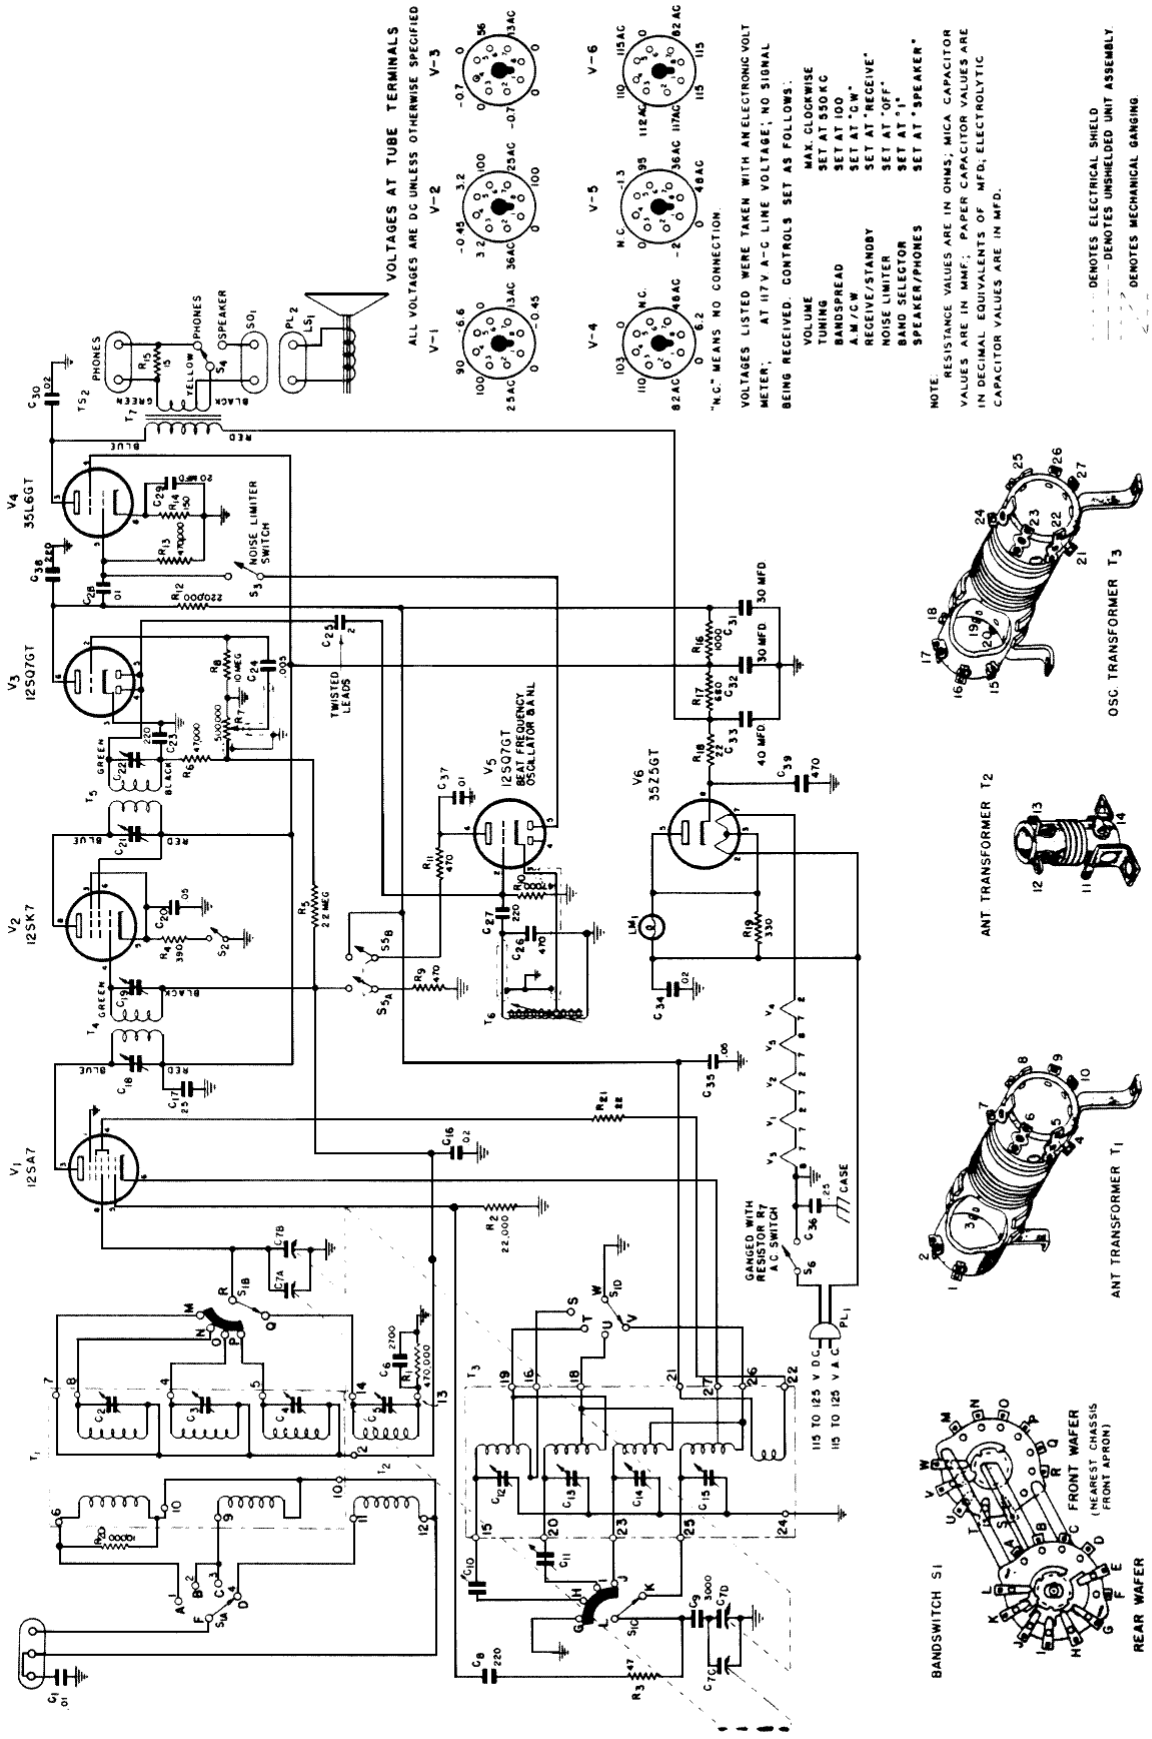

NOTE: DIMENSIONS & PROPORTIONS SHOWN IN PICTORIAL VIEWS HAVE BEEN EXAGGERATED FOR CLARITY OF TERMINAL LUG LOCATION.

DETAILED SERVICE INFORMATION

IF FREQUENCY	IF SELECTIVITY	IMAGE RATIO	SENSITIVITY	AUDIO OUTPUT
455 kc	7 kc wide at 6 db down 65 kc wide at 60 db down (for 50 milliwatt output)	2.7:1 at 30 mc 6:1 at 14 mc 10:1 at 5 mc 35:1 at 1500 kc	12 microvolt at 600 kc 12 microvolt at 5 mc 11 microvolt at 14 mc 23 microvolt at 30 mc (for 50 milliwatt output)	675 milliwatt with less than 10% distortion at 400 cycles

www.radiomuseum.org; upload by Walter Wiesmüller † May 2012; download by Theodore Thompson Sat May 05 22:09:55 CEST 2018 [1496 x 2066, 169kb, ? DPI]