

## RB12P Reference Speakers



## SPECIFICATIONS MODEL RB12P

MAX POWER

350 Watts

IMPEDANCE

8  $\Omega$  (Ohms)

CONNECTIONS

Two 4 pole speakON wired in Parallel

**SPEAKERS** 

12" HD Woofer w/ 56oz <u>Ferrite</u> magnet 1<sup>3</sup>/4" Titanium compression driver 2 SuperTweeters

DIMENSIONS

16 <sup>3</sup>/4" Wide 23" High

13" Deep

WEIGHT

40.51bs

PLACEMENT OPTIONS

Pole mount socket for 1 <sup>3</sup>/8" stand 4 Rubber feet for standing upright 2 Brackets for "Monitor Wedge" positioning "Fly Points" for hanging installations\*

The NEW "Gig Rig



2- Connections to the RB12P are made via "1+" and "1-" of the 4 pole speakON connector. "2+" and "2-" are not used.

## WARNING!

\* Suspending any speaker cabinet can be dangerous and requires special care, safety rigging, and the use of appropriate hardware. Therefore Speakeasy and it's authorized agents explicitly decline support or responsibility for such installations.

Whenever such installations are to be performed a structural engineer and other appropriate and certified professionals must be consulted.

Failure to do so may result in the cabinet falling and causing property damage, serious personal injury, or even death for which Speakeasy Vintage Music, Inc. and it's agents will not be responsible.

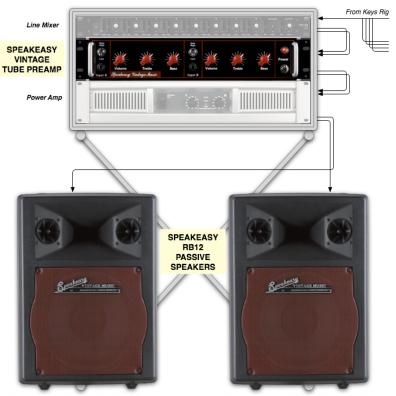


Diagram is meant to demonstrate general connections only -- line mixer, power amp, rack case, stand, and cables are not included